

Intan.pdf

by

FILE	INTAN.PDF (1.18M)	WORD COUNT	3248
TIME SUBMITTED	15-FEB-2021 05:07AM (UTC+0700)	CHARACTER COUNT	17688
SUBMISSION ID	1509377894		

A Switched Beamforming of Fully Shielded Six Parasitic Planar Array for IoT Network

³Priska Wina
Electrical Engineering Department
Universitas Hasanuddin
South Sulawesi, Indonesia
pris001@kominfo.go.id

³Wardi
Electrical Engineering Department
Universitas Hasanuddin
South Sulawesi, Indonesia
wardi@unhas.ac.id

Sunarno
Nuclear and Physics Engineering
Universitas Gadjah Mada (UGM)
Yogyakarta, Indonesia
E-mail: sunarno@ugm.ac.id

Elyas Palantei
Electrical Engineering Department
Universitas Hasanuddin
South Sulawesi, Indonesia
E-mail: elyas_palantei@unhas.ac.id

³Merma Baharuddin
Electrical Engineering Department
Universitas Hasanuddin
South Sulawesi, Indonesia
mema@unhas.ac.id

¹⁵Eko Setijadi
Electrical Engineering Department
Institut Teknologi Sepuluh Nopember
(ITS), Surabaya, Indonesia
E-mail: e_setijadi@ee.its.ac.id

Intan Sari Areni
Electrical Engineering Department
Universitas Hasanuddin
South Sulawesi, Indonesia
E-mail: intan@unhas.ac.id

Dewiani
Electrical Engineering Department
Universitas Hasanuddin
South Sulawesi, Indonesia
dewiani@unhas.ac.id

Arif Hidayat
LAPAN Pare-Pare
South Sulawesi, Indonesia
E-mail: arif.hidayat81@gmail.com

Abstract— An optimized switched parasitic smart antenna (SPSA) 915 MHz that consists of 6 monopole parasitic wires encircled a single feeding monopole wire and configured on top of a 328 mm circular ground plane was manufactured and evaluated. SPSA prototype is initially designed to support the practical operation of a particular IoT based surveillance network within the university campus environment. In practical, the constructed antenna installed at a server station will continuously detect the particular active sensor node and maintain the connection and the data transfer between sensor node and the server. A slightly different switched beamforming technique deployed on the fully shielded cover seven monopole wires planar array by electronically setting-up 3 parasitic wires to be grounded and three other floating at the same time in order to point the power beam into a certain direction. Through the sequential variations of those wires set-up then the main lobe directions would be pointed to 6 different directions, i.e. 0°/360°, 60°, 120°, 180°, 240°, and 300°.

Keywords—915-MHz, SPSA, Switched Beamforming, IoT Network, Environmental Surveillance, RF-Switching and Planar Array

I. INTRODUCTION

The fast development and deployment of IoT technology have recently allowed the various connections of valuable things through the wide internet infrastructure. A large varieties of IoT applications has emerged as the main breakthrough tools to strengthen some other technology solutions such as smart city, smart farming, smart building, environmental surveillance, road traffic management and control and so on and so forth. The powerful performance of

the IoT network operation relies on the wireless sensor network qualities to perform the data sensing and transferring from one sensor node to the main central station [1-2] via a gateway. There are several numbers of critical natural phenomena existed throughout a particular IoT network during the data propagation. These are including shadowing, interference, network connectivity, and power consumption efficiency. All the factors might be limiting the number of the IoT sensor nodes could be deployed [3].

The solution to overcome the issues related to the IoT-based system mentioned above is to integrate an adaptive reconfigurable antenna on the RF front-end [4]. This type of antenna has the ability to change one or more parameters such as the resonant frequency and radiation pattern in real-time without changing the antenna structure. Radiation pattern reconfigurable antenna is a smart antenna system that can mitigate the phenomenon of propagation because of its ability to direct the beam in the desired direction while pressing the beam in an unwanted direction, thus increasing antenna functionality and making it more flexible.

Reconfiguration of the antenna radiation pattern can conventionally be achieved with a phased array antenna [5]. But this antenna system is more complicated because it requires an antenna array and phase shifters, and requires more costs [6]. However, as reported in some literature, it provides an alternative solution to reduce the complexity of the antenna beam steering. Antenna reconfiguration can be done with optical switch [7], PIN diode [8], varactor diode [9], RF-MEM [10], and FET transistor [11]. Of these, the simplest way to set the antenna beam is with a PIN diode. PIN diodes have the advantage of being cheaper, easy to

fabricate, fast response and capability at relatively high power [12]. The beam switching mechanism is easily performed by a PIN diode in the ON-OFF switch configuration.

Apart from the advantages of using a PIN diode, because the diode is an active component, using a PIN diode as an RF switch requires additional passive components such as capacitors and inductors for DC bias circuits which will affect antenna performance such as radiation patterns, return loss and antenna gain.

On the other hand, several studies on radiation pattern reconfigurable antennas using parasitic array elements as beam forming are presented in [13], without implementing a PIN diode as its RF switch. Switched beam antennas with six parasitic elements and provide 5 beam directions were introduced in [14-15], in which the DC bias circuit uses only current limiting inductors and resistors, resulting in large SLL and back lobe in undesirable directions by adjusting the DC bias voltage variation. A reconfigurable switched parasitic array pattern in the form of a patch antenna is also presented in [16]. Although, the displacement of the radiation pattern covers all directions, it produces a wide beam in the azimuth plane.

In this paper, we propose a parasitic array switch antenna consisting of six parasitic elements and one active element operating at LoRa frequency of 915 MHz. This antenna can provide 6 beam directions as well as increased gain and directivity of the antenna, and can easily be integrated with IoT network gateways according to the points where sensor nodes are located without manually resetting the antenna installation. The antenna beam setting is done using a PIN diode, and in contrast to [14-15], the DC bias circuit is added with a bypass capacitor component that functions as an insulator when the RF switch is OFF. The effect of using a PIN diode on antenna performance will be investigated. The antenna design and structure were investigated using CST Microwave Studio 2018.

II. ANTENNA DESIGN AND STRUCTURE

A. Antenna Geometry

A 3D-numerical modeling of the proposed antenna structure is shown in Figure 1. The intelligent antenna consists of two wire element types, namely the active element positioned on the center ground plane and six parasitic elements surrounding the active element. The designed antenna has been fully shielded with a particular polycarbonate cover material to protect the whole antenna body and circuitry from unwanted physical and chemical materials interaction or climate change effects. In transmit mode, the active element will continuously emit certain amount of RF power fed from the SMA connector soldered onto the PCB. However in the receiving mode, it absorbs the energy and passing through RF- part to be post processed before extracting the intended baseband signals. All physical structures of SPSA include active and parasitic elements dimension, the ground plane size, the distance between elements, the type of physical cover material, and the size of

cover material were optimized to allow the antenna operation to be stable at a frequency of 915 MHz. The ground plane cylindrical plate is made of aluminum with a diameter 328 mm, the height 74 mm and a thickness of 2 mm. While the length of the monopole element is 74 mm.

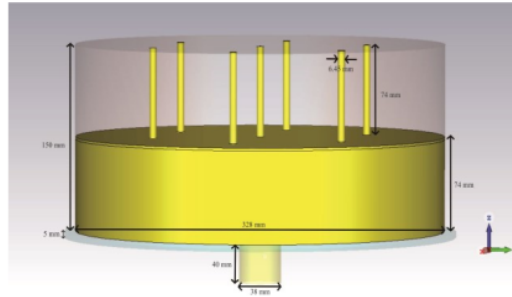


Fig. 1. A 3D-numerical modeling of the proposed SPSA with packaging cover

At the bottom side of the circular ground plane, a PCB is attached to a ring-shaped RF switch circuit with a radius of 227 mm. The PCB is also used as a place for the six parasitic elements to stand. These are shown in Figure 2. A close-up view of the RF switch circuit using a PIN diode is also shown on it. To steer the beam direction of SPSA the activation of each RF switching part will play very important task to set-up the status of every parasitic element to be ON (grounding) or OFF (floating). The RF switch activation experiments of both numerical computing and practical testing to examine the discrete beamforming technique applied to the designed SPSA is tabulated in Table 1. The six parasitic elements are connected to ground via six PIN diodes. After configuring 2 pin ON and 4 pin OFF, and configuration 4 pin ON and 2 pin OFF, the best result are obtained with 3 pin ON and 3 pin OFF configurations (S6-S1-S2 ON and S3-S4-S5 OFF, etc.). These PIN diodes configuration are the best set-up to obtain better gain, better sharp main lobe, and better directivity. Parasitic elements that short to the ground will act as a reflector and the unconnected element (open) will act as the director. This configuration makes it possible to easily varying the antenna radiation pattern through 360° rotation electronically. The beam alteration is in every 60° step.

TABLE I. RF-SWITCH CONFIGURATION AND ITS CORESPONDING BEAM DIRECTION STEERING

Azimuthal Angle	Switch Element Number					
	S1	S2	S3	S4	S5	S6
0°	ON	ON	OFF	OFF	OFF	ON
60°	ON	ON	ON	OFF	OFF	OFF
120°	OFF	ON	ON	ON	OFF	OFF
180°	OFF	OFF	ON	ON	ON	OFF
240°	OFF	OFF	OFF	ON	ON	ON
300°	ON	OFF	OFF	OFF	ON	ON

III. RESULT AND DISCUSSIONS

The 3D-numerical computing activities described in Figure 1 and 2, respectively, have successfully produced several number of interesting results including the reflection coefficient (S11), bandwidth, the resonance frequency and the beam pattern direction variability as the effect of the different RF-switch configurati[6] alterations. The computing results are depicted in Figs 4 (a) and (b), respectively.

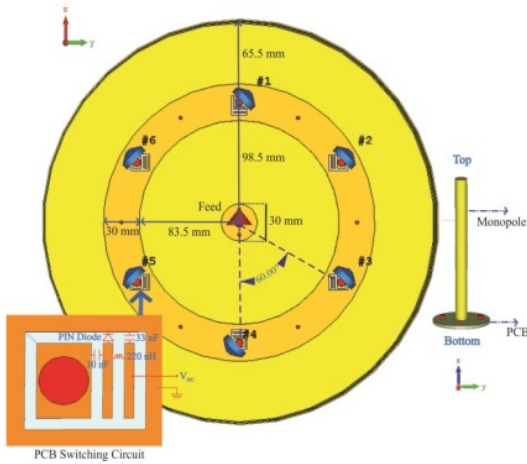


Fig. 2. Bottom view of switch parasitic array antenna. The inset is the close up view of switching circuit.

B. DC Biasing Circuit for RF PIN Diode

The PIN diode to act as an RF switch requires a DC bias circuit to work. The PIN diode used as a switch is HSMP 3824 device. This RF electronic part is easily modeled using a lumped element equivalent circuit consisting of an inductor (L), capacitor (C) and resistor (R) on the numerical computing process applying CST software. The equivalent circuit diagram of the PIN diode is shown in Figure 3. The ON condition of the diode is represented as a series RL circuit and when the switch is OFF it is represented as a parallel RLC circuit. The optional values for setting-up the intended PIN diode configuration are listed in Table 2.




Fig. 3. Equivalent circuit of PIN diode switch: (a) ON and (b) OFF

TABLE II. PARAMETER VALUE OF EQUIVALENT RLC CIRCUIT

State	Parameters		
	R(Ω)	L(nH)	C(nF)
ON	1	220	-
OFF	1M	220	10

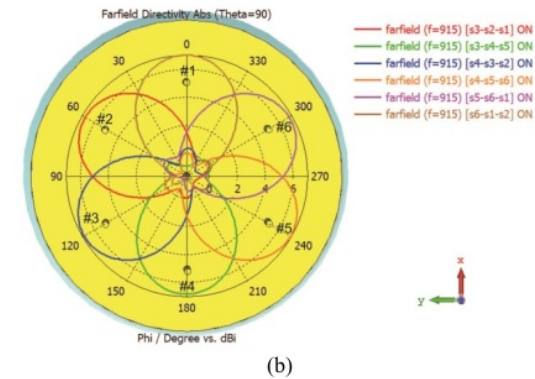
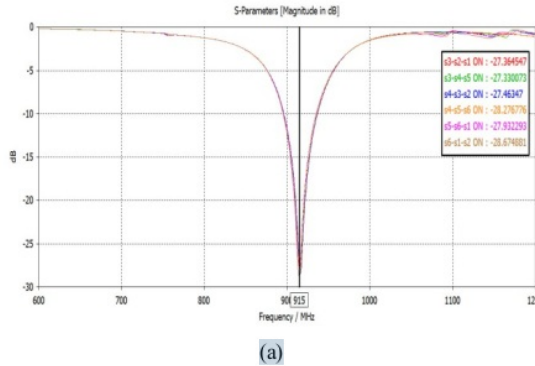


Fig. 4. The 3D-numerical computing results of the designed SPSA employing the sequential tracking algorithm for maintaining the communication link between IoT sensor node and server node: (a) reflection coefficient S₁₁ (dB) and (b) radiation pattern for six RF-switch configurations.

It is obviously that the accurate placement of each monopole wire element in the planar geometrical area of 3D-numerical computing SPSA is highly influencing the matching impedance of whole antenna prototype. The reflection coefficients recorded from all RF-Switch configurations exhibit the same values and identical graphical profiles both in the lower frequency operation and the higher frequency operation. The operational bandwidth is approximately 50 MHz could be achieved (see Fig. 4 (a)). The return loss value

at the center frequency is pretty good and it is achieving almost -30 dB. This is equal to 1.2 VSWR. Varying the RF-switch operation status as listed in Table 1 then the exact similar beam pattern direction will be generated through the 3D-computing. SPSA beam direction might be varied to $0^\circ/360^\circ$, 60° , 120° , 180° , 240° , and 300° . These are illustrated in Fig. 4 (b).

Another interesting computing result regarding the beam steering technique applied for SPSA is illustrated in Fig.5. The maximum gain could be provide is in the direction 0° and the values is about 7 dBi.

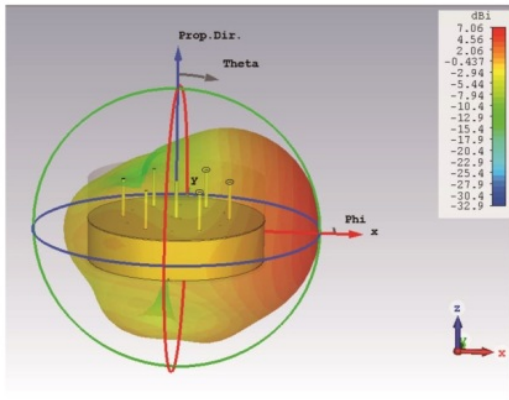


Fig. 5. Simulated 3D radiation pattern [10] 915 MHz for RF-switch configuration s6-s1-s2 ON with passive element shorten to the ground marked by black circle lines.



Fig. 6. The fabricated SPSA 915 MHz fully covered with the polycarbonate material.

The fabricated SPSA 915 MHz is fully covered with polycarbonate materials. The upper side shielding is transparent material and the lower side is untransparent one. This cover selection was implemented to allow the easy repairing and maintaining whole SPSA prototype in case of

the technical operation problems occurred. Underneath of each parasitic wire element, RF-switching network is directly soldered. A certain terminal of the network is connected to a circular PCB track (see Figs 7 (a) and (b)). The impact of the RF-switching unit network configuration alterations to SPSA antenna operation is depicted in Fig.8. Based on Fig.8, it is apparently confirmed that the return loss values will vary about 1 to 7 dB while each switching set-up altered.

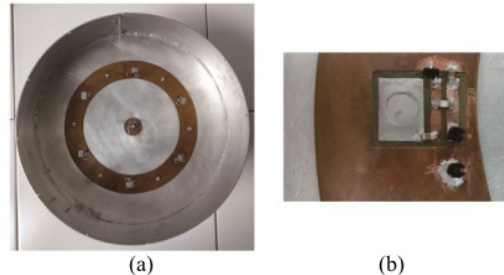


Fig. 7. Bottom view of the fabricated SPSA: (a) Bottom Grounding Plane, (b) RF-switching circuit

Figure 7 (b) shows the RF switch circuit, where the PIN diode, inductor and capacitor components are soldered to the PCB. The inductor / RF choke is connected to $+V_{DC}$ and the diode anode is used to isolate the RF current from the antenna so as not to interfere with the DC bias supply. While the $-V_{DC}$ terminal is connected directly to the diode cathode to the antenna ground plane. A DC blocking capacitor is added to the circuit to pass RF current and block DC current, while a bypass capacitor is added after the RF choke to isolate the RF current from the DC bias supply. Small capacitance value was applied in order to minimize RF leakage when the diode is OFF.

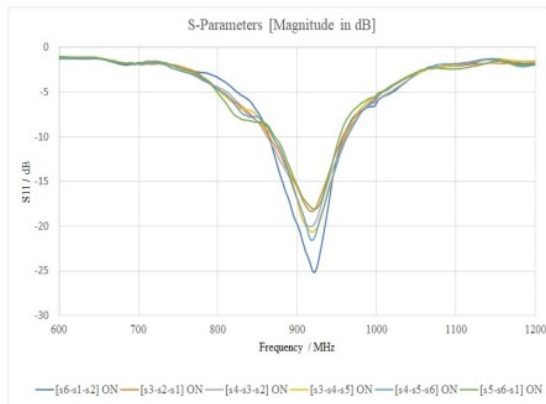


Fig. 8. Reflection coefficient variation of the proposed SPSA antenna for all switch configurations in order to steer the beam direction into the angle $0^\circ/360^\circ$, 60° , 120° , 180° , 240° , and 300° .

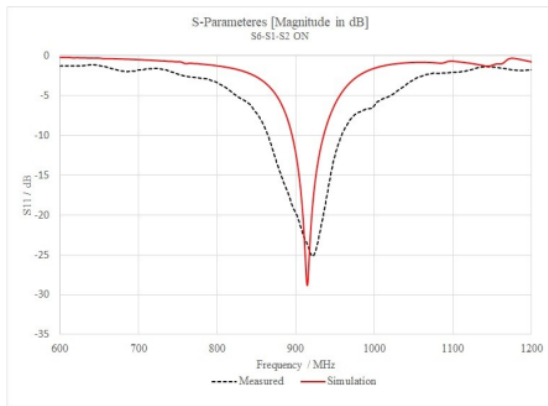


Fig. 9. The return loss values comparison between the simulated S_{11} and the measured one for a particular direction 0/360 degrees by configuring the RF-switching S1-S2-S6 ON and other three RF-switching OFF.

Through the proper RF-PIN diode switching operation variation, ON and OFF, then the beam power radiation/reception might be steered consistently to point to 6 different directions.

The measurement results are shown in Figure 9 and Figure 10, which indicate that the antenna can direct its beam to the six radiation directions by adjusting the switch configuration. The achieved reflection coefficient is less than -10 dB for all switch configurations at 915 MHz. There was a shift in the measured reflection coefficient to be 6 dB higher with lower return loss than the simulation results. Likewise, in the measured radiation pattern, it can be observed that the side lobe level is still greater than the simulation results. These changes might be occurred due to some technical problems including fabrication tolerances, material losses, SMA connectors, and DC bias circuit influence.

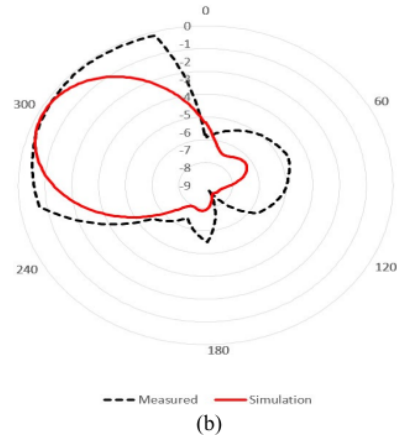
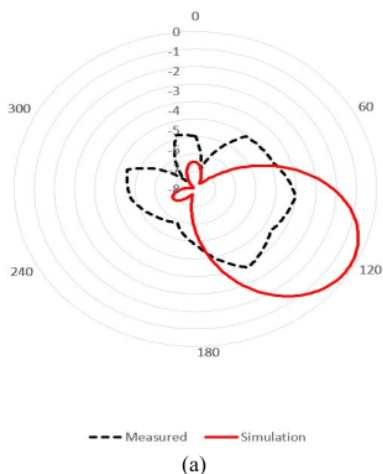


Fig. 10. Radiation pattern measured antenna (a) s5-s6-s1 ON, (b) s4-s3-s2 ON

IV. CONCLUSION

Various technical difficulties on the development of the switched parasitic smart antenna (SPSA) 915 MHz has been analytically assessed. A number of technical issues regarding the construction difficulties to convert the SPSA numerical model into the manufactured one has been extensively presented and discussed. It is apparently confirmed that the accuracy of the monopole wires placement on the planar circular ground area, the RF-PIN diode switching consistency, and the proper configuration of intelligent transceiver part will have significant impact to the whole SPSA performance, not only in the context of S_{11} parameter variation but also influence the beam pattern quality generated.

ACKNOWLEDGMENT

The authors would like to thank the Ministry of Research and Technology/BRIN, Republic of Indonesia for supporting ICT R&D group at Universitas Hasanuddin together with others research collaborators such as UGM, ITS, and PT. (Persero) LAPAN Pare-Pare to conduct various ICT R&D focusing on the smart antennas for various applications.

REFERENCES

- [1] M. T. Lazarescu, "Design of a WSN Platform for Long-Term Environmental Monitoring for IoT Applications," *IEEE Journal on Emerging and Selected Topics in Circuits and Systems*, vol. 3, no. 1, Mar. 2013, pp. 45 – 54.
- [2] R. Fantacci, T. Pecorella, R. Viti, and C. Carlini, "A network architecture solution for efficient IOT WSN backhauling: challenges and opportunities," *IEEE Wireless Communications*, vol. 21, no. 4, Aug. 2014, pp. 113 – 119.
- [3] P. Sotres, J. R. Santana, L. Sánchez, J. Lanza, and L. Muñoz, "Practical Lessons From the Deployment and Management of a Smart City Internet-of-Things Infrastructure: The SmartSantander Testbed Case," *IEEE Access*, vol. 5, 2017, pp. 14309-14322.

- [4] T. Sabapathy, M. F. Jamlos, R. B. Ahmad, M. Jusoh, M. I. Jais, and M. R. Kamarudin, "Electronically Reconfigurable Beam Steering Antenna Using Embedded RF PIN Based Parasitic Arrays (ERPA)," *Progress In Electromagnetics Research*, Vol. 140, 2013, pp. 241-261.
- [5] S. K. Sanyal, Q. M. Alfred, and T. Chakrawarty, "A Novel Beam Switching Algorithm For Programmable Phased Array Antenna," *Progress In Electromagnetics Research*, Vol. 60, 2006, pp. 187-196.
- [6] T. Yuan, N. Yuan, J. L.-W. Li, and M.-S. Leong, "Design and Analysis of Phased Antenna Array With Low Sidelobe by Fast Algorithm," *Progress In Electromagnetics Research*, Vol. 87, 2008, pp. 131-147.
- [7] I. F. da Costa, et al. "Optically controlled reconfigurable antenna for 5G future broadband cellular communication networks." *Journal of Microwaves, Optoelectronics and Electromagnetic Applications*, Vol. 16 (1), 2017, pp. 208-217.
- [8] T. Sabapathy, R. B. Ahmad, M. Jusoh, M. R. Kamarudin, and A. Alomainy "A Pattern Reconfigurable Parasitic Patch Antenna Using BAR and HPND PIN Diode," *Proceedings of The 8th European Conference on Antennas and Propagation (EuCAP 2014)*, 2014.
- [9] Ojefors, E., C. Shi, K. From, I. Skarin, P. Hallbjomer, and A. Rydberg, "Electrically steerable single-layer microstrip traveling wave antenna with varactor diode based phase shifters," *IEEE Transactions on Antennas and Propagation*, Vol. 55, 2007, pp. 2451-2460.
- [10] Petit, L., L. Dussopt, and J. M. Laheurte, "MEMS-switched parasitic-antenna array for radiation pattern diversity," *IEEE Transactions on Antennas and Propagation*, Vol. 54, 2006, pp. 2624-2631.
- [11] T. Aboufoul, A. Alomainy, and C. Parini, "Reconfigurable UWB monopole antenna for cognitive radio applications using GaAs FET switches," *IEEE Antennas Wireless Propag. Lett.*, vol. II, 2012, pp. 392-393.
- [12] Majid, H. A., M. K. Abd Rahim, M. R. Hamid, and M. F. Ismail, "Frequency reconfigurable microstrip patch-slot antenna with directional radiation pattern," *Progress In Electromagnetics Research*, Vol. 144, 2014, pp. 319-328.
- [13] A. Kausar, H. Mehrpouyan, M. Sellathurai, R. Qian, and S. Kausar, "Energy efficient switched parasitic array antenna for 5G networks and IoT," in *Proc. 2016 Loughborough Antennas & Propagation Conference (LAPC)*, Loughborough, UK, Nov. 2016, pp. 1-5.
- [14] E. Palantei dan D. V. Thiel, "The Impact of Bias Voltage on The Performance of PIN Diode Loaded Smart Antenna," *Journal of The Japan Society of Applied Electromagnetics and Mechanics*, vol. 15 no. 3, September 2007. pp. 274-277.
- [15] E. Palantei dan D. V. Thiel, "Symmetry Problems in Switched Parasitic Smart Antenna," *IEEE International Symposium on Antennas and Propagation Society (APS)*, Honolulu, HI, USA, 9-15 June 2007.
- [16] R. Konch, A. Sarma, S. Goswami, and K. Sarmah, "Design of a Pattern Reconfigurable Switched Parasitic Array for Null Steering Application," *Proceedings of 2nd International Conference on Electronics, Materials Engineering and Nano-Technology (IEMENTech)*, 2018.

% **10**
SIMILARITY INDEX

%
INTERNET SOURCES

% **10**
PUBLICATIONS

%
STUDENT PAPERS

PRIMARY SOURCES

1 Mahmoud Shirazi, Tianjiao Li, Xun Gong. "Effects of PIN diode switches on the performance of reconfigurable slot-ring antenna", 2015 IEEE 16th Annual Wireless and Microwave Technology Conference (WAMICON), 2015 % **1**
Publication

2 Sufianti Munirman, Elyas Palantei, Merna Baharuddin, Zulfahmi Rizal. "An IoT Wearable Communication Prototype Tested in Indoor and Outdoor Environments", 2020 IEEE International Conference on Communication, Networks and Satellite (Comnetsat), 2020 % **1**
Publication

3 Dewiani Djamaluddin, Wulansari Darawijaya, Merna Baharuddin. "Soft Decision Viterbi Decoder For Free Space Optical Through Maritime Atmosphere Channel", 2018 International Conference on Applied Science and Technology (iCAST), 2018 % **1**
Publication

4

T. Sabapathy, M. F. Jamlos, R. B. Ahmad, M. Jusoh, M. I. Jais. "The effect of isolation loss towards the beam steering of a parasitic patch array antenna", 2013 IEEE International RF and Microwave Conference (RFM), 2013

Publication

% 1

5

Elyas Palantei, Dewiani, Asrul Ramadhan, Sigit Lukman. "A Smart Card based Campus Dental Clinic Services: Experimental Tests", 2019 IEEE International Conference on Communication, Networks and Satellite (Comnetsat), 2019

Publication

% 1

6

E. Palantei, M. Baharuddin, Andani A., Nien K.N., D. Utami, A.E.A. Febriani, U. Umar, M. Agus. "A 2.5 GHz wireless ECG system for remotely monitoring heart pulses", Proceedings of the 2012 IEEE International Symposium on Antennas and Propagation, 2012

Publication

% 1

7

"Comnetsat 2020 Table of Contents", 2020 IEEE International Conference on Communication, Networks and Satellite (Comnetsat), 2020

Publication

% 1

8

Advances in Intelligent Systems and Computing, 2016.

Publication

% 1

9

Muzammil Jusoh, Thennarasan Sabapathy, Mohd Faizal Jamlos, Muhammad Ramlee Kamarudin. "Reconfigurable Four-Parasitic-Elements Patch Antenna for High-Gain Beam Switching Application", IEEE Antennas and Wireless Propagation Letters, 2014

Publication

<% 1

10

Mateusz Burtowy, Mateusz Rzymowski, Lukasz Kulas. "Low-Profile Espar Antenna For Rss-Based Doa Estimation In Iot Applications", IEEE Access, 2019

Publication

<% 1

11

"Proceedings of 2nd International Conference on Micro-Electronics, Electromagnetics and Telecommunications", Springer Science and Business Media LLC, 2018

Publication

<% 1

12

Abdul Quddious, Muhammad Ali Babar Abbasi, Marco A. Antoniadis, Photos Vryonides, Vincent Fusco, Symeon Nikolaou. "Dynamically Reconfigurable UWB Antenna Using an FET Switch Powered by Wireless RF Harvested Energy", IEEE Transactions on Antennas and Propagation, 2020

Publication

<% 1

13

Kainan Zhao. "Bandwidth enhancement of PESPARE antenna by using inconsistent patch

<% 1

elements", 2008 IEEE Antennas and Propagation Society International Symposium, 07/2008

Publication

14

"2020 7th International Conference on Smart Structures and Systems (ICSSS) - Full Conference Proceedings", 2020 7th International Conference on Smart Structures and Systems (ICSSS), 2020

Publication

15

"Application of A* (A Star) Algorithm on Automation of Trash Can", International Journal of Recent Technology and Engineering, 2019

Publication

16

Lecture Notes in Electrical Engineering, 2015.

Publication

17

Alaa Imran Al-Muttairi, Malik Jasim Farhan. "The effect of diodes integrated on radiating patch or ground plane of frequency reconfigurable antenna on antenna performance - a Comparison study", 2019 First International Conference of Computer and Applied Sciences (CAS), 2019

Publication

18

Dewiani, Elyas Palantei, Rayvaldo Stefan Madika, Merna Baharuddin, Syafruddin Syarif. "Design of Reconfigurable Planar Inverted F

<% 1

<% 1

<% 1

<% 1

<% 1

Antenna for 5G Implementation", 2019 IEEE International Conference on Communication, Networks and Satellite (Comnetsat), 2019

Publication

EXCLUDE QUOTES ON

EXCLUDE ON
BIBLIOGRAPHY

EXCLUDE MATCHES < 5
WORDS