

PROCEEDING

**The 8th Joint Conference on
Renewable Energy and
Nanotechnology 2019
(JCREN 2019)**

ISBN 978-979-18011-3-3

November 5-6, 2019

**Gowa Campus, Hasanuddin University,
Indonesia**



HIROSHIMA UNIVERSITY



จฬาลงกรณ์
มหาวิทยาลัย
FACULTY OF SCIENCE



EHIME UNIVERSITY



Kyutech
KYUSHU UNIVERSITY OF TECHNOLOGY



OCHANOMIZU UNIVERSITY



YAMAGUCHI
UNIVERSITY



NANOTECTM
a member of NSTDA

KMITL
พระจอมเกล้าลาดกระบัง



มหาวิทยาลัย
เทคโนโลยีพระจอมเกล้า
พระนครเหนือ



Sponsored by:

TOYO KOATSU



PROCEEDING

**The 8th Joint Conference on Renewable
Energy and Nanotechnology 2019**

(The 8th JCREN 2019)

Improving International Networks and
Research Collaboration

Gowa Campus, November 5 – 6, 2019

Department of Mechanical Engineering
Faculty of Engineering
Universitas Hasanuddin
Indonesia

PROCEEDING
**The 8th Joint Conference on Renewable Energy and
Nanotechnology 2019**
(The 8th JCREN 2019)

Improving International Networks and Research Collaboration

Organized by :

Universitas Hasanuddin

Co-organized by :

Chulalongkorn University (CU), Ehime University (EU), Hiroshima University (HU), King Mongkut's Institute of Technology Ladkrabang (KMITL), Kyoto University (KU), Kyushu Institute of Technology (KIT), National Nanotechnology Center (NANOTEC), Okayama University (OU), Prince of Songkla University (PSU), Rangsit University (RSU), Tokyo University of Science (TUS), Yamaguchi University (YU)

Conference Chairs :

Andi Erwin Eka Putra (Universitas Hasanuddin), Chair

Yukihiro Matsumura (Hiroshima University), Vice chair/General manager

Tawatchai Charinpanitkul (Chulalongkorn University), Vice chair/Thai representative

Secretary : Azwar Hayat (Universitas Hasanuddin)

Treasurer : Novriany Amaliyah (Universitas Hasanuddin)

Steering Committee :

Muhammad Arsyad Thaha (Universitas Hasanuddin), Nasaruddin Salam (Universitas Hasanuddin),

Ilyas Renreng (Universitas Hasanuddin), Onny S. Sutresman (Universitas Hasanuddin), Wahyu H.

Piarah (Universitas Hasanuddin)

Reviewer :

Yukihiro Matsumura (Hiroshima University), Tawatchai Charinpanitkul (Chulalongkorn University),

Shinfuku Nomura (Ehime University), Ken-Ichiro TANOUE (Yamaguchi University), Andi Erwin

Eka Putra (Universitas Hasanuddin)

Editorial Board :

Achariya Suriyawong (Chulalongkorn University), Akihiko Horibe (Okayama University), Akihiko

Horibe (Okayama University), Anita Bt Ramli (Universiti Teknologi Petronas), Apiluck Eiad-ua

(King Mongkut's Institute of Technology Ladkrabang), Apinan Soottitantawat (Chulalongkorn

University), Chalida Klaysom (Chulalongkorn University), Esmat Maleki (University of Malaya),

Hiroshi Katsurayama (Yamaguchi University), Hiroki Suzuki (Yamaguchi University), Hiromichi

Toyota (Ehime University), Kajornsak Faungnawakij (National Nanotechnology Center), Ken-ichiro

TANOUE (Yamaguchi University), Kiyoshi Dowaki (Tokyo University of Science), Komkrit

Suttiaponparnit (PTT Research and Technology Institute), Kreangkrai Maneeintr (Chulalongkorn

University), Lam Man Kee (Universiti Teknologi Petronas), Machi Kanna (Hiroshima University),

Masato Mikami (Yamaguchi University), Masaya Nakahara (Ehime University), Minato Wakisaka

(Kyushu Institute of Technology), Nataporn Sowasod (King Mongkut's University of Technology

North Bangkok), Nawin Viriya-empikul (National Nanotechnology Center), Nor Hisham B Hamid (Universiti Teknologi Petronas), Noriaki Sano (Kyoto University), Nuttapol Limjeerajarus (Thai-Nichi Institute of Technology), Nuttapol Tanadchangsang (Rangsit University), Palang Bumroongsakulsawat (Chulalongkorn University), Paravee Vas-umnay (Chulalongkorn University), Pilasinee Limsuwan (King Mongkut's University of Technology North Bangkok), Pimporn Poonpetch (Chulalongkorn University), Pramote Puengjinda (Yamanashi University), Pusanisa Patharachotesawate (Chulalongkorn University), Sira Srinives (Mahidol University), Shinnichi Namba (Hiroshima University), Shinfuku Nomura (Ehime University), Shinobu Mukasa (Ehime University), Shinsuke Mochizuki (Yamaguchi University), Shuhei Inoue (Hiroshima University), Suracha Udomsak (SCG Chemicals), Sutee Chutipaijit (King Mongkut's Institute of Technology Ladkrabang), Suthatip Sinyoung (Mahidol University), Suwana Boontanon (Mahidol University), Suzana Bt Yusup (Universiti Teknologi Petronas), Takayuki Ichikawa (Hiroshima University), Takehiko Seo (Yamaguchi University), Trakarn Prapasongsa (Mahidol University), Varong Pavarajarn (Chulalongkorn University), Watcharop Chaikittisilp (The University of Tokyo), Wimonmas Boonyungyuen (Mahidol University), Winadda Wongwiriyan (King Mongkut's Institute of Technology Ladkrabang), Wipawadee Wongsuwan (Thai-Nichi Institute of Technology), Yasushi Shibuta (The University of Tokyo), Yoshisugu Kojima (Hiroshima University), Yutaka Nakashimada (Hiroshima University), Yuushou Nakayama (Hiroshima University).

Editor :

Azwar Hayat, Gerard Antonini Duma, Asriadi Sakka

Setting Layout : Muh. Firdan Nurdin

Publisher :

Department of Mechanical Engineering, Faculty of Engineering, Universitas Hasanuddin, Indonesia

Editorial Staff :

Jalan Poros Malino, Km. 6, Bontomarannu, Gowa, Sulawesi Selatan, Indonesia, 92171

<https://eng.unhas.ac.id/mesin/id/page/1033174/jcren-2019.html>

email: jcren2019@eng.unhas.ac.id

@2019. All rights reserved

ISBN 978-979-18011-3-3



9 789791 801133

Message from Chair of JCREN 2019

Assoc. Prof. Andi Erwin Eka Putra



We are pleased to welcome all participants of The 8th Joint Conference on Renewable Energy and Nanotechnology (JCREN 2019). This joint conference is held following the successful 1st JCREN in Bangkok, 2nd JCREN in Hiroshima, 3rd JCREN in Kanchanaburi, 4th JCREN in Matsuyama, 5th JCREN in Kuala Lumpur, 6th JCREN in Bangkok, and 7th JCREN in Yamaguchi. This year, The 8th JCREN 2019 is taking place in Makassar, Indonesia from 5th to 6th of November 2019 in the Engineering Campus of Hasanuddin University.

In line with Hasanuddin University's commitment to increase international academic cooperation, joint conference program such as JCREN is a top priority in improving international networks and research collaboration. Through international conferences, it is expected that researchers in the eastern part of Indonesia can interchange information so that it can add insight and maturity of scientific thinking. International conferences can also be a means to establish cooperation among field research, especially those from abroad.

We would like to convey our deepest gratitude to Prof. Yukihiro Matsumura, Prof. Shyam S. Pandey, and Prof. Tawatchai Charinpanitkul as Keynote Speakers and for their kind supports for the success of this joint conference. We would like to send our gratitude to all international and local Steering Committee for their valuable contribution to JCREN 2019.

We would like to express our gratitude to all participants and we would like all of you to enjoy your time here in Makassar. While participating in JCREN, we hope that you will expand your network, add friends and engage in the many productive discussions that will be held at this conference.

A handwritten signature in black ink, appearing to read 'Andi Erwin Eka Putra', written in a cursive style.

Words for the JCREN2019

JCREN2012-2014 Japanese Chair

JCREN2015-2019 Vice Chair

Yukihiko MATSUMURA



Since the first JCREN in Bangkok, we have been continuing this conference every year, and it is already 8th meeting. We can count it as second one in Higashi- Hiroshima, third one in Kanchanaburi, fourth one in Matsuyama, fifth one in Kuala Lumpur, and sixth one in Bangkok, and seventh one in Ube. The rotation is Thailand-Japan-other country since the 3rd conference. This meeting is thus the 2nd "other country" conference for JCREN, and it is in Indonesia.

The 4th conference in Matsuyama was where we decided to have this conference in Indonesia some day. Prof. Nomura, the chair of the conference was working with Indonesian researcher, who participated in it. In this way, we are extending our network from one country to another, inviting more and more participants. This is actually what we intended. Networking of researchers allows us to achieve more than what we can do independently.

It is also true for the research field. It is by association with other field that you get inspiration, and magic of synergy arises. Thus, we started to provide a stage for renewable energy researchers and nanotechnology researchers to co-act. Now it is not only these two fields, but also many other fields that is joining the performance. I hope this JCREN2019 can be a wonderful stage for you to enjoy association with researchers from other fields.

Finally, I would like to thank Dr. Andi Erwin Eka Putra, Universitas Hasanuddin, to be the chair of this conference and to invite all of us to this wonderful city of Makassar. The success of this conference really owes his efforts. My sincere thanks go to all the staffs in Universitas Hasanuddin who helped this conference organization and all the organizing committee members. If it were not for their kind help and cooperation, this conference could never be held. Hope you enjoy this conference, extend your network, and more and more collaboration come out.

A handwritten signature in black ink that reads "Y. Matsumura". The signature is written in a cursive style with a large, sweeping "Y" and "M".

Message for JCREN2019 from Thailand

Prof. Tawatchai Charinpanitkul



With the total population of more than 270 Million and consisting of more than 17,000 islands with over 1.9 million square miles of land, Indonesia is the 4th largest country with growing potential. Abundant unique natural resources and excellent human resource are strength of this great country. To serve the continuous growth of the country and the whole region, Indonesia has contributed a lot in developing and supplying energy, food, technology and many issues. Among those emerging issues, Renewable Energy and Nanotechnology have drawn attentions from multi-lateral collaboration among many stakeholders. With the dedication of Universitas Hasanuddin, it is a great opportunity that JCREN could be expanded to become a broader and energetic network among Indonesia, Japan, Malaysia, Philippines, Thailand, and other alliance countries. The 8th JCREN or JCREN2019 has been well organized in the beautiful campus of Department of Mechanical Engineering, Universitas Hasanuddin situated in Makassar, Sulawesi Island, which is the biggest city in the Eastern part of Indonesia. All arrangement of JCREN2019 has followed the same objective as that of the previous JCRENs, which has focused on providing academic and cultural exchange as well as fostering young generation for contributing to the whole society. As a result, continual and innovative topics covering Renewable Energy, Nanotechnology, Chemical Engineering, Environmental Engineering, Mechanical Engineering, and other relevant fields are emphasized to stimulate the intimate and friendly meeting among academia, researchers and industrial entrepreneurs. New opportunities in utilizing new knowledge and experiences would be shared and discussed in either oral or poster sessions in JCREN2019. Additionally, a technical excursion would also provide good opportunity for all participants to broaden their vision. With all mentioned aspects, I am confident that JCREN2019 would certainly remark some impressive memories for all.

I would like to take this opportunity to extend my sincere gratitude to all organizing committee members, especially, Prof. Andi Erwin E. Putra and all colleagues of Universitas Hasanuddin as well as all alliance institutions for their dedication to the successful JCREN2019. Certainly, many respectful supports from all industrial partners would also be acknowledged. Last but not least, I am confident that the success of JCREN2019 would help strengthen our multilateral collaboration in the field of Renewable Energy and Nanotechnology which would be beneficial to our global society.

(Prof. Tawatchai Charinpanitkul)
Associate Dean for Academic Affairs
Faculty of Engineering, CHULALONGKORN University, Thailand



List of Content

	Pages
Message from Chair of JCREN 2019, Assoc. Prof. Andi Erwin Eka Putra	i
Message for JCREN2019 from Thailand (Vice Chair Prof. Yukihiro MATSUMURA)	ii
Message for JCREN2019 from Thailand (Vice Chair Prof. Tawatchai Charinpanitkul)	iii
List of Content	iv
Keynote Speech I, Prof. Syam S. Pandey, Kyushu Institute of Technology, Japan	
Dye-Sensitized Solar Cells in the Realm of Future Energy Challenges: Materials Design & Device Engineering	v – vi
Keynote Speech II, Prof. Tawatchai Charinpanitkul, Chulalongkorn University, Thailand	
Synthesis of magnetic carbon nanomaterials and their applications in bio-circular economy	vii – xi
Keynote Speech III, Prof. Yukihiro Matsumura, Hiroshima University, Japan	
Biomass Utilization as Carbon Source for 2050	xii-xiii
Parallel Session	
<u>Reneawable Energy</u>	
<i>Ryoya Shiraishi, Shinfuku Nomura and Hiromichi Toyota</i>	1 – 4
RE 1. Comparison of hydrogen production through in-liquid plasma methods	
<i>Rahmat Iman Mainil and Yukihiro Matsumura</i>	5 – 8
RE 2. Effect of heating rate on supercritical water gasification of palm oil mill effluent	
<i>Kazuma Takata, Nao Umehara, Ken-Ichiro Tanoue, Morihisa Yokota and Toyooki Niki</i>	9 – 11
RE 3. Study on mass transfer of ash in combustion of bamboo powder	
<i>Puji Rahmawati Nurcahyani and Yukihiro Matsumura</i>	12 – 15
RE 4. Influence of nutrient concentration on phosphorus consumption and biomass productivity of microalgae <i>Chlorella vulgaris</i>	
<i>Tsuyoshi Komoto, Naoto Morishige and Ken-Ichiro Tanoue</i>	16 – 18
RE 5. Study on thermal and chemical reactions during major components of woody biomass	
<i>Hiroki Yokoyama and Yukihiro Matsumura</i>	19 – 20
RE 6. Nitrogen behavior in supercritical water gasification of glycine at the initial stage	
<i>Andi Erwin Eka Putra, Inong Oskar, Hairul Arsyad and Novriany Amaliyah</i>	21 – 26
RE 7. Characterization of Pyrolysis and Gasification Product of Cashew Nutshell Waste	
<i>Muh. Firdan Nurdin, Andi Erwin Eka Putra and Novriany Amaliyah</i>	27 – 42

RE 8. Plasma Treatment in-Water Processes of Sugarcane Bagasse	
<i>Andi Amijoyo Mochtar, Jalaluddin Hadda, Rafiuddin Syam and Amirullah Amirullah</i>	43 – 46
RE 9. Optimization of Methane Gas using Active Charcoal Purification, Plantain Banana Skin and Cows Waste in Biodigester	
<i>Pongsert Sriptom, Pornyamon Leephisuth, Arthit Neramittagapong and Sutasinee Neramittagapong</i>	47 – 50
RE 10. Optimization of lignin conversion by hydrothermal process for recovery of vanillin	
<i>Khairil Anwar, Syukri Himran, Luther Sule and Nasruddin Azis</i>	51 – 60
RE 11. Performance of Bach-type Savonius Wind Turbine with Modification of Straight Blade Angle	
<i>Jufri, Daeng Paroka, Jalaluddin and Rustan Tarakka</i>	61 – 68
RE 12. Simulation of Sea Wave Energy Absorption Based on Overview of Wave Height, Shape and Size of Buoyancy	
<i>Luther Sule, Andi Amijoyo Mochtar, Jalaluddin Hadda, Rafiuddin Syam and Aksan Eji</i>	69 – 72
RE 13. Axial Fan Performance using Variation of Number of Blades in Flow Direction	
<i>Abdul Muis and Muhammad Sadat Hamzah</i>	73 – 82
RE 14. Design and Development of Crossflow Turbine for Low Head Application	
<i>Mustofa, Basri, Hasan Basri, Jumiyatun, Irwan Mahmudi, Hariyanto, Zuryati Djafar and Wahyu H. Piarah</i>	83 – 91
RE 15. Low Sun Spectrum on Simulation of an Amorphous Silicon Photovoltaic and Thermoelectric Generator Hybrid	
<i>Azwar Hayat, Rafiuddin Syam, Ilham, and Yasser Ridha Muslim</i>	92 – 99
RE 16. Performance analysis of flexible solar panels on electric motorcycles with flat and curved mounting positions	
<i>Sallolo Suluh, Abd Rauf Musadat, Zuryati Djafar, Novriany Amaliyah, and Wahyu H. Piarah</i>	100-106
RE 17. The Performance of Biomass Briquette Stoves Made of Steel Plates with Aluminum Sheets Diameter Variations	
 <u>Nano Technology</u>	
<i>Riku Yamada, Shinobu Mukasa, Ryota Kikuchi, Koichiroh Sakai and Shinfuku Nomura</i>	107 – 110
NA 1. Sintering of Copper Nanoparticles Synthesized by Pulsed Discharge Method in Methanol	
<i>Mentia Farida, Ilham Alimuddin, Asri Jaya, Lily Fauzielly and Jimmi Nugraha</i>	111 – 117
NA 2. Identifying the Calcareous Nanofossils from Tonasa Limestone Karama Section Jeneponto Area South Sulawesi, Indonesia	

- Aishah Mahpudz, Siu Ling Lim, Hitoshi Inokawa, Katsuki Kusakabe and Ryuichi Tomoshige* 118 – 121
- NA 3. Cobalt nanocluster intercalated on layered double hydroxide (LDH): Control of cluster size and effect on its catalytic activity for sodium borohydride (NaBH₄) hydrolysis
Phanatchakorn Mala, Chosel Lawagon, Araya Smuthkochorn, Tawatchai Charinpanitkul and Sakhon Ratchahat 122 – 127
- NA 4. Effect of temperature to electroless nickel plating on multiwalled carbon nanotubes
Karina Irene Valeriano, Darlene Atienza, Dan Erson Talplacido, Rose Ann Tamolang, Tawatchai Charinpanitkul and Chosel Lawagon 128 – 133
- NA 5. Synthesis and characterization of multi-walled carbon nanotubes from turpentine oil using chemical vapor deposition with ferrocene
Lennard Felipe, Celine Joy Cruz, Joshua Aldave, Florencio De Los Reyes, Chosel Lawagon and Tawatchai Charinpanitkul 134 – 142
- NA 6. Synthesis and Characterization of Carbon Nanotubes Derived from Eucalyptus Oil for the Removal of Amoxicillin from Aqueous Solution

General and Innovative Technology

- Keitaro Fukumoto, Ryo Tanaka, Yuushou Nakayama, Takeshi Shiono, Norioki Kawasaki, Naoko Yamano and Atsuyoshi Nakayama* 143 – 146
- GI 1. Synthesis and properties of sequence-controlled copolyesters composed of glycolic acid, 1,4-butanediol and dicarboxylic acid
Kentaro Kawai, Ryoya Shiraishi, Shinfuku Nomura, Junichi Nakajima and Kei Kirihara 147 – 150
- GI 2. Characteristics of ultrafine bubbles in an alkaline aqueous solution
Kazuki Tange, Shinfuku Nomura and Junichi Nakajima 151 – 154
- GI 3. Methylene blue decomposition by various in-liquid plasma methods
Haobo Yuan, Ryo Tanaka, Yuushou Nakayama and Takeshi Shiono 155 – 158
- GI 4. Ring-opening polymerization of macrocyclic oligocarbonates with phosphazene superbase
Ramiro Emerson Amon, Christian Lawagon, Keenan Jake Segamata, France Joshua Barrientos, Ronnel Esparagoza, Esther Consuelo Tan and Chosel Lawagon 159 – 165
- GI 5. Preparation of graphene-based conductive ink from spent zinc-carbon batteries
Chosel Lawagon, Giang Le, Jamekorn Panichpol, Kantapong Arunaditya and Tawatchai Charinpanitkul 166 – 170
- GI 6. Preparation of sulfonated graphene oxide from petrochemical waste oil

<i>Francheska Therese Teñoso, Jennelle Andre Javier, Krizia Mharee Poja, Divine Angela Sumalinog and Jenyuk Lohwacharin</i>	171 – 181
GI 7. Utilization of coconut husk wastes as adsorbent material for the removal of Ibuprofen: Kinetic studies and mechanisms	
<i>Hairul Arsyad and Sudarsono</i>	182 – 188
GI 8. The Effect of Width Scaling on Flexural Behavior of CFRP Laminates	
<i>Yutaro Suzuki, Shuhei Inoue and Yukihiro Matsumura</i>	189 – 192
GI 9. Development of photoelectron yield spectrometer and measure electronic structure of photochromic materials	
<i>Kosuke Okamoto, Ryoya Shiraishi, Shinfuku Nomura, Hiromichi Toyota and Shota Shimokawa</i>	193 – 196
GI 10. One-step ammonia synthesis under by in-liquid plasma ordinary temperature and pressure	
<i>Takumi Harada, Yuushou Nakayama, Ryo Tanaka, Takeshi Shiono, Norioki Kawasaki, Naoko Yamano and Atsuyoshi Nakayama</i>	197 – 200
GI 11. Development of poly(butylene furanoate)-based cationic ionomers	
<i>Jumiyatun, Baso Mukhlis, Agustinus Kali, Ikhwal Syukur and Mustofa</i>	201 – 211
GI 12. Application of DCDC Boost Converter in the Utilization of Heat and Cold Temperatures Conversion Using Thermoelectric Generator and PID Controller	
<i>Lamya Zahir, Ryo Tanaka, Yuushou Nakayama and Takeshi Shiono</i>	212 – 215
GI 13. Synthesis of Thermoplastic Elastomers using 2-Methyl-1,3-propanediol, Succinic Acid and Lactide	
<i>Muh. Farid Hidayat, Ilyas Renreng and Fauzan Djamaluddin</i>	216 – 225
GI 14. Analysis of Crashworthiness and Optimization of Bi-Tubular Thin-walled Structures	
<i>Sutami Suparmin, Muhammad Zakir, Irwan Ridwan Rahim and Faizal Arya Samman</i>	226 – 230
GI 15. Comparative Experimental Power Measurements of Red Soil Battery with H ₂ SO ₄ , NaCl, and NaOH Additive Solutions	
<i>Misaki Honda, Yuto Yamasaki and Ken-Ichiro Tanoue</i>	231 – 234
GI 16. Influence of operation pressure on heat and mass transfer in SiO ₂ thin film coating by thermal CVD	
<i>Fauziah Hamzah, Muhammad Aldian Adiputra Latif, Faizal Arya Samman, Rafiuddin Syam, Rhiza S. Sadjad and Tino Suhaebri</i>	235 – 241
GI 17. Variable Frequency Pulse Control Algorithm for Electric Motor Controller used in Electric Vehicle Applications	
<i>Phetcharat Dhammayannarangsi, Chalida Nakalekha Limjeerajarus and Nuttapol Limjeerajarus</i>	242 – 246

GI 18. An FEA on a simplified 3D maxillary first premolar model suggested the commonly used modulus of elasticity values of the periodontal ligament may be incorrect.	
<i>Shuhei Inoue, Kento Tobinaga and Yukihiko Matsumura</i>	247 – 249
GI 19. Evaluation of yellow phosphors synthesized by sol-gel method	
<i>Novriany Amaliyah, Azwar Hayat and M. Alif Prasetyo, Andi Erwik E. Putra, and Machmud Syam</i>	250 – 258
GI 20. Semiconductor TiO ₂ Coating deposited by Microwave Plasma Method	
<i>Zulkifli Djafar, Ilhamzah Ilhamzah and Ilyas Renreng</i>	259 – 266
GI 21. The Effect of Seawater Immersion in Ramie Fiber Composites on Impact Strength	
<i>Ham Hamsir, Onny Sutresman, Muhammad Syahid and Hairul Arsyad</i>	267 – 273
GI 22. Effect of Salinity and Temperature on Corrosion Rate of ST 41 and SS 304 Steels in the Seawater Environment	
<i>Ratih Sholihah, Irwan Mahmudi, Yulius Pirade, Sari Dewi, Sitti Nurada, Asti Dian and Mustofa</i>	274 – 282
GI 23. Optimization of Distributed Generation Placement for Voltage Drop Minimization in PALAPAS's Radial Distribution System Using Genetic Algorithm	
<i>Rustan Tarakka, Jalaluddin, and Wawan Rauf</i>	283 – 291
GI 24. Computational Analysis of The Application of Active Control on Vehicle Model with Varied Suction Velocities	
<i>Viktus Kolo Koten, Syukri Himran, Nasaruddin Salam, and Luther Sule</i>	292 – 303
GI 25. Modified Blade Pitch Angle on the Changes Darrieus Turbine Tangential Speed	

JCREN 2019 FULL PAPER

Organized by:



Sponsored by:



Plasma Treatment in-Water Processes of Sugarcane Bagasse

Muh. Firdan Nurdin^{1*}, Novrianty Amaliah¹, Andi Erwin Eka Putra¹

¹ Department of Mechanical Engineering, Hasanuddin University

* Corresponding author: firdanfino@gmail.com

Abstract

Sugarcane (*Saccharum officinarum* L.) is an indispensable plant, representing most of the cultivated plants throughout the world. Sugarcane is processed to produce crystalline sugar and bioethanol. The treatment process produces sugarcane bagasse waste. Sugarcane bagasse waste can be utilized through some treatment. In this study, Plasma Treatment (PT) in-Water treatment was applied to sugarcane bagasse to investigate the glucose concentrates and by-products. PT in-water energy input parameters were 320, 340, and 400 W with an irradiation time of 1, 2.5 and 5 minutes. Sugarcane bagasse after treatment and by-products were tested using the Nelson Somogyi method to determine glucose percentage and characterized using Fourier Transform Infrared Spectroscopy (FT-IR), Scanning Electron Microscope (SEM) and Image-J software. The results showed that the percentage of glucose in sugarcane bagasse decreased from 0.028% to 0.00023% at 400 W energy input, the irradiation time of 5 minutes. The by-product resulted in cellulose nanoparticles which had an average diameter from 276.14 to 105.78 nm at each energy input variation.

1. Introduction

Sugarcane (*Saccharum officinarum* L.) is an indispensable crop, representing a significant proportion of cultivated crops worldwide. Its annual global production of ~1.6 billion tons generates several hundred million metric tons of bagasse or remaining fiber after the extraction of the sugar-bearing juice[1]. Bagasse is composed of up to 70% holocellulose, which is represented by high tensile strength crystalline cellulose with intervening amorphous regions gathered into bundles of microfibrils embedded in an amorphous matrix of hemicellulose and further crosslinked lignin. Small amounts of

pectin, extractives, and ashes also are included in the biomass composition[2]. United Nations data estimates up to 493 million metric tons of bagasse generates globally from the sugar industry [3]. Sugarcane bagasse contains cellulose around 39.5% - 45.7%, hemicellulose around 25.6% - 29.6%, lignin around 2.3% - 10.5%, minerals around 2.3% - 10.5% and ash around 1.1% - 6% [4]. Cellulose is composed of $\beta(1-4)$ diequatorially linked D-glucose molecules that associate through strong hydrogen bonding and pack together in a hierarchical fashion. Within the plant cell wall, other polysaccharides are associated with cellulose, such as hemicelluloses, pectin, and lignin[5]. For sugarcane bagasse, there is a pre-treatment process using alkaline solutions such as NaOH or H₂SO₄ to the breakdown of the cellulose network in bagasse[6].

Plasma processing has inherent advantages in the production of advanced materials such as the wide field of nanomaterials. At high temperatures chemically reactive species formed in the plasma through the vapor phase, the reaction may accelerate chemical reactions for the production of nanoparticles[7]. Plasma technology methods were implemented to produce nanomaterials such as nano-diamond, nanocarbon and nanoparticles[8]–[10]. Nanometer or micrometer-sized particles can be formed by plasma technology. Plasma is normal electron-ion with an additional highly charged component of massive particulates and/or dust grains[11].

The high efficiency of plasma is a result of its high temperature and presence of reactive species such as electrons, ions, radicals, etc that enhance chemical reactions[12]. The radicals have an important role in the deconstruction of a biomass lignocellulosic matrix, particularly degrading the lignin with good efficiency[13]. In contrary to most plasma methods, plasma microwaves can use a magnetron similar to that used in other industrial applications, e.g. drying or food processing. They are relatively cheap and have a simple and compact construction similar to the domestic microwave oven[14]. Plasma technology-assisted chemical pretreatments were implemented to increase sugar content in sugarcane bagasse[15].

The technology treatment for sugarcane bagasse currently still requires several chemical methods. Therefore, the purpose of this research is to investigate the *Plasma Treatment in-Water Processes of Sugarcane Bagasse*.

2. Material and Methods

2.1. Material

The sugarcane bagasse was obtained from PT. Takalar Sugar Factory. Sugarcane bagasse was cleaned and dried by sun for 3 days until a low humidity level. Then it

was sifted by 10, 20 and 45 mesh to obtain the uniform size range is 3 – 5 mm. The sugarcane bagasse sample is shown in figure 1.



Fig. 1. Sugarcane Bagasse

2.2. Treatment Process

2.2.1. Plasma Treatment In-Water

In PT in-Water method, Sample was prepared at 10 % w/v weight of the sugarcane bagasse to the volume of distilled water. The sample was put into the reactor by adding distilled water. It was treated by microwave plasma with a variation of time in 1 minute, 2.5 minutes, 5 minutes and energy input at 320, 360 and 400 W. The percentage glucose of the sample was tested using the Nelson Somogyi method. Characterization by-product was conducted using FTIR and SEM. The Schematic Apparatus of PT in-Water has shown in figure 2.

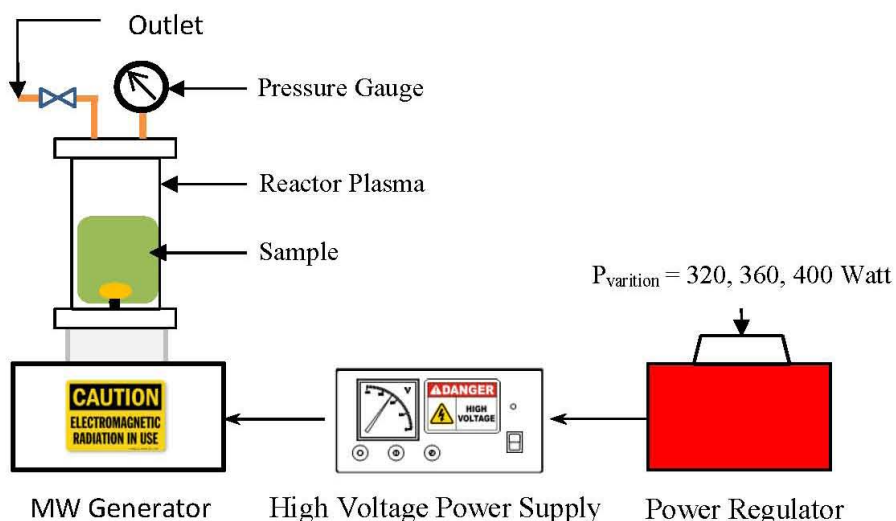


Fig. 2. The Schematic Apparatus of PT in-Water

2.2.2. Nelson Somogyi Method


In this method, Nelson's reagent is used to determine glucose content and then determine the glucose concentration by spectrophotometry. The Nelson reagent is a combination of Nelson A reagents and Nelson B reagents with a volume ratio of 25 : 1 (ml). The color of Nelson's reagent is blue. Reducing sugar (glucose) will reduce oxidizing compounds ($\text{CuSO}_4 \cdot 5\text{H}_2\text{O}$) to red brick deposits (Cu_2O). After adding the Nelson reagent, the sample was warmed up so that it will show the presence of deposits on the bottom of the test tube which is assumed to be the Cu_2O brick-red precipitate in the sample which has a high reducing sugar concentration. In absorption measurement, the wavelength of 540 nm is the maximum wavelength of glucose.

2.2.3. Product Characterization

Scanning electron microscope (SEM) (TM-3000, Hitachi) at 15 kV (voltage acceleration) was used to study the morphology of sugarcane pulp by-products after plasma treatment. Furthermore, the chemical structures of the by-product of sugarcane bagasse were identified by the peak of FTIR characteristics (IRPrestige-21 SHIMADZU). Result and Discussion.

3. Result



The percentage of glucose in sugarcane bagasse before treatment is 0.028%. After treatment by using PT in-Water, the percentage of glucose in sugarcane bagasse was decreased. It was influenced by input power and time treatment of the PT in-Water. The result is shown in figure 3.

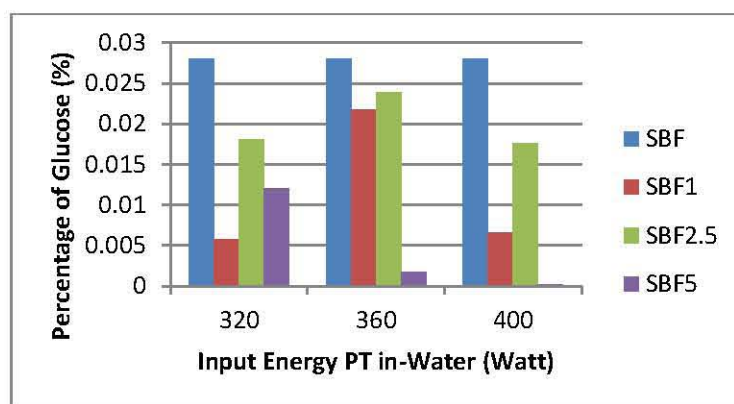

SBF = Sugarcane Bagasse Fiber 1, 2.5, 5 = Variation of treatment time (Min)

Fig. 3. The percentage of glucose to the variation of input energy PT in-Water of each sample.

Decreased glucose levels in the PT in-water process can be influenced by the characteristics of the plasma. Plasma has a very high electron temperature around $10^3 \sim 10^4$ K so that it is able to produce active species [16], [17]. Active species produced by plasma technology in various liquid phases or Solution Plasma Process (SPP) namely H_2O_2 , O , OH^\bullet , H_α , H_β , O^* , HO_2 , O_3^* , N_2^* , e^- , O_2^- , O^- , O_2^+ , e^{-*} , H^* which can play a role in the process of decomposition of organic compounds [17]–[19]. S.Nomura, et al have reported that the highest intensity of active species produced during the microwave plasma process is OH^\bullet [19]. Baroch, et al have also reported that the production of hydroxyl radicals can occur in the process of in-water plasma treatment through the reaction of radical oxygen with water in the system [15]. The mechanism of active hydroxyl radical formation (equation 4 - 7) [18].



The one of active species is the active hydroxyl radical (OH^\bullet) which can effectively abstract cellulose and hydrogen bonds [20], [21]. OH^\bullet can extract O-H and C-O bonds in glucose through the transfer of hydrogen OH^\bullet to glucose oxygen atoms. This results in the opening of the glucose pyran ring (figure 3) [22]. Therefore, the reduction in glucose levels in sugarcane bagasse after plasma treatment is assumed to be due to the abstraction of hydrogen glucose by active hydroxyl radicals (OH^\bullet). High reaction temperatures can also accelerate glucose degradation [23].

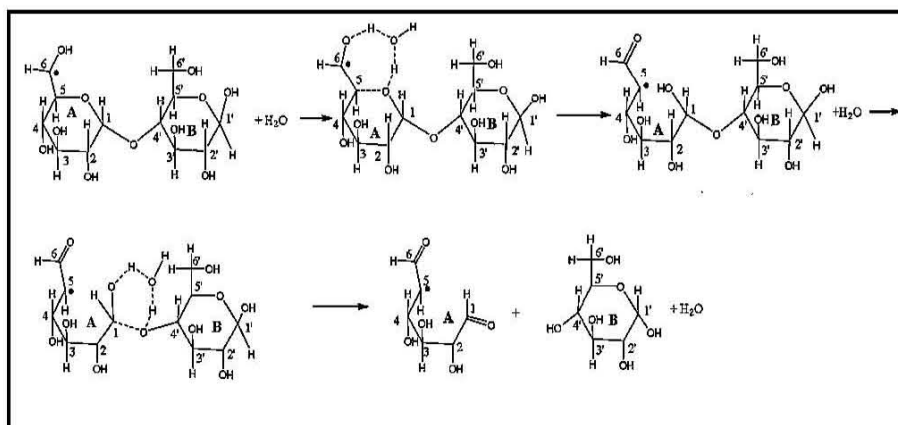


Fig. 3. Opening of the Pyreanean Glucose Ring in the Glucosidic Bond [22].

The distillation water after treatment was tested for glucose content using the nelson Somogyi method (Table 1).

Tabel 1. Measured Glucose in Distilled Water

No.	Sample	Energy Input PT in-Water (W)	Measured Glucose (mg/mL)
			After Treatment
1	DW1	320	0,00055
2	DW2.5	360	0,00134
3	DW5	400	0,001217

DW = Distillated Water 1, 2.5, 5 = Irradiation Time (min)

The table 1 showed measured variations in glucose content in distilled water. The highest measured glucose is at an energy input condition of 400 W and an irradiation time of 5 minutes. It can be assumed that the glucose dissolved in distilled water during the treatment process is due to the active species. One such active species is the hydroxyl radical (OH^*) which is effectively able to break hydrogen bonds and cellulose structure [20], [21]. Hydroxyl radicals can react with glycosidic bonds to experience the reaction of cutting the polysaccharide chain into glucose monosaccharides (figure 4) [15], [24], [25].

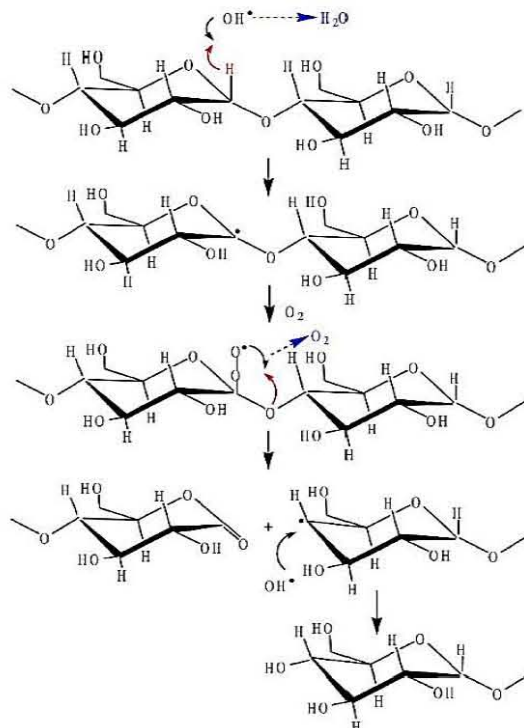


Fig. 4. Scheme Degradation of Glycosidic bond by oxygen radical species (OH^*) [25].

Hydroxyl radicals can separate hydrogen atoms in C-1 carbon that form glycosidic bonds into water molecules (H_2O). Subsequently, carbon radicals are formed and react

with oxygen through an oxidation process to form superoxide anions. This results in a cut between α -1.4 glycosidic sugarcane bagasse molecules. Then, carbonyl groups are formed and C-4 carbon radicals react with hydroxyl radicals to produce glucose [25]. The glucose produced will dissolve into water.

The solid materials of by-product were obtained from the dried process of the liquid product was analyzed using FTIR SHIMADZU to identify the functional groups of a compound.

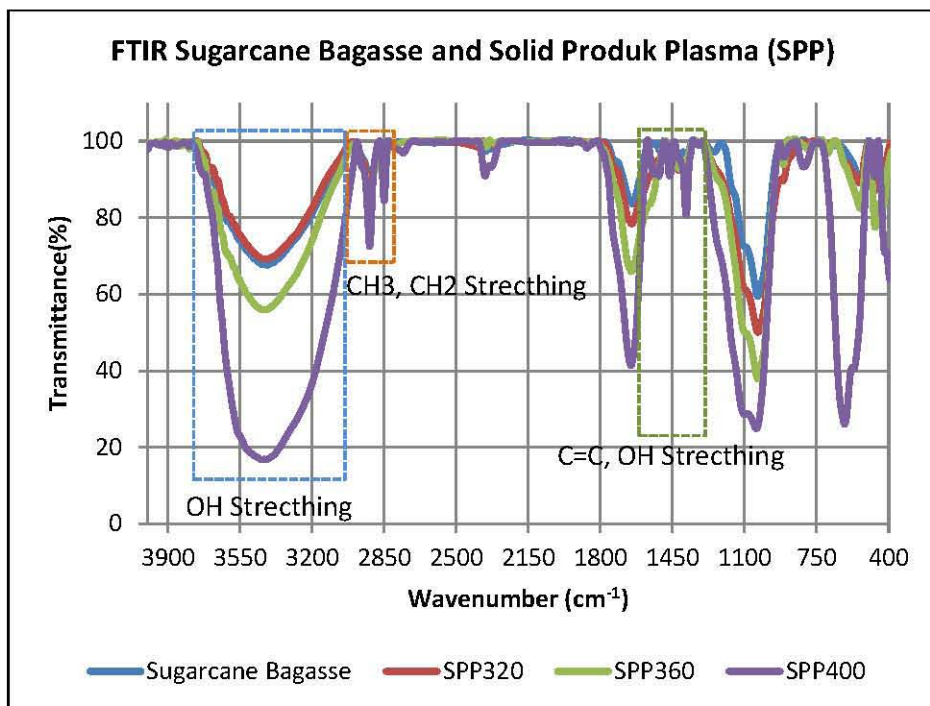


Fig. 5. FTIR of Sugarcane Bagasse and Solid Product Plasma

Figure 5 shows the results of sugarcane bagasse raw material testing before testing Raw Materials (Blue Line) of by-products (Solid Plasma Products / SPP) after assistance with variations in energy input 320, 360, and 400 Watt (SPP320, SPP360, SPP400).

At SPP320 (Red Line), SPP360 (Green Line), and SPP400 (Purple Line) have peaks 3437.15, 3437.15 and 3444.87 cm⁻¹, each of which is identified as a functional O – H stretching group. In cellulose, vibrations of intramolecular hydrogen bonds appear around 3432 cm⁻¹ to 3400 cm⁻¹ [26], [27]. The SPP320, SPP360, and SPP400 have peaks of 2920.23 cm⁻¹ and 2850.79 cm⁻¹, which are identified as asymmetric and symmetrical methyl and methylene functional groups. Peaks around 2920 cm⁻¹ and 2850 cm⁻¹ are related to the asymmetric and symmetrical methyl and methylene groups found in the spectrum of all-fiber components, especially in the cellulose spectrum [27]. The sugarcane

bagasse has a peak of 1730.15 cm^{-1} which is indicated to be a region of the $C = C$ group of lignin and hemicellulose vibrations, but SPP320, SPP360, and SPP400 are not found peaks in that area [28], [29]. SPP320, SPP360, and SPP400 have peaks, 1647.21 , 1643.45 , and 1653.00 cm^{-1} , which are $C = C$ (Alkene) functional groups identified as deformation or stretching vibrations of the cellulose O-H cellulose group, respectively [30]. In the functional group $C = C$ (Alkene) is also identified as an aromatic region of lignin. In the fingerprint area, peaks in raw materials, SPP 360, SPP 400 namely 1512.19 , 1558.48 and 1541.12 cm^{-1} are indications of $C = C$, $C - O$ stretching or bending vibrations of various groups contained in lignin [27], [31]. SPP360 and SPP400 have peaks of 873.75 , and 812.03 cm^{-1} which are indicated to amorphous regions in cellulose [32]. From the results of FTIR analysis on solid plasma products, there are no hemicellulosic bonds but lignin bonds are still present.

Table 2. The Peaks of FTIR of Lignocellulose Biomass [29].

Wavenumbers (cm^{-1})	Chemical groups and vibration modes
3300	ν ($O - H$) in hydroxyl groups (lignin and cellulose)
2880	ν ($C - H$) in methyl and methylene groups (cellulose)
1725	ν ($C = O$) in lignin and hemicellulose
1610 – 1595	ν ($C = C$) of aromatic ring (lignin)
1470	$\delta_a(\text{CH}_3)$ in lignin
1360	$\delta(O - H)$ in Cellulosa
1230	ν ($C - O - C$) in phenol-ether bonds of lignin
1160	ν ($C = O$) in aliphatic groups
1030	$C - O$ deforming in secondary alcohol and aliphatic ether

ν : stretching, δ : bending, a : asymmetric mode

SEM testing was conducted to determine the morphology of solid product plasma and using *free-software* Imag-J for obtained the average diameter of particles. However, in the analysis of the particles, it has limited analysis according to the smallest scale of the image. The smallest scale size determines the accuracy of the analysis so that it can influence the results of the analysis. The accuracy of particle analysis using Image-J compared with particle measurements with *Particle Size Analyzer* (PSA) is quite good with an average accuracy rate of 88% in the sample. This shows that particle analysis using Image-J is accurate enough to be applied to the results of SEM imaging [33].

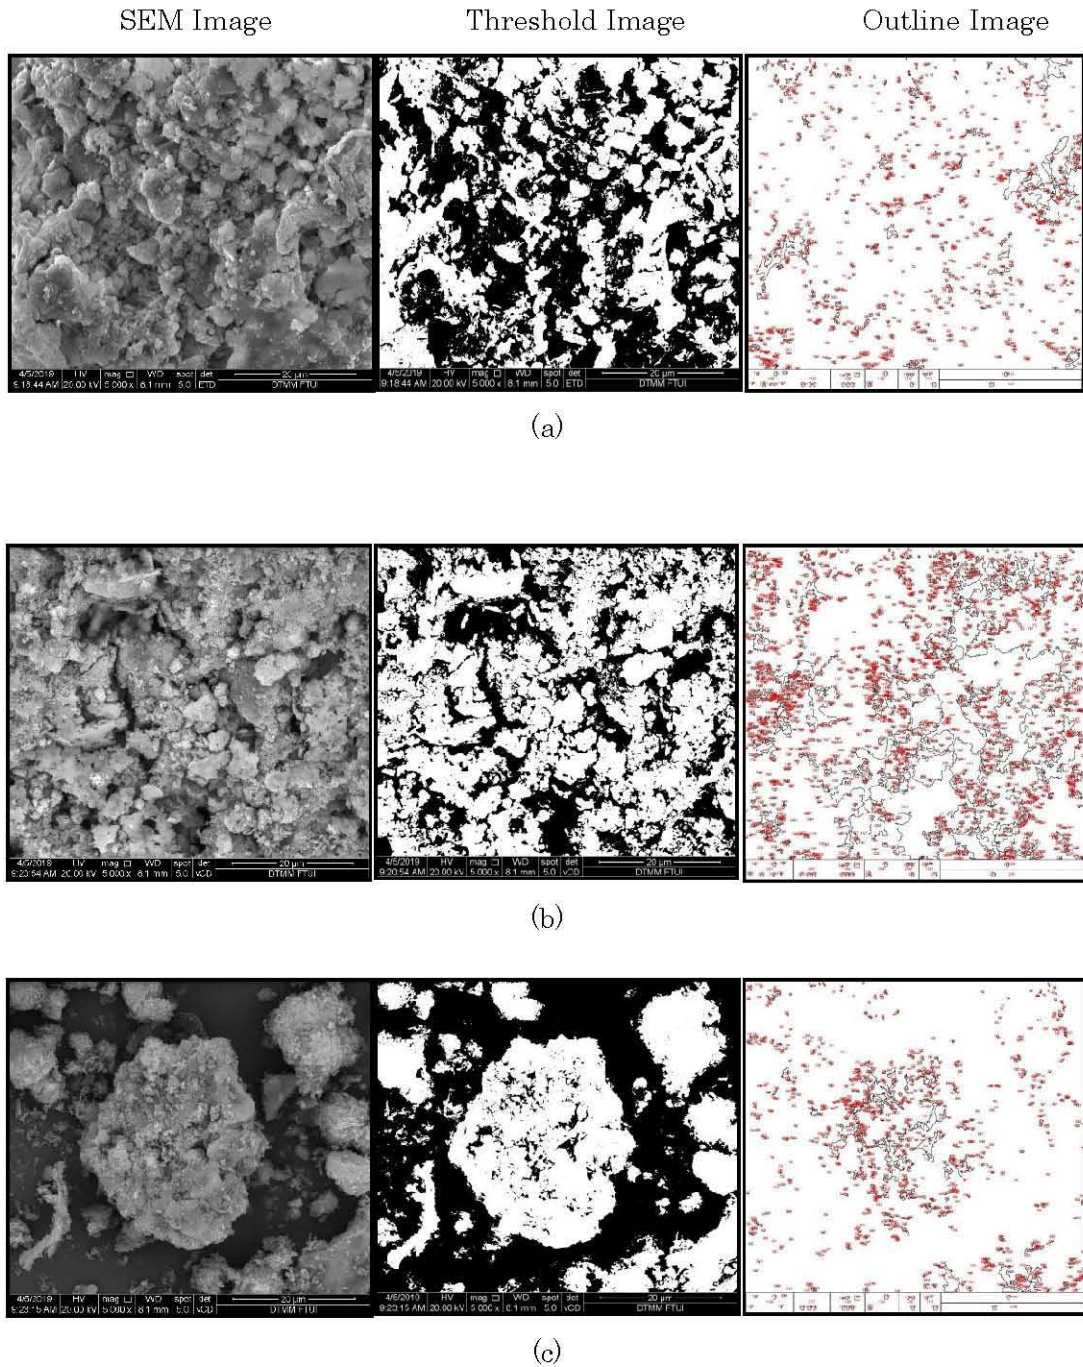



Fig. 6. SEM Testing Results at Magnification 5000x (a) SM320, (b) SM360, (c) SM400

Figure 6 shows the results of SEM testing for by-products (Solid Material). The image shows the results of the magnification 5000x with reference size is equal to 20 μm. By using ImageJ, the average area and the average diameter of the solid material were obtained. It showed in Table 3.


Table 3. The results of the particle size calculation of the average sample with the magnification 5000x

No.	Samples	The Average Area (nm ²)	The Average Diameter (nm)
1	SM320	257753.23	286.51
2	SM360	346701.50	332.29
3	SM400	239438.93	276.14


The average diameter of each sample meets the criteria of nanomaterial size namely nano-cellulose. The average diameter SM320, SM360, and SM400 were 286.51, 332.29, 276,14 nm, respectively.

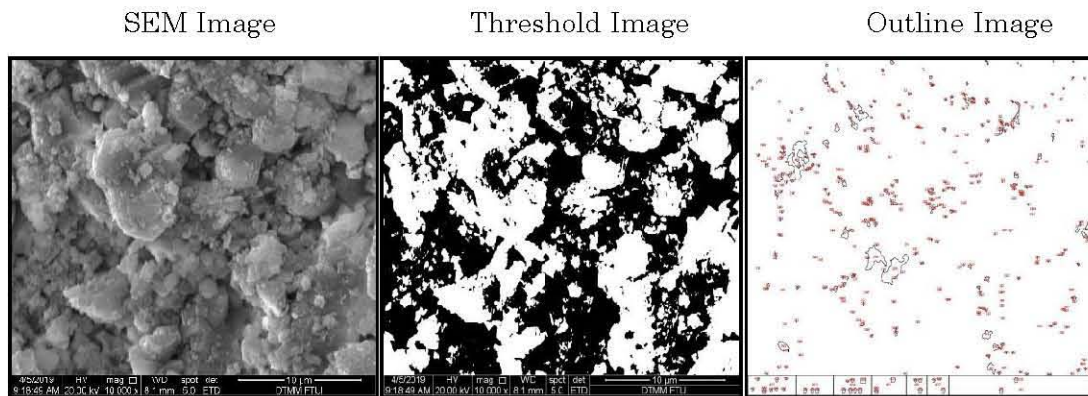

(a)

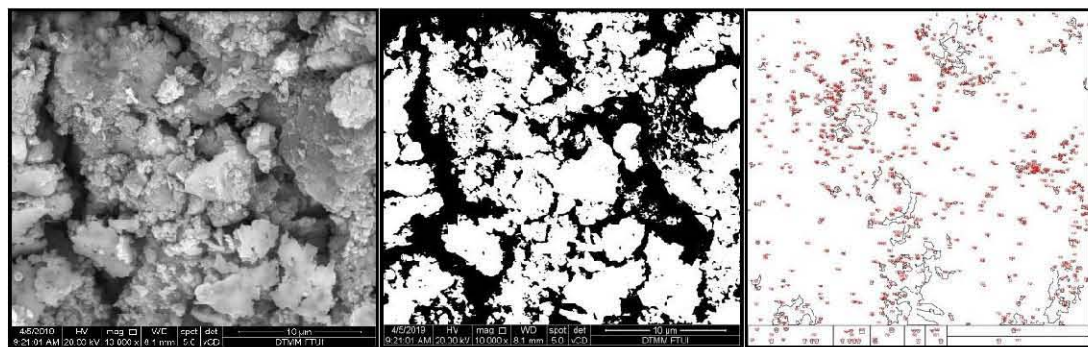

(b)

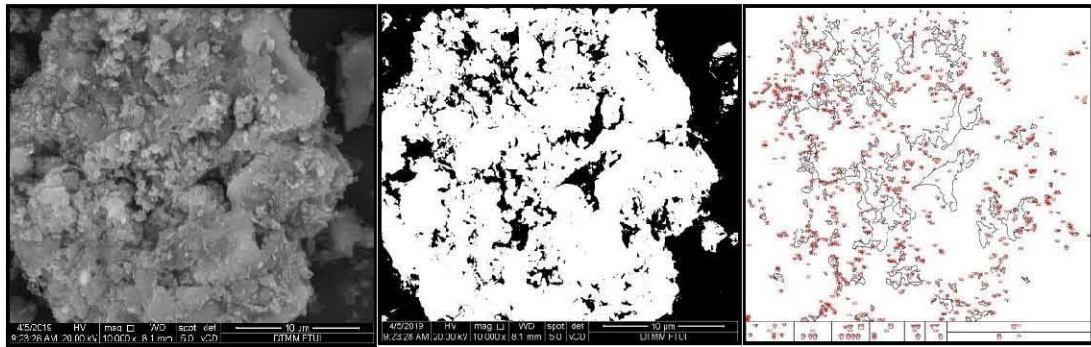

(c)


Fig. 7. SEM Testing Results at Magnification 10000x (a) SM320, (b) SM360, (c) SM400

Figure 7, shows the results of SEM testing for by-products (Solid Material). The image shows the results of the magnification 10000x with reference size is equal to 10 μm . By using ImageJ, the average area and the average diameter of the solid material were obtained. It showed in Table 4.

Table 4. The results of the particle size calculation of the average sample with the magnification 10000x

No.	Samples	The Average Area (nm ²)	The Average Diameter (nm)
1	SM320	130607.13	203.95
2	SM360	103366.58	181.44
3	SM400	133538.71	206.22

The average diameter of each sample meets the criteria of nanomaterial size, namely nano-cellulose. The average diameter SPP320, SPP360, and SPP400 were 203.95, 181.44, 206.22 nm, respectively.

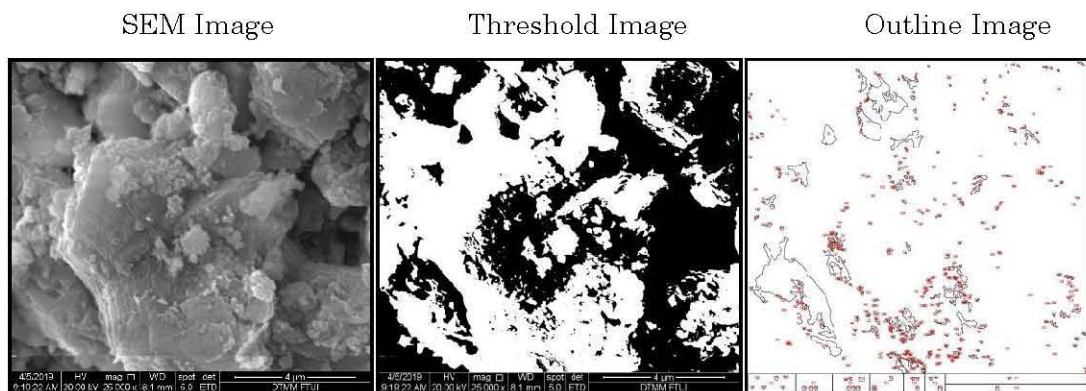

(a)

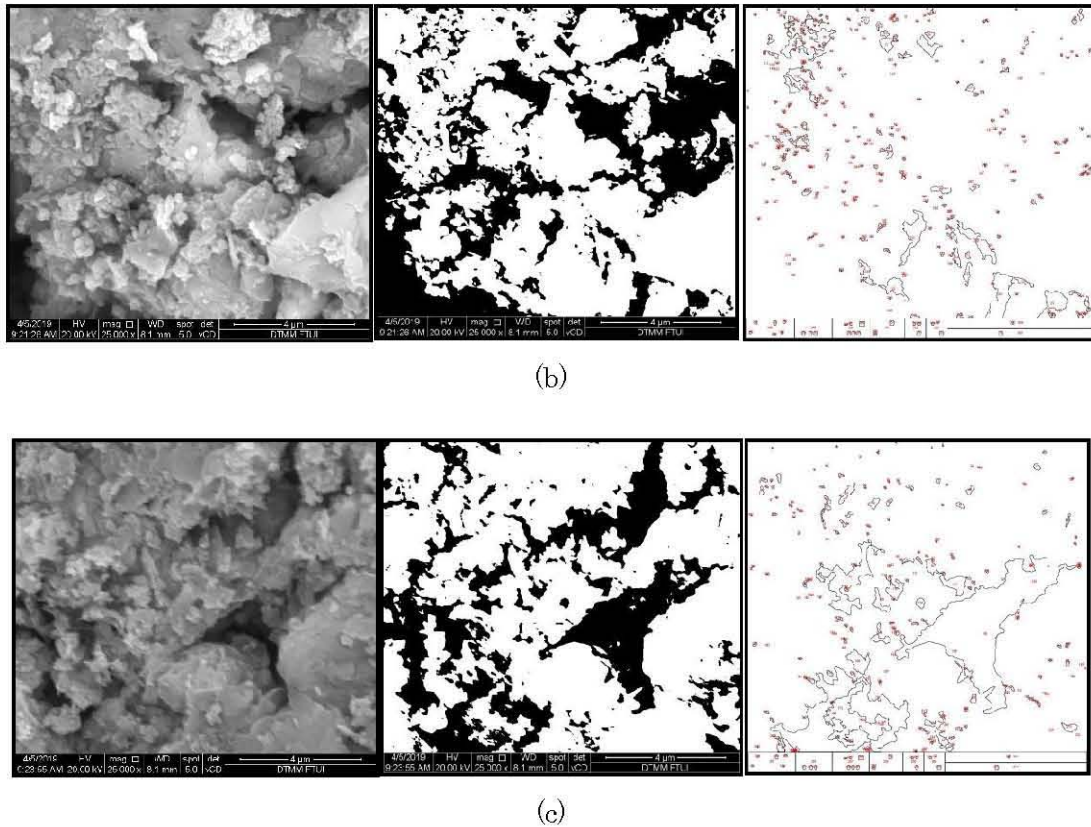


Fig. 8. SEM Testing Results at Magnification 25000x (a) SPP320, (b) SPP360, (c) SPP400

Figure 8 has shown the results of SEM testing for by-products (Solid Material). The image shows the results of the magnification 25000x with reference size is equal to 4 μm. By using ImageJ, the average area and the average diameter of the solid material were obtained. It showed in Table 5.

Table 5. The results of the particle size calculation of the average sample with the magnification 25000x

No.	Samples	The Average Area (nm ²)	The Average Diameter (nm)
1	SPP320	26714.46	92.24
2	SPP360	35132.82	105.78
3	SPP400	89546.48	168.87

The average diameter of each sample meets the criteria of nanomaterial size, namely nano-cellulose. The average diameter SPP320, SPP360, and SPP400 were 92.24, 105.78, 168.87 nm, respectively.

The average particle diameter of SM320, SM360, and SM400 has obtained in the range between 92.24 to 332.29 nm. Cellulose nanoparticles (CNP) of average particle

diameter ranging from 70 to 365 nm were obtained from cotton through optimizing the synthesis conditions such as the ratio of solvent/nonsolvent, concentrations of the cellulose, and the use of water-in-oil (w/o) microemulsion [34]. Therefore, the solid material (SM320, SM360, and SM400) are CNP.

Cellulose Nanoparticles are having various commercial and biomedical applications. In the agricultural industry, it is mainly used for seed treatment and as a biopesticide in order to fight fungal infections in plants. In winemaking, it can be used as a fining agent and also help to prevent spoilage. In medicine, it is useful as an antibacterial agent, and also assists in the delivery of drugs through the skin [35].

4. Conclusion

The results of this research show that microwave pyrolysis technology is more effective in increasing glucose levels in sugarcane bagasse than Plasma Technology in-Water (PT in-Water). However, the PT in-Water in the treatment of sugarcane bagasse was produced side product in the form of solid materials and was identified using FTIR and SEM as cellulose nanoparticles (CNP).

Reference

- [1] R. Hatfield and R. S. Fukushima, "Can Lignin Be Accurately Measured?," pp. 832–839, 2005.
- [2] S. M. R. Khattab and T. Watanabe, *Policía Nacional Revolucionaria Objetivos del Curso – taller*. Elsevier Inc., 2019.
- [3] "UN Energy Statistics Database, 2013." [Online]. Available: <https://unstats.un.org/unsd/energy/edbase.htm>.
- [4] K. Saha, A. Maharana, J. Sikder, S. Chakraborty, S. Curcio, and E. Drioli, "Continuous production of bioethanol from sugarcane bagasse and downstream purification using membrane integrated bioreactor," *Catalysis Today*, Elsevier B.V., 2018.
- [5] L. J. Gibson, "The hierarchical structure and mechanics of plant materials," no. August, pp. 2749–2766, 2012.
- [6] G. J. de M. Rocha, V. M. Nascimento, A. R. Gonçalves, V. F. N. Silva, and C. Martín, "Influence of mixed sugarcane bagasse samples evaluated by elemental and physical-chemical composition," *Ind. Crops Prod.*, vol. 64, pp. 52–58, 2015.
- [7] S. Samal, "Thermal plasma technology: The prospective future in material processing," *Journal of Cleaner Production*, vol. 142. Elsevier Ltd, pp. 3131–3150, 2017.
- [8] C. H. Nee, M. C. Lee, H. S. Poh, S. L. Yap, T. Y. Tou, and S. S. Yap, "Plasma synthesis of nanodiamonds in ethanol," *Compos. Part B Eng.*, vol. 162, pp. 162–166, 2019.
- [9] D. Mariotti, J. Patel, V. Švrček, and P. Maguire, "Plasma-liquid interactions at atmospheric pressure for nanomaterials synthesis and surface engineering," *Plasma Process. Polym.*, vol. 9, no. 11–12, pp. 1074–1085, 2012.
- [10] X. Tu and J. C. Whitehead, "Plasma dry reforming of methane in an atmospheric pressure AC gliding arc discharge: Co-generation of syngas and carbon nanomaterials," *Int. J. Hydrogen Energy*, vol. 39, no. 18, pp. 9658–9669, 2014.
- [11] T. Vacková, P. Špatenka, and S. Balakrishna, "Plasma Treatment of Powders and Fibers," in *Non-Thermal Plasma Technology for Polymeric Materials*, 2019, pp. 193–210.
- [12] P. Jamróz, W. Kordylewski, and M. Wnukowski, "Microwave plasma application in decomposition and steam reforming of model tar compounds," *Fuel Process. Technol.*, vol. 169, no. July 2017, pp. 1–14, 2018.
- [13] M. T. B. Pimenta *et al.*, "Hydrothermal and Atmospheric Pressure Microplasma Pretreatment Processes of Sugarcane Bagasse," no. FEBRUARY, pp. 1–9, 2010.
- [14] G. J. Van Rooij, D. C. M. Van Den Bekerom, N. Den Harder, and T. Minea, "Taming microwave plasma to beat thermodynamics in CO₂ dissociation," *Faraday Discuss.*, vol. 00, pp. 1–16, 2015.
- [15] I. Prasertsung, P. Chutinate, A. Watthanaphanit, N. Saito, and S. Damrongsakkul, "Conversion of cellulose into reducing sugar by solution plasma process (SPP),"

- Carbohydr. Polym.*, vol. 172, pp. 230–236, 2017.
- [16] X. Chen, Y. Cheng, T. Li, and Y. Cheng, “Characteristics and applications of plasma-assisted chemical processes and reactors,” *Current Opinion in Chemical Engineering*, vol. 17, Elsevier Ltd, pp. 68–77, 2017.
- [17] P. Baroch, V. Anita, N. Saito, and O. Takai, “Bipolar pulsed electrical discharge for the decomposition of organic compounds in water,” vol. 66, pp. 294–299, 2008.
- [18] S. Horikoshi and N. Serpone, “In-liquid plasma: A novel tool in the fabrication of nanomaterials and in the treatment of wastewaters,” *RSC Adv.*, vol. 7, no. 75, pp. 47196–47218, 2017.
- [19] S. Nomura *et al.*, “Discharge characteristics of microwave and high-frequency in-liquid plasma in water,” *Appl. Phys. Express*, vol. 1, no. 4, pp. 0460021–0460023, 2008.
- [20] O. Takai, “Solution plasma processing (SPP),” *Pure Appl. Chem.*, vol. 80, no. 9, pp. 2003–2011, 2008.
- [21] L. Gao *et al.*, “Hydroxyl radical-aided thermal pretreatment of algal biomass for enhanced biodegradability,” *Biotechnol. Biofuels*, vol. 8, no. 1, pp. 1–11, 2015.
- [22] Y. Dai *et al.*, “The mechanism for cleavage of three typical glucosidic bonds induced by hydroxyl free radical,” *Carbohydr. Polym.*, vol. 178, no. 29, pp. 34–40, 2017.
- [23] Y. Xiong, Z. Zhang, X. Wang, B. Liu, and J. Lin, “Hydrolysis of cellulose in ionic liquids catalyzed by a magnetically-recoverable solid acid catalyst,” *Chem. Eng. J.*, vol. 235, pp. 349–355, 2014.
- [24] J. Duan and D. L. Kasper, “Oxidative depolymerization of polysaccharides by reactive oxygen/nitrogen species,” *Glycobiology*, vol. 21, no. 4, pp. 401–409, 2011.
- [25] I. Prasertsung, K. Aroonraj, K. Kamwilaisak, N. Saito, and S. Damrongsakkul, “Production of reducing sugar from cassava starch waste (CSW) using solution plasma process (SPP),” *Carbohydr. Polym.*, vol. 205, no. July 2018, pp. 472–479, 2019.
- [26] M. Poletto, H. L. Ornaghi Júnior, and A. J. Zattera, “Native cellulose: Structure, characterization and thermal properties,” *Materials (Basel)*, vol. 7, no. 9, pp. 6105–6119, 2014.
- [27] M. Poletto, A. J. Zattera, and R. M. C. Santana, “Structural Differences Between Wood Species: Evidence from Chemical Composition, FTIR Spectroscopy, and Thermogravimetric Analysis,” 2012.
- [28] K. Plermjai, K. Boonyarattanakalin, W. Mekprasart, S. Pavasupree, W. Phoohinkong, and W. Pecharapa, “Extraction and characterization of nanocellulose from sugarcane bagasse by ball-milling-assisted acid hydrolysis,” in *AIP Conference Proceedings*, 2018, vol. 2010.
- [29] M. Bigan and B. Mutel, “Cold remote plasma modification of wood: Optimization process using experimental design,” *Appl. Surf. Sci.*, vol. 453, pp. 423–435, 2018.
- [30] H. Kargarzadeh, I. Ahmad, I. Abdullah, A. Dufresne, S. Y. Zainudin, and R. M. Sheltami, “Effects of hydrolysis conditions on the morphology, crystallinity, and thermal stability of cellulose nanocrystals extracted from kenaf bast fibers,” *Cellulose*, vol. 19, no. 3, pp. 855–866, 2012.

- [31] C. M. Popescu, G. Singurel, M. C. Popescu, C. Vasile, D. S. Argyropoulos, and S. Willför, "Vibrational spectroscopy and X-ray diffraction methods to establish the differences between hardwood and softwood," *Carbohydr. Polym.*, vol. 77, no. 4, pp. 851–857, 2009.
- [32] M. Åkerholm, B. Hinterstoisser, and L. Salmén, "Characterization of the crystalline structure of cellulose using static and dynamic FT-IR spectroscopy," *Carbohydr. Res.*, vol. 339, no. 3, pp. 569–578, 2004.
- [33] C. Kurniawan, T. B. Waluyo, and Perdamean Sebayang, "Analisis ukuran partikel menggunakan free software Image-J, Serpong.," *Semin. Nas. Fis.*, no. 12-13 Juli 2011, pp. 1–9, 2011.
- [34] S. F. Chin, F. B. Jimmy, and S. C. Pang, "Size controlled fabrication of cellulose nanoparticles for drug delivery applications," *J. Drug Deliv. Sci. Technol.*, vol. 43, pp. 262–266, 2018.
- [35] Y. Habibi, L. A. Lucia, and O. J. Rojas, "Cellulose Nanocrystals: Chemistry, Self-Assembly, and Applications," *Chem. Rev.*, vol. 110, no. 6, pp. 3479–3500, 2010.