


ISSN: 2085-014X

# *Indonesia Chimica Acta*

Vol. 9, No. 1, June 2016

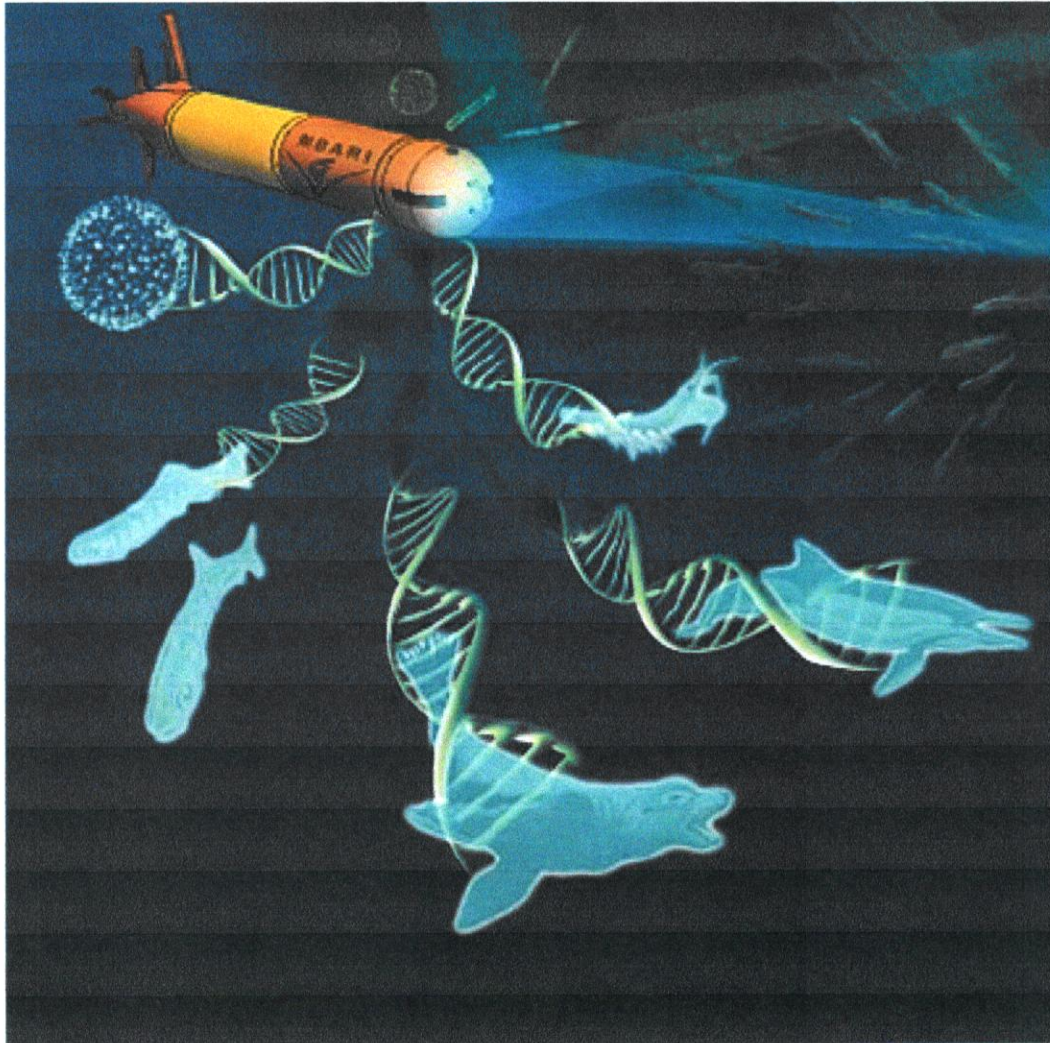

Department of Chemistry  
Faculty of Mathematics and Natural Sciences  
Hasanuddin University  
Makassar, Indonesia

---

ISSN: 2085-014X

# **Indonesia Chimica Acta**

## **Editorial Board**

### ***Editor in Chief***

Muhammad Zakir  
Department of Chemistry  
Hasanuddin University, Kampus Tamalanrea, 90245 Indonesia  
e-mail: muh.zakir@science.unhas.ac.id

### ***Managing Editor***

Abdurrahman Arif

### ***Board of Editors***

Tsutomu SEKINE, Department of Chemistry, Tohoku University, Sendai Japan  
Maria Magdalena Titiricci, Queen Mary University, United Kingdom  
Ana Jorge Sobrido, Queen Mary University, United Kingdom  
Muhammad Nurdin, Department of Chemistry, Haluoleo University, Indonesia  
Ahyar Ahmad, Department of Chemistry, Hasanuddin University, Indonesia  
Heri Hermansyah, Department of Chemical Engineering, University of Indonesia  
Nunuk Hariani S, Department of Chemistry, Hasanuddin University, Indonesia  
Indah Raya, Department of Chemistry, Hasanuddin University, Indonesia  
Dominggus Male, Department of Chemistry, Pattimura University, Indonesia  
Paulina Taba, Department of Chemistry, Hasanuddin University, Indonesia  
Sri Harjanto, Department of Metallurgy, University of Indonesia  
Muhammad Abdul Kadir, Department of Chemistry, Bandung Institute of Technology, Indonesia  
Dahlang Tahir, Department of Physics, Hasanuddin University, Indonesia  
Sal Prima Yudha, Department of Chemistry, Bengkulu University, Indonesia  
Noor Fitri, Department of Chemistry, Islamic University of Indonesia  
Muhammad Amin, Department of Chemistry, Khairun University, Indonesia  
Lalu Zulkifli, Department of Chemistry, Mataram University, Indonesia  
Firdaus Zenta, Department of Chemistry, Hasanuddin University, Indonesia  
Ardiansyah Michwan, Department of Food Science and Technology, Bakri University, Indonesia  
Irdhawati, Department of Chemistry, Udayana University, Indonesia  
Nursiah La Nafie, Department of Chemistry, Hasanuddin University, Indonesia

### ***Type Setting and Layout***

Andi Muhammad Ansar

### ***Administration***

St Fauziah

Publisher: This journal is officially published by Department of Chemistry, Faculty of Mathematics and Natural Sciences, Hasanuddin University. It is published 2 times annually. Editorial address: Hasanuddin University Campus, Tamalanrea, Makassar 90245, Phone: 0411 586498; Fax: 0411 588551  
e-mail: kimiauh@unhas.ac.id  
website: <http://indonesiachimicaacta.wordpress.com>

---

Cover Topic:  
Marine biodiversity, methods to track the biodiversity of marine ecosystem

## DAFTAR ISI

### Research Articles

**Phytochemical and Toxicity Test of Extract of *Pterospermum celebium* Miq. Toward *Artemia Salina* Leach** 1-7

*Mirwadifah Samir, Nunuk Hariani, Firdaus, and Wahyuono*

**Determination of Antibacterial Activity of Extract of Talas Leaf Stalk (*Colocasia esculenta* L.) against *Staphylococcus aureus* and *Eschericia coli*** 8-13

*Erwin, Milisa, and Daniel*

**Effect of Enzymatic Chitosan from the Waste of Windu Shrimp (*Penaeus monodon*) as Basic Material for Antifungal Biofungicide** 14-23

*Satria, Hasnah Natsir and Ade Rosmana*

**Utilization Ethyl Acetate Fraction of Catappa Leaf (*Terminalia catappa*) as Bioreductor in AgNP Synthesis and Its Antibacterial Activity** 24-33

*Nursyamsi, Muhammad Zakir and Seniwati Dali*

**Determination of Specific Capacitance of Banana (*Musa paradisiaca*) Shell based Activated Carbon Modified by HNO<sub>3</sub>, H<sub>2</sub>SO<sub>4</sub> and H<sub>2</sub>O<sub>2</sub> Using Cyclic Voltammetry** 34-39

*Salmawati, Muhammad Zakir and Abdul Karim*

**DETERMINATION OF SPECIFIC CAPACITANCE OF BANANA (*Musa paradisiaca*) SHELL BASED ACTIVATED CARBON MODIFIED BY HNO<sub>3</sub>, H<sub>2</sub>SO<sub>4</sub>, AND H<sub>2</sub>O<sub>2</sub> USING CYCLIC VOLTAMMETRY**

Salmawati, Muhammad Zakir<sup>1</sup>, Abd Karim

Department of Chemistry, Hasanudin University, Jl Perintis Kemerdekaan KM 10 Tamalanrea, Makassar, Indonesia, 90245

**Abstrak.** Penelitian tentang modifikasi permukaan karbon aktif yang berasal dari pisang kapok dengan HNO<sub>3</sub>, H<sub>2</sub>SO<sub>4</sub> dan H<sub>2</sub>O<sub>2</sub> telah dilakukan melalui metode cyclic voltametri. Hasil modifikasi permukaan karbon aktif memberikan spektrum dengan peningkatan intensitas serapan. Karbon aktif dari kulit pisang kapok diaktivasi dengan aktivator H<sub>3</sub>PO<sub>4</sub>. Area permukaan karbon aktif sebelum dan setelah aktivasi adalah 64,75 m<sup>2</sup>/g, dan 148,01 m<sup>2</sup>/g. Analisis yang didasarkan pada pengukuran cyclic voltametri menunjukkan bahwa modifikasi permukaan dengan asam oksida dapat meningkatkan nilai kapasitansi spesifik. Kapasitansi spesifik sebelum dan setelah modifikasi dengan HNO<sub>3</sub>, H<sub>2</sub>SO<sub>4</sub>, dan H<sub>2</sub>O<sub>2</sub> adalah 1133,71 nF/g, 1009,72 nF/g, dan 412,67 nF/g.

Kata kunci: Modifikasi permukaan, kapasitansi spesifik, karbon aktif, dan cyclic voltametri

**Abstract.** This research has been carried out on surface modification of activated carbon with a banana peel kepok HNO<sub>3</sub>, H<sub>2</sub>SO<sub>4</sub> and H<sub>2</sub>O<sub>2</sub> were then measured using cyclic voltammetry. The result of this modification surface of active carbon in banana kepok peel HNO<sub>3</sub>, H<sub>2</sub>SO<sub>4</sub> and H<sub>2</sub>O<sub>2</sub> give as spectrum alteration with the increasing of absorption intensity. Active carbon of banana kepok peel is activated with H<sub>3</sub>PO<sub>4</sub> activator. The surface area of activated carbon before and after activation is 64,75 m<sup>2</sup>/g, and 148,01 m<sup>2</sup>/g. The analysis is based on cyclic voltammetry measuring showed that the surface modification which oxidative acid can increase specific capacitance values. The specific capacitance from the result before and after modification of HNO<sub>3</sub>, H<sub>2</sub>SO<sub>4</sub> and H<sub>2</sub>O<sub>2</sub> is not measurable, 1133,71 nF/g, 1009,72 nF/g dan 412,67 nF/g.

Keywords: Surface modification, specific capacitance, activated carbon, and cyclic voltammetry

---

<sup>1</sup>Corresponding author: muhammadzakir@gmail.com

## INTRODUCTION

Capacitor and battery electric energy storage is commonly used in electronic devices, electrochemical capacitors is one of supercapacitors that have high energy storage density and a long cycle. One of the supercapacitor electrode material that is currently widely used is through the use of activated carbon pore size scale of nanometers. The surface of large pores in activated carbon will produce electrodes with a large surface area<sup>[9]</sup>.

In the manufacture of activated carbon used banana peels as raw materials for banana peels contain enough carbon about 41.37%<sup>[7]</sup>. The process of making activated carbon is done in two stages. The first stage is the carbonization process raw materials to produce charcoal. The second stage is the activation process of charcoal to remove the hydrocarbons that coat the surface of the charcoal thus increasing the porosity of charcoal<sup>[6]</sup>.

Activated carbon surface modification done to increase the active group. Active group to be added is an oxygen group. On activated carbon modification nitric acid, pores appear more clean and flat. It is assumed that the impurities have been lost because of the treatment using nitric acid at the time of modification<sup>[2]</sup>.

Surface modification can increase the value of specific capacitance. Additionally, the increased specific surface area, the specific capacitance values obtained will rise. Specific capacitance measurement can be done using the method Cyclic voltammetry Cyclic voltammetry measurement is done by giving a certain potential in electrochemical cells tested, from potential high to low and back to high<sup>[1][10]</sup>.

Based on the above explanation we conducted this study to modify the surface of activated carbon with a banana peel HNO<sub>3</sub>, H<sub>2</sub>SO<sub>4</sub> and H<sub>2</sub>O<sub>2</sub> using Cyclic voltammetry

method to determine the value of the capacitance of activated carbon.

## RESEARCH METHODS

### a. Making Activated Carbon

Banana peelkepok cleaned both ends, then cut into 3-4 parts<sup>[8]</sup>. Cut into pieces of dried banana peels in the sun and then put it in the oven at 110 ° C for 2 hours. Banana skin was clean and dry carbonized at a temperature of 277 ° C for 30 minutes. After that, cooled in a desiccator for 1 hour. Then crushed and sieved with a 100 mesh sieve [5]. Carbon banana peel inserted into the container and then soaked with a solution of activator H<sub>3</sub>PO<sub>4</sub> 7% by volume ratio H<sub>3</sub>PO<sub>4</sub> / carbon mass 10: 1, before soaking stirring for 30 minutes. Then allowed to stand for 24 hours. After that, the carbon that has been silenced filtered using a Buchner funnel. The precipitate obtained is then ditanur with a temperature of 600 ° C for 30 minutes. Then the carbon that has been heated, washed with hot distilled water several times until neutral pH. Samples were obtained dried in an oven at 110 ° C for 1 hour<sup>[5][8]</sup>.

### b. Surface Characterization of Activated Carbon

Activated carbon as much as 0.2 grams of banana peel mixed with 50 mL of methylene blue solution then distirer 300 ppm for 30 minutes. Subsequently the mixture was filtered, and the filtrate was measured absorbance at the wavelength of maximum<sup>[8]</sup>.

### c. Surface Modification of Activated Carbon

Carbon that has been activated mixed with chemical agents HNO<sub>3</sub> 65%, H<sub>2</sub>SO<sub>4</sub> 95%, H<sub>2</sub>O<sub>2</sub> 30% by mass ratio of 5:1 (mass chemicals (mL): mass activated carbon (g), and then shaken at a constant rate (120 oscillations per min) for 24 hours. After it

was washed with distilled water repeatedly until it gets pH neutral, then dried in an oven for 24 hours at a temperature of 110 ° C [8].

#### d. Characterization of Activated Carbon by Method Boehm

Activated carbon as much as 0.5 grams of banana peel put in a 50 mL volumetric flask 4, each of which contains 0.05 N Na<sub>2</sub>CO<sub>3</sub>, NaHCO<sub>3</sub> 0.05, 0.05 and 0.05 N NaOH/HCl then the mixture dishaker 24 hour. Afterwards the solution is separated from the carbon decantation. The solution that has been separated, respectively taken as many as 10 mL is Na<sub>2</sub>CO<sub>3</sub>, NaHCO<sub>3</sub>, NaOH, then added a solution of HCl and then ditirasi indicators PP using 0.05 N NaOH solution which has been standardized to a solution of oxalic acid and HCl taken as 10 mL and added a solution of NaOH and indicators MM, then titrated using standardized HCl using Na<sub>2</sub>B<sub>4</sub>O<sub>7</sub><sup>[4]</sup>.

#### e. Capacitance Measurement Specification

Carbon modified by HNO<sub>3</sub>, H<sub>2</sub>SO<sub>4</sub> and H<sub>2</sub>O<sub>2</sub> respectively mixed with paraffin wax with a mass ratio of carbon / mass of paraffin wax is 1: 2 and stirred until homogeneous using a spatula on a petri dish. Body connecting wire electrode is made with copper and platinum soldering using steam, a wire is inserted into the pipette and glued using parafilm. Thereafter, a carbon paste electrodes inserted into the body with pressed using a spatula in order to solidify and equitable<sup>[11][12]</sup>.

Carbon paste electrodes measured specific capacitance of energy storage by using cyclic voltammetry technique. These measurements use the tool Potentiostats EA161 with three electrodes, Pt electrode, an electrode Ag / AgCl and carbon paste electrodes. Tests carried out at a rate of scan electrodes 250 mV / s using 0.1 M H<sub>2</sub>SO<sub>4</sub> solution thus obtained voltammograms voltage and current, then the calculated value of specific capacitance of energy storage<sup>[3]</sup>.

## RESULTS AND DISCUSSION

### a. Surface Characterization of Activated Carbon

Adsorption of methylene blue is one method used to determine the surface area based on the absorption of methylene blue. The amount of methylene blue adsorbed is proportional to the surface area.

Furthermore, it can calculate the surface area of the carbon by the following equation.

$$S = \frac{X_m \cdot N \cdot a}{Mr}$$

The surface area of activated carbon before and after activation can be seen in Table 1.

### b. Surface Modification of Activated Carbon

Surface modification of activated carbon in this study conducted using HNO<sub>3</sub>, H<sub>2</sub>SO<sub>4</sub> and H<sub>2</sub>O<sub>2</sub>. The presence of oxygen groups such as carbonyl, carboxyl, hidroksil and quinones of the modified surface with HNO<sub>3</sub>, H<sub>2</sub>SO<sub>4</sub> and H<sub>2</sub>O<sub>2</sub> characterized using FT-IR.

Table 1. Surface Carbon

| Samples               | Surface Area (m <sup>2</sup> /g) |
|-----------------------|----------------------------------|
| Carbon non Activation | 64,75                            |
| Carbon Activation     | 148,01                           |

Table 2. Surface Functional Groups Activated Carbon by titration Boehm

| Samples  | GugusAsam (meq/g) |        |        |        | Gugus Basa (meq/g) |
|--|-------------------|--------|--------|--------|--------------------|
|  | Karboksil         | Lakton | Fenol  | Total  |                    |
| Karbon aktif non treatment                                   | 0,282             | 0,000  | 0,111  | 0,393  | 1,793              |
| Karbon aktif hasil modifikasi HNO <sub>3</sub>               | 1,23              | 0,074  | 0,0595 | 1,3635 | 4,6435             |
| Karbon aktif hasil modifikasi H <sub>2</sub> SO <sub>4</sub> | 0,605             | 0,00   | 0,00   | 0,605  | 3,77               |
| Karbon aktif hasil modifikasi H <sub>2</sub> O <sub>2</sub>  | 0,707             | 0,00   | 0,159  | 0,866  | 1,82               |

In Table 2 illustrates that the active carbon HNO<sub>3</sub> modification results show increased concentrations of acid and basic groups. Activated carbon modified H<sub>2</sub>SO<sub>4</sub> showed an increased concentration of the acid carboxyl and an increase in basic groups. Activated carbon modified H<sub>2</sub>O<sub>2</sub> showed increased concentrations of the carboxyl acids and phenols and improvement of basic groups.

**c. Capacitance Measurement Specification**

Cyclic voltammetry testing aims to determine the value of specific capacitance of activated carbon modified. In the manufacture of copper wire electrode body measuring 6 cm connected with a 4 cm platinum wire soldering using steam. Grafting with vapor soldering solder because it has a stable

temperature and does not damage the wire. The connection wire is inserted into the pipette measures 7 cm, then glued with parafilm. Making carbon paste, paraffin wax mixed with activated carbon at a ratio of 1: 2. Mixing is done above the hotplate, after mixing occurs evenly, carbon paste electrodes inserted into the body and glued together using a spatula. capacitors which have been so measured capacitance using a potentiostat with techniques Cyclic voltammetry (CV). CV testing is done by using a potentiostat. The data obtained from testing CV is the current curve (A) -potential (V). CV test results on activated carbon modified by HNO<sub>3</sub>, H<sub>2</sub>SO<sub>4</sub> and H<sub>2</sub>O<sub>2</sub> can be seen in image2.

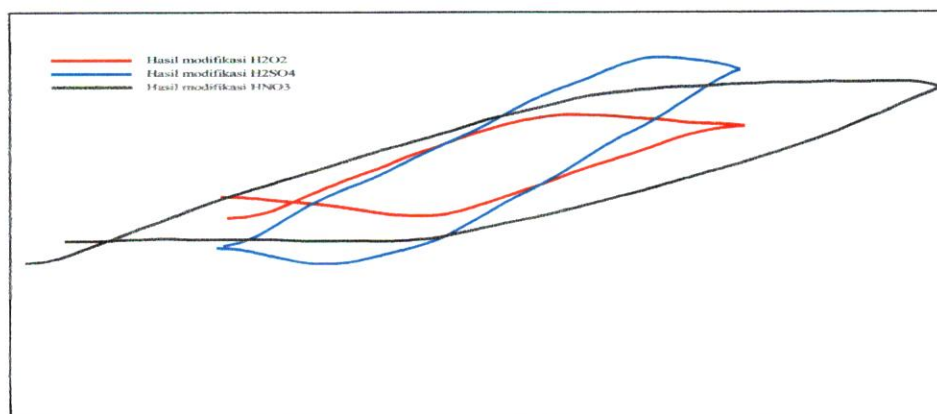


Figure 2. Modified Activated Carbon Voltammogram HNO<sub>3</sub>, H<sub>2</sub>SO<sub>4</sub> and H<sub>2</sub>O<sub>2</sub>

Based on the above it can be seen that the voltammogram activated carbon modified lasted  $\text{HNO}_3$  stable since the magnitude of the current density remained almost concomitant increase in the potential difference and at the time of discharge, the charge that came out was almost stable, compared with activated carbon modified  $\text{H}_2\text{SO}_4$  and  $\text{H}_2\text{O}_2$ . Specific capacitance value of carbon paste electrodes modified  $\text{HNO}_3$ ,  $\text{H}_2\text{SO}_4$  and  $\text{H}_2\text{O}_2$  can be seen in Table 2.

From the data in Table 2, it is known that the electrochemical capacitor capacitance of activated carbon modified by  $\text{HNO}_3$  1133.71 nF / g, the activated carbon modified  $\text{H}_2\text{SO}_4$  amounting to 1009.72 nF / g, and activated carbon modified by  $\text{H}_2\text{O}_2$  412.67 nF / g.  $\text{HNO}_3$  modified activated carbon has a better ability into electrochemical capacitors compared with activated carbon modified  $\text{H}_2\text{SO}_4$ ,  $\text{H}_2\text{O}_2$ .

Table 2. Data Cyclic voltammetry of carbon paste electrodes

| Elektroda Pasta Karbon                  | Ic   | Id    | V (v/s) | m (g) | Cs (nF/g) |
|---|------|-------|---------|-------|-----------|
| Karbon non modifikasi                   | -    | -     | 0,25    | 0,07  | -         |
| Hasilmodifikasi $\text{HNO}_3$          | 9,93 | -9,91 | 0,25    | 0,07  | 1133,71   |
| Hasilmodifikasi $\text{H}_2\text{SO}_4$ | 9,50 | -8,17 | 0,25    | 0,07  | 1009,72   |
| Hasilmodifikasi $\text{H}_2\text{O}_2$  | 9,24 | 3,05  | 0,25    | 0,06  | 412, 67   |

## CONCLUSION

The conclusion of the research that has been done is the surface area of activated carbon kepok banana skin before and after activation with  $\text{H}_3\text{PO}_4$  consecutive activator is 64.75 m<sup>2</sup> / g, and 148.01 m<sup>2</sup> / g. Based on the image of the spectrum that the functional groups on activated carbon kepok banana skin before and after surface modification provides absorption spectrum changes in the form of increased absorption intensity. Values specific capacitance of activated carbon kepok banana skin before and after modification with  $\text{HNO}_3$ ,  $\text{H}_2\text{SO}_4$  and  $\text{H}_2\text{O}_2$  in a row is not measurable, 1133.71 nF / g, 1009.72 nF / g and 412,67nF / g.

## REFERENCES

- [1] Ariyanto, T., Prasetyo, I., dan Rochmadi, 2012, Pengaruh Struktur Pori Terhadap Kapasitansi Elektroda Superkapasitor yang Dibuat dari Karbon Nanopori, *Reaktor*, **14**(1): 25-32.
- [2] Harti, R., Allwar. Dan Fitri, N., 2014, Karakterisasi Dan Modifikasi Karbon Aktif Tempurung Kelapa Sawit Dengan Asam Nitrat Untuk Menjerap Logam Besi Dan Tembaga Dalam Minyak Nilam, *Chemical Research – Inco.J.Chem.Res*, **1** (2), 74-83.
- [3] Himmaty, I. dan Endarko, 2013, Pembuatan Elektroda dan Perancangan Sistem Capacitive Deionization untuk Mengurangi Kadar Garam pada Larutan Sodium Clorida ( $\text{NaCl}$ ), *Berkala Fisika*, **16** (3), 67-74.
- [4] Ismanto, A.E., Wang, S., Soetaredjo, F.E., dan Ismadji, S., 2010, Preparation of Capacitor's Electrode from Cassava Peel Waste, *Bioresource Tech*, **101** (2010), 3534-3540.
- [5] Labanni', A, Zakir, M. Dan Maming., 2013, Sintesis Dan Karakterisasi Karbon

- Nanopori Ampas Tebu  
(*Saccharum officinarum*) dengan  
Aktivator  $ZnCl_2$  Melalui Radiasi  
Ultrasonik Sebagai Bahan Penyimpanan  
Energi Elektrokimia, *Indo.Chim. Acta*, **8**  
(1).
- [6] Mody, L., 2014, Pembuatan Dan  
Kegunaan Arang Aktif, *Info Teknis  
EBONI*, **2** (11), 65-80.
- [7] Mopoung, S., 2008, Surface Image of  
Charcoal and Aktivated Charcoal from  
Banana Peel, *J. of Microscopy Society of  
Thailand*, **22**, 15-19.
- [8] Najma, 2012, *Pertumbuhan Nanokarbon  
Menggunakan Karbon Aktif dari Limbah  
Kulit Pisang dengan Metode Pirolisis  
Sederhana dan Dekomposisi Sederhana*,  
Skripsi S1 Universitas Indonesia.
- [9] Prandika, L. dan Susanti, D., 2013,  
Analisa Sifat Kapasitif Kapasitor  
Elektrokimia  $WO_3$  Hasil Sintesa Sol Gel  
dengan Variasi Temperatur Kalsinasi, *J.  
Tek. Pomits*, **2** (2), 372-377.
- [10] Sari, I.P., dan Endarko, 2015,  
Fabrikasi dan Karakterisasi Elektroda  
Karbon untuk Sistem Desalinasi Larutan  
KCl dengan Metode Freezing Thawing,  
*Berkala Fisika*, **1** (18), 17-24.
- [11] Vytras, K., Svancara, I. and Metelka,  
R., 2009, Carbon Paste Electrodes in  
Electro analytical Chemistry, *J. Serb.  
Chem. Soc.*, **74** (10), 1021-1033.
- [12] Wachid, F.M. dan Darminto, 2012,  
Analisa Fasa Karbon Tempurung Kelapa,  
*Jurnal Teknik POMITS*, **1** (1), 1-4.

## PEDOMAN BAGI PENULIS

### GUIDE FOR AUTHORS

Ruang lingkup naskah yang dimuat dalam *Indonesia Chimica Acta* merupakan hasil penelitian dan pengembangan dalam bidang kimia secara umum baik eksperimen maupun teori/komputasi, inovasi teknologi berbasis kimia, dan aplikasi kimia di bidang industri. Naskah yang hendak dimuat merupakan naskah yang belum pernah diterbitkan dan ditujukan kepada redaksi *Indonesia Chimica Acta*, Jurusan Kimia Fakultas MIPA Universitas Hasanuddin, Kampus Tamalanrea 90245 Makassar.

**Naskah.** Naskah ditulis dalam bahasa Indonesia atau bahasa Inggris, diketik secara rapih pada kertas ukuran A4 menggunakan *software* pengolah kata versi *Windows Microsoft Word*, *WordPerfect*, *WordPro* atau *Wordstar* dengan jarak baris 1 spasi. Naskah ditulis dalam bentuk satu kolom dengan ukuran margin masing-masing 3 cm dan 2,5 cm untuk margin atas dan bawah, dan 3,5 cm dan 2,5 cm masing-masing untuk margin kiri dan kanan. Bentuk naskah harus mencakup bagian-bagian berikut ini (sesuai urutan): **Judul naskah** tidak lebih dari 30 kata, disertai nama penulis, nama instansi atau lembaga penulis dan alamat penulis yang mudah dihubungi. Sertakan pula telepon, fax atau e-mail. Judul naskah ditulis kembali di dalam abstrak sebagai kalimat pertama. **Abstrak** ditulis dalam bahasa Indonesia dan bahasa Inggris mencakup latar belakang, cara kerja, hasil dan kesimpulan. Abstrak ditulis singkat dan jelas dan tidak melebihi jumlah 200 kata. **Pendahuluan**, **Metode Penelitian** meliputi bahan dan cara kerja. **Hasil dan Pembahasan**, **Kesimpulan**, **Ucapan Terima Kasih** (jika ada) dan **Daftar Acuan**.

**Daftar Acuan.** Acuan daftar pustaka yang diacu diutamakan adalah terbitan 10 tahun terakhir, ditulis sesuai dengan kronologis pembahasan. Penomoran menggunakan angka Arab seperti contoh berikut: 1. Kim, T. K. and Takahashi, M. *Appl. Phys. Lett.*, 20 (1972) 492 atau 2. Yoshizawa, Y. Oguma, S. and K. Yamauchi, J. *Appl. Phys.*, 64 (1988) 10, untuk **Jurnal**, dan 3. A. Manaf dan Ridwan, *Pengaruh RP dalam Spin Casting pada Jumlah Porositas dan Sifat Mekanik Al-Paduan*, Prosiding Pertemuan Ilmiah Sains Materi III, Serpong (1988) 7, untuk **Prosiding**. Untuk daftar acuan dari **Buku** agar ditulis sebagai berikut: 4. A. R. West, *Solid State Chemistry and Its Applications*, John Wiley & Sons Inc., Singapore (1984) 475-80. **Bab dalam sebuah buku:** Rao, C.N.R, and Rao, K.J., "Ferroics" in *Solid State Chemistry Compounds*. Eds. Cheetam, A.K., and Day, P. P., Clarendon Press, Oxford (1992) 281-96.

**Gambar dan Tabel.** Keterangan gambar ditulis di bagian bawah gambar atau grafik dengan penomoran sesuai dengan alur pembahasan. Judul ditulis dengan huruf tebal miring (**Gambar 1**) sejajar dengan teks tanpa indent. Setiap gambar diberi keterangan sejelas dan seinformatif mungkin. Apabila diminta, gambar asli akan dikembalikan kepada penulis dalam waktu selambat-lambatnya 1 (satu) bulan. Apabila dalam jangka waktu yang telah ditentukan penulis tidak menghendaki gambar tersebut, redaksi berhak memusnahkan gambar tersebut. Keterangan tabel ditulis di bagian atas tabel dengan penomoran sesuai dengan alur pembahasan. Judul tabel ditulis dengan huruf tebal miring (**Tabel 1**), sejajar dengan teks tanpa indent. Setiap tabel diberi keterangan sejelas dan seinformatif mungkin.

**Persamaan.** Penulisan persamaan kimia dan atau persamaan matematika dilakukan tanpa indent dan diberi nomor dengan angka arab, sesuai dengan alur pembahasan.

Naskah yang dikirimkan ke redaksi Jurnal Akta Kimia Indonesia (*Indonesia Chimica Acta*) sebanyak 3 kopi dan 1 disket/CD berisi file dari naskah dan file terpisah dari gambar/grafik/tabel disertai keterangan yang diperlukan. Foto dicetak hitam putih dan mengkilat. Dewan redaksi berhak menolak suatu karangan yang dianggap tidak memenuhi syarat setelah mendengar pendapat beberapa ahli. Dewan redaksi berhak mengubah dan menyesuaikan bahasa dan istilah tanpa perubahan isi, dengan tidak memberitahukan kepada penulis terlebih dahulu. Jika perubahan isi dianggap perlu, maka akan dikonsultasikan dengan penulis. Naskah yang dimuat dalam Jurnal Akta Kimia Indonesia (*Indonesia Chimica Acta*) menjadi hak Jurusan Kimia Fakultas Matematika dan Ilmu Pengetahuan Alam Universitas Hasanuddin dan penerbitan kembali harus seizin Dewan Redaksi.



9 772085 014005

---