

Characteristic_of_Variable_Compression_Ratio_Diese.pdf

by

FILE	CHARACTERISTIC_OF_VARIABLE_COMPRESSION_RATIO_DIESE.PDF (423.07K)		
TIME SUBMITTED	17-SEP-2020 01:18PM (UTC+0700)	WORD COUNT	2420
SUBMISSION ID	1389266573	CHARACTER COUNT	12951

PAPER • OPEN ACCESS

Characteristic of Variable Compression Ratio Diesel Engine Operating on Diesel and Biodiesel B20

50

To cite this article: N Amaliyah *et al* 2020 *IOP Conf. Ser.: Mater. Sci. Eng.* **875** 012059

View the [article online](#) for updates and enhancements.

Characteristic of Variable Compression Ratio Diesel Engine Operating on Diesel and Biodiesel B20

N Amaliyah^{1*}, B Mire¹, A E E Putra¹, M Syam¹, and H Zakariah¹

¹Department of Mechanical Engineering, Faculty of Engineering, Hasanuddin University, Gowa, Indonesia

*Email: novriany@unhas.ac.id

Abstract: The limitation of natural resources especially crude oil employed in automotive engine has made an attention to switch over to biodiesel. Biodiesel is known as carbon neutral and produce no carbon dioxide leads to decrease of pollution and potentially improve the engine performance. In this study, an experimental investigation on variable compression ratio diesel engine is observed based on the engine performance using the VCR Engine test setup 1 cylinder, 4 strokes with EGR (computerized). The effect of compression ratio change on the torque, specific fuel consumption (SFC), indicated power, and brake thermal efficiency has been studied using mineral diesel and biodiesel B20. When increasing the compression ratio from 13 to 18, it was found that torque was significantly increased when using biodiesel B20. As the torque increase resulted in higher indicated power. The decreasing of SFC were about 44% and 11% for mineral diesel and biodiesel B20 respectively. Specific fuel consumption was optimum at 0.21 g/kW.h at a compression ratio of 16 using mineral diesel.

1. Introduction

In recent years, the limitation of natural resources such as crude oil, coal and so forth that are employed in power plants, boilers, and some automotive engine has been growing fast. These condition forced to the transition towards alternative fuels. Also, there is a huge amount of pollution in the atmosphere due to the [44](#)ning of those natural resources. The combustion of fossil fuel in Internal Combustion (IC) engine is one of the major sources that contribute to [air pollution](#).

As a clean fuel produced from domestic and renewable [30](#)sources, the utilization of biodiesel is gaining significant attention nowadays [26](#). Biodiesel is derived from vegetable oils or animal fats and can be blended in any proportion with diesel. It is also [more](#) environmentally [friendly and non-toxic compared to ordinary diesel](#) and can be used in diesel engines with minimal modification [1, 2]. Biodiesel can be produced from many feedstocks such as Jojoba oil [3], Jatropha oil [4], Mustard oil [5], waste frying oil [2], and palm oil [6] to name a few. The yield of biodiesel oil not only depend on the feedstock but also the catalyst and process used.

The Indonesian biofuels mandate is one of the most aggressive in the world especially biodiesel by setting an ambitious blending target. Out of 64 countries having biofuels targets and/or mandates, fewer than 10 impose biodiesel mandates. From those that do, except [43](#)ta Rica that has 20% biodiesel mix mandate, none of the countries mandate more than 10% mix. [Based on the Ministry of Energy and Mineral Resources regulation 12/2015](#), percent of biofuel blending required is expected to increase from 15% in 2015 to 30% in 2025 [7].

Recently, the researchers have heightened that the utilization of biodiesel has a significant effect on the performance and emission characteristic of a diesel engine. In this study, the performance characteristic of the variable compression ratio diesel engine was investigated using mineral diesel and biodiesel B20 produced by PERTAMINA.

2. Literature Review

Performance of engine in terms of power output, mechanical efficiency, exhaust temperature, specific fuel consumption and thermal efficiency of biodiesel and its blend have been studied by many researchers. The effect of change in compression ratio (CR), exhaust gas recirculation (EGR) and EGR temperature on the performance and emission characteristic has been studied using diesel-biogas dual fuel. Higher compression ratio was found to improve energy and exergy efficiency and on the emission side showed a significant decrease in HC, CO, and NO_x emission [8].

An investigation of the effect of compression ratio on a single-cylinder, four-stroke and direct injection of the diesel engine was conducted using biodiesel produced from mineral diesel blend with a waste fried oil methyl ester. A different blends of B0, B50, and B70 was observed at 14.5, 16.5, and 17.5 of compression ratio. It was found that higher compression ratios improve engine efficiencies such as specific fuel consumption, brake power, and brake thermal efficiency [9]. A performance test in a single cylinder four strokes variable compression ratio was conducted at 14:1, 16:1, and 18:1 using mustard oil methyl ester. It was observed that specific fuel consumption slightly increase and the brake thermal efficiency was maximum at full load when using B20 blended [5].

Experimental investigation on the effect of different blends of Jojoba Methyl Ester (JME) in diesel engine performance has been observed at different compression ratio from 18 to 23. The result showed, that compared with mineral diesel, JME at higher CR indicated greater improvement for biodiesel combustion, however, the emission produced when using JME was higher than mineral diesel [10]. The performance and emission of the diesel engine were studied using diesel and Sal seed oil methyl ester (SME). When the volume fraction of SME increase, brake thermal efficiency was found to decrease. However, in full load, brake specific energy consumption increased with the increase in the blend [11].

3. Research Method

The test was conducted using a VCR Engine test setup 1 cylinder, 4 strokes with EGR (computerized). Diesel engine connected to eddy current type dynamometer for loading. The compression ratio can be changed without stopping the engine and without altering the combustion chamber geometry by specially designed tilting cylinder block arrangement. The experiment was conducted at a constant engine speed of 1450 rpm and load 9 kg. Compression ratio was set at 13, 14, 15, 16, 17, and 18. Setup is provided with necessary instruments for combustion pressure and crank-angle measurements. The setup enables the study of VCR engine performance. Labview based Engine Performance Analysis software package "Enginesoft" is provided for online performance evaluation. The major specification is given in Table 1. The schematic diagram and engine picture are shown in Figures 1a and 1b.

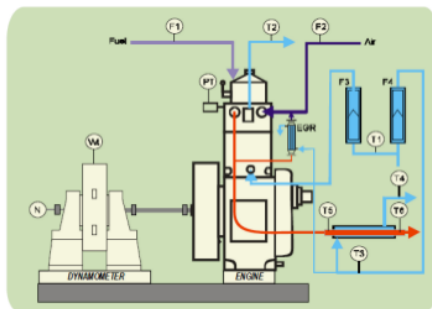


Figure 1a. Schematic diagram of engine test up



Figure 1b. Picture of engine test up

Table 1. Engine specification

Parameters	Technical Specification
Product	VCR Engine test up 1 cylinder, 4 strokes, Diesel with EGR (computerized)
Engine	Make Kirloskar, Type 1 cylinder, 4 stroke diesel, water-cooled, power 3.5 kW at 1500 rpm, stroke 110 mm, bore 87.5 mm, 661 cc, CR 17.5.
Fuel Tank	Capacity 15 lit with glass fuel metering column
EGR	Water cooled, ss 304, range 0-15%
Data Acquisition Device	NI USB-6210, 16 bit, 250kS/s
Temperature Sensor	Type RTD, PT100 and thermocouple type K
Software	“Enginesoft” engine performance analysis software
Overall Dimension	W 2000 x D 2500 x H 1500 mm

4. Result and Discussion

4.1. Engine Torque

The torque values of mineral diesel and biodiesel B20 as a function of compression ratio are shown in fig.2. It is revealed that the torque increased as the compression ratio increases for biodiesel B20 and slightly stable at mineral diesel. The increasing compression ratio resulted in increasing temperature and pressure in the cylinder causing torque to increase. Compared to the mineral diesel, the torque of biodiesel B20 is lower and in a range of 16.20 to 16.43 while mineral diesel was in a range of 16.39 to 16.42 as the compression ratio increased from 13 to 18. A similar result of the torque was observed in a range of 16-20 when B20 was used at a compression ratio of 14 to 18 using supercharged VCR diesel engine[12]. Due to the low volatility and higher viscosity of biodiesel B20, the increasing compression ratio had more effect on biodiesel B20 than mineral diesel.

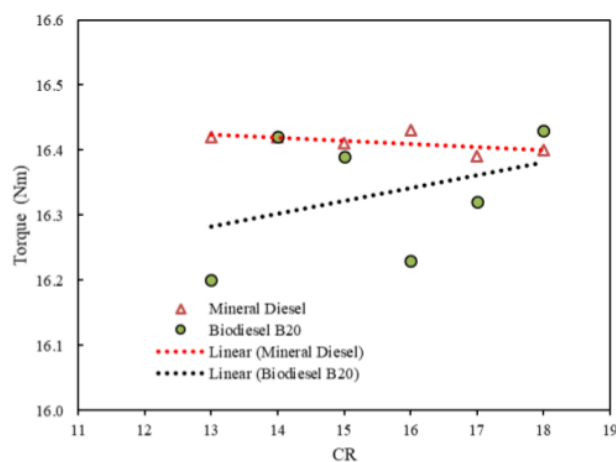


Figure 2. Variation of compression ratio on torque

9

4.2. Specific Fuel Consumption

The variation of specific fuel consumption on the increasing compression ratio is shown in fig. 3. The SFC is tended to decrease as the increasing of compression ratio. When using mineral diesel, the SFC is found to be lower than biodiesel B20 also the effect of increasing compression ratio had more benefit. It is assumed that in biodiesel B20 the cetane number and viscosity is lower than mineral diesel. As the compression ratio increase from 13 to 18, the decreasing of SFC were about 44% and 11% for mineral diesel and biodiesel B20 respectively.

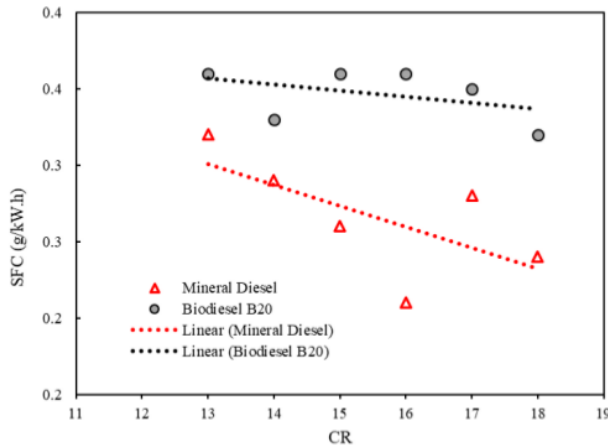


Figure 3. Variation of compression ratio on specific fuel consumption (SFC)

4.3. Indicated Power

Indicated power was defined as the power production in the cylinder. Indicated power was found to decrease by about 16% and 2.9% in mineral diesel and biodiesel B20 respectively as the increasing of compression ratio from 13 to 18 as shown in fig. 4. However, indicated power in mineral diesel is observed higher than biodiesel B20. The torque increase as the compression ratio increase due to the higher pressure inside the combustion chamber and so higher indicated power will result [13].

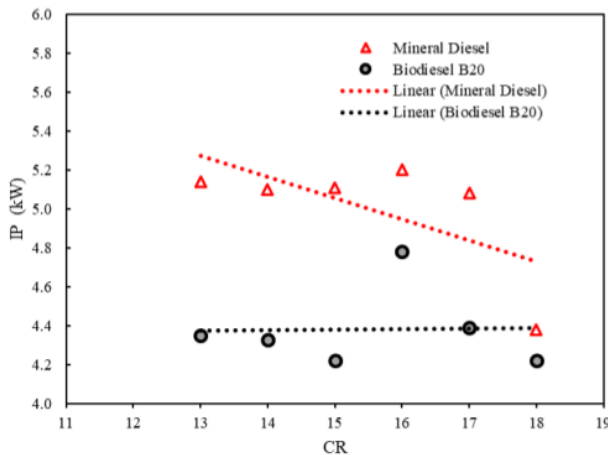


Figure 4. Variation of compression ratio on indicated power (IP)

4.4. Brake Thermal Efficiency (BTheff)

The brake thermal efficiency (BTheff) as a function of compression ratio using mineral diesel and biodiesel B20 is shown in fig. 5. As the compression ratio increased from 13 to 18, brake thermal efficiency increased by 17% for mineral diesel and 12% for biodiesel B20. This could be attributed to the lower volatility of biodiesel B20 compared to mineral diesel. Diesel engine performance improvement at higher compression ratio because of oxygen content that resulted in the complete combustion. In accordance with the present result, the previous study on engine performance using pure diesel and biodiesel from waste cooking oil of B10, B20, B30, and B50 showed that brake thermal efficiency of all biodiesel blend was lower than pure diesel [13].

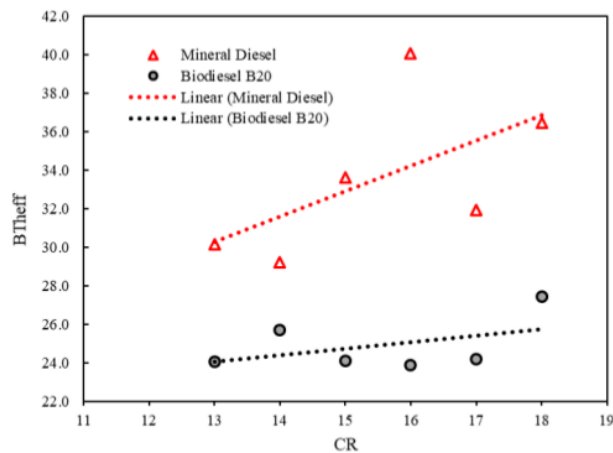


Figure 5. Variation of compression ratio on brake thermal efficiency (BTheff)

5. Conclusion

The effect of compression ratio on torque, specific fuel consumption, indicated power, and brake thermal efficiency of diesel engine fueled by biodiesel B20 have been investigated and compared with mineral diesel. Increasing compression ratio from 13 to 18 indicated a significant effect of increasing torque on biodiesel rather than mineral diesel resulted in higher indicated power. Brake thermal efficiency was higher when using mineral diesel and specific fuel consumption was optimum also when using mineral diesel. A further investigation will be conducted to study the combustion and emission of VCR diesel engine.

References

- [1] V. Bansal and S. K. Bhargava, "Ionic Liquids as Designer Solvents for the Synthesis of Metal Nanoparticles," 2009.
- [2] J. M. Fonseca, J. G. Teleken, V. D. C. Almeida, and C. Silva, "Biodiesel from waste frying oils: Methods of production and purification," vol. 184, no. December 2018, pp. 205–218, 2019.
- [3] A. M. Ashraful *et al.*, "Production and comparison of fuel properties, engine performance, and emission characteristics of biodiesel from various non-edible vegetable oils: A review," *ENERGY Convers. Manag.*, vol. 80, pp. 202–228, 2014.
- [4] F. Guo, Z. Fang, X. Tian, Y. Long, and L. Jiang, "Bioresource Technology "One-step production of biodiesel from Jatropha oil with high-acid value in ionic liquids" [Bioresource Technol. 102 (11) (2011)] q," *Bioresour. Technol.*, vol. 140, pp. 447–450, 2013.
- [5] K. Basavaraju and G. Jamunarani, "Performance and Emission Characteristics of a Variable Compression Ratio Diesel Engine Using Methyl Esters of Mustard Biodiesel Blends," *Int. J. Eng. Res. Appl.*, vol. 4, no. 11, pp. 20–28, 2014.

- [6] M. K. Lam, N. A. Jamalluddin, and K. T. Lee, *Production of Biodiesel Using Palm Oil*, 2nd ed. Elsevier, 2019.
- [7] A. Karina, C. Malins, and S. Searle, "Biofuels Policy In Indonesia : Overview And Status Report," *Int. Conf. Clean Transp.*, no. August, 2016.
- [8] S. Verma, L. M. Das, S. C. Kaushik, and S. S. Bhatti, *The effects of compression ratio and EGR on the performance and emission characteristics of diesel-biogas dual fuel engine*. Elsevier Ltd, 2019.
- [9] J. Hirkude and A. S. Padalkar, "Experimental investigation of the effect of compression ratio on performance and emissions of CI engine operated with waste fried oil methyl ester blend," *Fuel Process. Technol.*, vol. 128, pp. 367–375, 2014.
- [10] M. Hawi, A. Elwardany, S. Ookawara, and M. Ahmed, "Effect of compression ratio on performance, combustion and emissions characteristics of compression ignition engine fuelled with jojoba methyl ester," *Renew. Energy*, 2019.
- [11] H. S. Pali, N. Kumar, and Y. Alhassan, "Performance and emission characteristics of an agricultural diesel engine fueled with blends of Sal methyl esters and diesel," *Energy Convers. Manag.*, vol. 90, pp. 146–153, 2015.
- [12] M. El-adawy, M. El-, and Y. A. Eldrainy, "Performance characteristics of a supercharged variable compression ratio diesel engine fueled by biodiesel blends," *Alexandria Eng. J.*, 2018.
- [13] M. E. L. Kassaby and M. A. Nemit, "Studying the effect of compression ratio on an engine fueled with waste oil produced biodiesel / diesel fuel," *Alexandria Eng. J.*, vol. 52, no. 1, pp. 1–11, 2013.

ORIGINALITY REPORT

% **28**

SIMILARITY INDEX

%

INTERNET SOURCES

%

PUBLICATIONS

%

STUDENT PAPERS

PRIMARY SOURCES

- | | | |
|----------|---|------------|
| 1 | www.ijer.in
Internet Source | % 1 |
| <hr/> | | |
| 2 | Meshack Hawi, Ahmed Elwardany, Shinichi Ookawara, Mahmoud Ahmed. "Effect of compression ratio on performance, combustion and emissions characteristics of compression ignition engine fueled with jojoba methyl ester", Renewable Energy, 2019
Publication | % 1 |
| <hr/> | | |
| 3 | www.ijert.org
Internet Source | % 1 |
| <hr/> | | |
| 4 | Saket Verma, L.M. Das, S.C. Kaushik, S.S. Bhatti. "The effects of compression ratio and EGR on the performance and emission characteristics of diesel-biogas dual fuel engine", Applied Thermal Engineering, 2019
Publication | % 1 |
| <hr/> | | |
| 5 | Ali Şanlı, İlker Turgut Yılmaz, Metin Gümüş. "Experimental Evaluation of Performance and Combustion Characteristics in a Hydrogen– | % 1 |

Methane Port Fueled Diesel Engine at Different Compression Ratios", Energy & Fuels, 2019

Publication

6

Submitted to National Institute of Technology, Hamirpur

Student Paper

% 1

7

Hirkude, Jagannath, and Atul S. Padalkar. "Experimental investigation of the effect of compression ratio on performance and emissions of CI engine operated with waste fried oil methyl ester blend", Fuel Processing Technology, 2014.

Publication

% 1

8

www.ijarse.com

Internet Source

% 1

9

S. Kannan, S. Nagaraja, N. Mathankumar. "Experimental investigation on the effect of compression ratio over the performance of corn biodiesel–diesel blends as fuel in compression ignition engine", International Journal of Ambient Energy, 2020

Publication

% 1

10

www.ijrter.com

Internet Source

% 1

11

Submitted to University of Warwick

Student Paper

% 1

12

"Performance Emission of N-Octanol - Biodiesel Blend in Diesel Engine", International Journal of Recent Technology and Engineering, 2019

Publication

% 1

13

Submitted to International Islamic University Malaysia

Student Paper

% 1

14

Submitted to University Tun Hussein Onn Malaysia

Student Paper

% 1

15

"Biofuels and Bioenergy (BICE2016)", Springer Science and Business Media LLC, 2017

Publication

% 1

16

Submitted to Universiti Teknologi Petronas

Student Paper

% 1

17

G. Kartheek, K. Lakshmi Prasad, K. V. Viswanadh, Y. Sudhakar, Ch. Polayya. "Chapter 34 Multi-Response Optimization of Variable Compression Ratio CI Engine Using Grey–Taguchi Method", Springer Science and Business Media LLC, 2019

Publication

% 1

18

Ambarish Datta, Bijan Kumar Mandal. "An experimental investigation on the performance, combustion and emission characteristics of a variable compression ratio diesel engine using

% 1

diesel and palm stearin methyl ester", Clean Technologies and Environmental Policy, 2017

Publication

19

www.hindawi.com

Internet Source

% 1

20

S. M. Auti, W. S. Rathod. "Chapter 52 Design and Manufacturing of Test Rig for Pyrolysis of Waste Tyres of Two-Wheeler Vehicles (ELVs)", Springer Science and Business Media LLC, 2020

Publication

% 1

21

Submitted to University of Nottingham

Student Paper

<% 1

22

Shatesh Kumar Sangar, Chin Sook Lan, S.M. Razali, M.S. Ahmad Farabi, Yun Hin Taufiq-Yap. "Methyl ester production from palm fatty acid distillate (PFAD) using sulfonated cow dung-derived carbon-based solid acid catalyst", Energy Conversion and Management, 2019

Publication

<% 1

23

S. Ganesan, K. S. Sridhar Raja, J. Senthil Kumar. "Effects of MgO as an additive in canola oil – an experimental study", International Journal of Ambient Energy, 2018

Publication

<% 1

24

Submitted to Aston University

Student Paper

<% 1

-
- 25 ethesis.nitrkl.ac.in Internet Source <% 1
-
- 26 Submitted to Universiti Malaysia Terengganu UMT Student Paper <% 1
-
- 27 Mahmoud K. Ashour, Ahmed E. Elwardany. "Addition of two kerosene-based fuels to diesel-biodiesel fuel: Effect on combustion, performance and emissions characteristics of CI engine", Fuel, 2020 Publication <% 1
-
- 28 www.scientific.net Internet Source <% 1
-
- 29 Varun Goel, Naresh Kumar, Paramvir Singh. "Impact of modified parameters on diesel engine characteristics using biodiesel: A review", Renewable and Sustainable Energy Reviews, 2018 Publication <% 1
-
- 30 www.scribd.com Internet Source <% 1
-
- 31 ijapie.org Internet Source <% 1
-
- 32 Wan Ghazali, Wan Nor Maawa, Rizalman Mamat, H.H. Masjuki, and Gholamhassan <% 1

Najafi. "Effects of biodiesel from different feedstocks on engine performance and emissions: A review", Renewable and Sustainable Energy Reviews, 2015.

Publication

33

uemk.gantep.edu.tr

Internet Source

<% 1

34

S. Ganesan, J. Hemanandh, Syed Khwaja Azaharuddin, Charlapally Shashank Sharma. "Experimental investigation on DI diesel engine with blends of black jamun seed oil using Taguchi based optimization", AIP Publishing, 2019

Publication

<% 1

35

bnrc.springeropen.com

Internet Source

<% 1

36

www.springerprofessional.de

Internet Source

<% 1

37

www.omicsonline.org

Internet Source

<% 1

38

Nitin M. Sakhare, Pankaj S. Shelke, Subhash Lahane. "Experimental Investigation of Effect of Exhaust Gas Recirculation and Cottonseed B20 Biodiesel Fuel on Diesel Engine", Procedia Technology, 2016

Publication

<% 1

39

Vipul Vibhanshu, Ashish Karnwal, Amar Deep, Naveen Kumar. "Performance, Emission and Combustion, Analysis of Diesel Engine Fueled with Blends of Mahua Oil Methyl Ester and Diesel", SAE International, 2014

Publication

<% 1

40

Vaibhav R. Wakode, Amarsingh B. Kanase-Patil. "Regression analysis and optimization of diesel engine performance for change in fuel injection pressure and compression ratio", Applied Thermal Engineering, 2017

Publication

<% 1

41

Sunil G Dambhare, Sandeep S Kore, Firoz Z Pathan, Mandar Vahadane. "Diesel engine performance and emission characteristic enhancement using TOPSIS", International Journal of Advanced Technology and Engineering Exploration, 2019

Publication

<% 1

42

link.springer.com

Internet Source

<% 1

43

task32.ieabioenergy.com

Internet Source

<% 1

44

neptjournal.com

Internet Source

<% 1

45

Mofijur, M., A.E. Atabani, H.H. Masjuki, M.A.

Kalam, and B.M. Masum. "A study on the effects of promising edible and non-edible biodiesel feedstocks on engine performance and emissions production: A comparative evaluation", Renewable and Sustainable Energy Reviews, 2013.

Publication

<% 1

46

S.S. Bhatti, Saket Verma, S.K. Tyagi. "Energy and exergy based performance evaluation of variable compression ratio spark ignition engine based on experimental work", Thermal Science and Engineering Progress, 2019

Publication

<% 1

47

cot.unhas.ac.id

Internet Source

<% 1

48

www.ajchem-a.com

Internet Source

<% 1

49

Ashok Kumar Yadav, Mohd Emran Khan, Amit Pal. "Kaner biodiesel production through hybrid reactor and its performance testing on a CI engine at different compression ratios", Egyptian Journal of Petroleum, 2017

Publication

<% 1

50

Kumar, Niraj, Varun, and Sant Ram Chauhan. "Performance and emission characteristics of biodiesel from different origins: A review", Renewable and Sustainable Energy Reviews,

<% 1

2013.

Publication

51

"Recent Advances in Material Sciences",
Springer Science and Business Media LLC,
2019

Publication

<% 1

EXCLUDE QUOTES ON
EXCLUDE BIBLIOGRAPHY OFF

EXCLUDE MATCHES < 5
WORDS