

Three_layered_freed_forward_N N_based_MICEEI_2012.pdf

by

FILE	THREE_LAYERED_FREED_FORWARD_NN_BASED_MICEEI_2012.PDF (624.65K)		
TIME SUBMITTED	31-OCT-2019 01:33PM (UTC+0700)	WORD COUNT	3961
SUBMISSION ID	1204123457	CHARACTER COUNT	21925

Three Layered Feed-Forward Neural Network based Estimation of Output Power and Energy on Photovoltaic (PV) Modules

Syafaruddin, Wardi, Gassing, Zaenab Muslimin, Zulkifli Tahir, Engin Karatepe and Takashi Hiyama, *Senior Member, IEEE*

Abstract—The paper presents the application of three layered feed-forward neural network for predicting the output power and energy generation of photovoltaic (PV) modules. The neural network structure is designed to determine the estimated output power of PV modules based on the input of open circuit voltage and cell temperature. The open circuit voltage is one of the electrical parameters output from PV modules based *I-V* characteristic models from Sandia National Laboratory. The estimated energy of PV generation is obtained by connecting the estimated output power with simple mathematical integration process. The proposed method is tested to PV modules from different manufacturers and technologies, such as monocrystalline Silicon, Cadmium Telluride (CdTe) and triple junction amorphous Silicon. The simulation results show the high accuracy prediction compared to the conventional data measurements.

Index Terms—PV modules, TFFNN, estimated power, estimated energy, real-time simulator.

I. INTRODUCTION

SOLAR energy usage and penetration have recently increased significantly due to global environmental reasons and sustainable energy development. The solar energy technology can guarantee more secure power sources which are air and noise pollution-free, have longer lifetime and require low maintenance [1]. The technology also offers very competitive price and better reliability. The worldwide annual growth capacity has averaged a little more than 30% since the last decade [2]. As a result, solar energy is used in a wide range of applications; from rural energy electrification in [3] to satellite communication in [4]. However, it still remains a big

challenge for the global community to maximize the use of solar energy.

One of the main challenges is the output power and energy of PV modules are unpredictable due to variations in irradiance level and cell temperature. Therefore, it is inevitable to estimate the output power and energy of PV modules. Daily, monthly and yearly predictions are very important for the planning operation of the entire power systems when small-scale of PV modules are installed in the system. In the stand-alone and hybrid systems, the estimated output power is very useful for optimizing the operating condition of equipments, such as battery, inverter and charger controller [3], [5]. Moreover, the scheduling of other generation units in hybrid systems can be precisely determined for the sake of supply reliability and reduction in the investment cost [3]. Meanwhile, the estimated output energy of PV modules will be beneficial to the investment calculation of solar energy system [6].

The estimated output power of PV modules has been presented in some papers. In [7], the overall performance of PV systems, such as PV and inverter efficiency and overall system efficiency have been predicted using NSYS simulation software. This method is successful in predicting the output power of large PV system in the long term performance. The application of artificial neural network (ANN) has also been used to estimate the maximum power generation from PV module by using the environmental information, such as, irradiance level, temperature and wind velocity [8]. The benefits of using artificial neural network are that there is no requirement for knowledge on internal system parameters; requires less computational effort and provides a compact solution for multivariable problems [9].

In this paper, the application of ANN was utilized to predict the power generation of PV modules based on the variation in the irradiance level and cell temperature. In the neural network training process, the open circuit voltage based *I-V* characteristic model and the cell temperature are used as the input and the power at maximum power point based *I-V* characteristic model is used as the target output. For obtaining the estimated output energy, an integrator block is added in the estimated power which is an output of the ANN. To justify the

Syafaruddin*, Wardi, Gassing, Zaenab Muslimin and Zulkifli Tahir are with the Department of Electrical Engineering of Universitas Hasanuddin, 90245 Tamalanrea-Makassar, Indonesia (e-mail*: syafaruddin@unhas.ac.id) Engin Karatepe is with the Department of Electrical and Electronics Engineering, Ege University, 35100 Bornova-Izmir, Turkey (e-mail: engin.karatepe@ege.edu.tr)

Takashi Hiyama is with the Department of Computer Science and Electrical Engineering, Kumamoto University, 2-39-1 Kurokami, Kumamoto 860-8555, Japan (e-mail: hiyama@cs.kumamoto-u.ac.jp).



accuracy of the proposed method, several types of PV modules from different manufacturers and technologies (for instance, SIEMENS SM-55 PV module with monocrystalline silicon technology, First Solar FS-50 with Cadmium Telluride (CdTe) and USSC US-21 with Triple Junction Amorphous Si (a-Si-3) technologies) were used. All simulation results were verified in real-time simulator.

II. BASIC CONFIGURATION OF THE PROPOSED SYSTEM

In general, the proposed system consists of two main blocks, viz. the PV module and the ANN block. The electrical characteristic outputs of PV modules based on the I - V characteristic model can be obtained as a result of the change in the irradiance level (E) and cell temperature (T_c). Three of the electrical parameters, such as open circuit voltage (V_{oc}), current and voltage at maximum-power point (I_{mp} and V_{mp}) were used in the neural network training process. Although the short circuit current (I_{sc}) is denoted as “unused” in the network, but this parameter is very important to determine V_{oc} , I_{mp} and V_{mp} . Meanwhile, the open circuit voltage (V_{oc}) and cell temperature (T_c) are specified as the input in the ANN block. The output from ANN block is designated as the estimated power, whereas the output from PV module block is denoted as the measured power. The estimated energy and measured energy are obtained by connecting the integrator block to the estimated power and measured power respectively. Further details on the basic configuration of the proposed system shown in Fig.1 will be explained in the following sections.

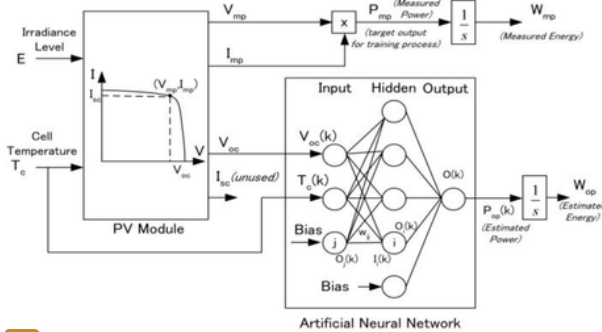


Fig. 1. Configuration of the proposed system

A. PV Module Configuration

There are four output electrical parameters of PV modules that can be derived from I - V characteristic model as the irradiance level (E) and cell temperature (T_c) change. These output parameters are short circuit current (I_{sc}), open circuit voltage (V_{oc}), current at maximum-power point (I_{mp}) and voltage at maximum-power point (V_{mp}). In this study, the I - V characteristic was developed based on the mathematical model

of Sandia’s PV Module Electrical Performance Model [10],

The short circuit current (I_{sc}) equation of PV module based on this model is presented as follows:

$$I_{sc} = I_{sc0} f_1(AM_a) \left(\frac{E_b f_2(AOI) + f_d E_{diff}}{E_o} \right) (1 + \alpha_{I_{sc}} (T_c - T_o)) \quad (1)$$

where

- I_{sc} at $E = 1000 \text{ W/m}^2$, $AM_a = 1.5$, $T_c = 25^\circ\text{C}$, $AOI = 0^\circ$
- $f_1(AM_a)$ empirically determined polynomial relating spectral influence on I_{sc} to air mass
- $f_2(AOI)$ empirically determined polynomial describing AOI influence on I_{sc}
- E_b beam component of irradiance on module
- f_d fraction of diffuse irradiance used by module
- E_{diff} diffuse component of irradiance on module
- $\alpha_{I_{sc}}$ normalized temperature coefficient for I_{sc}
- T_c temperature of cells inside module
- T_o reference temperature for performance model, 25°C

Equation (1) can be simplified by assuming the AM_a function is equal to 1.0 and combining the beam and diffuse components into single component irradiance, denoted by the irradiance level (E); as presented in (2).

$$I_{sc} = I_{sc0} \left(\frac{E}{E_o} \right) (1 + \alpha_{I_{sc}} (T_c - T_o)) \quad (2)$$

where

- E_o reference irradiance, 1000 W/m^2

Other equations, such as open-circuit voltage (V_{oc}), current at maximum-power point (I_{mp}), and voltage at maximum-power point (V_{mp}), are presented in (3) to (5).

$$V_{oc} = V_{oc0} + N_s \delta(T_c) \ln(E_e) + \beta_{V_{oc}} E_e (T_c - T_o) \quad (3)$$

$$I_{mp} = I_{mp0} (C_0 E_e + C_1 E_e^2) (1 + \alpha_{I_{mp}} (T_c - T_o)) \quad (4)$$

$$V_{mp} = V_{mp0} + C_2 N_s \delta(T_c) \ln(E_e) + C_3 N_s (\delta(T_c) \ln(E_e))^2 + \beta_{V_{mp}} E_e (T_c - T_o) \quad (5)$$

where

- V_{oc0} V_{oc} at $E_e = 1$, $T_c = T_o$
- I_{mp0} I_{mp} at $E_e = 1$, $T_c = T_o$
- V_{mp0} V_{mp} at $E_e = 1$, $T_c = T_o$
- $\alpha_{I_{mp}}$ normalized temperature coefficient for I_{mp}
- $\beta_{V_{oc}}$ temperature coefficient for V_{oc} at 1000 W/m^2
- $\beta_{V_{mp}}$ temperature coefficient for V_{mp} at 1000 W/m^2
- C_0, C_1 empirically determined coefficients relating I_{mp} to irradiance



C_2, C_3 empirically determined coefficients relating V_{mp} to irradiance
 N_s number of cells in series in a cell-string

The effective irradiance (E_c) and the thermal voltage per cell ($\delta(T_c)$) are presented in (6) and (7), respectively.

$$E_c = \frac{I_{sc}}{I_{sc0}(1 + \alpha_{I_{sc}}(T_c - T_o))} \quad (6)$$

$$\delta(T_c) = \frac{nk(T_c + 275.15)}{q} \quad (7)$$

where

n empirically determined diode factor for each cell in module
 k Boltzmann's constant, $1.38066 \cdot 10^{-23}$ J/K
 q elementary charge, $1.60218 \cdot 10^{-19}$ coulomb

The measured power (P_{mp}) is calculated by the multiplication between (4) and (5), while the measured energy (W_{mp}) is obtained by the integration of the P_{mp} . Both these equations are shown in (8) and (9).

$$P_{mp} = I_{mp} V_{mp} \quad (8)$$

$$W_{mp} = \int_i P_{mp} dt \quad (9)$$

TABLE I
SPECIFICATION OF PV MODULES

PV module specifications	SIEMENS SM-55	First Solar FS-50	USSC US-21
Materials	c-Si	CdTe	a-Si-3
Vintage	1999 (E)	2001 (E)	1999 (E)
Area (m ²)	0.425	0.72	0.356
N_s	36	116	11
I_{sc0} (A)	3.45	1.08	1.59
V_{oc0} (V)	21.7	85	23.8
I_{mp0} (A)	3.15	0.87	1.27
V_{mp0} (V)	17.4	58	20.9
$\alpha_{I_{sc}}$ (°C ⁻¹)	0.00055	0.00065	0.00085
$\alpha_{I_{mp}}$ (°C ⁻¹)	-0.00008	0.0022	0.0012
$\beta_{V_{oc0}}$ (V/°C)	-0.087	-0.22	-0.098
$\beta_{I_{mp0}}$ (V/°C)	-0.089	-0.098	-0.052
n	1.086	1.3	3.77
C_0	1.02	1.073	1.096
C_1	-0.02	-0.073	-0.096
C_2	0.08818	-1.25	-1.14162
C_3 (V ⁻¹)	-8.434	-18.544	-2.89115

(AM=1.5; 1000W/m²; 25°C)

Three types of PV module with different technologies were used in this study; viz. SIEMENS SM-55 PV, First Solar FS-50 and USSC US-21. SIEMENS SM-55 PV module which is built on monocrystalline Silicon technology can deliver high efficiency output power under reduced light condition by using pyramidal textured surface [12]. The First Solar FS-50 with CdTe technology is recommended when high output voltage is desired. This module uses very thin layers of compound semiconductor material with low temperature coefficients which provides for a cost-effective and greater energy production system [13]. The last module (USSC US-21) is equipped with the latest new triple junction technology. Instead of containing glass, this module is composed of encapsulated polymer inside a rigid anodized aluminum frame [14]. The PV module specification is presented in the Table I.

Based on the I - V characteristic model, each PV module has unique electrical response characteristics to the variations in irradiance levels and cell temperature. Fig. 2 shows that the P_{mp} of all PV module types increases proportionally with the variation in the irradiance levels. The difference is only at the maximum output power based module in the high irradiance level. At an irradiance level of 1000 W/m², both SIEMENS SM-55 and First Solar FS-50 PV modules reach the P_{mp} at about 50 W. For the same irradiance level, the P_{mp} achieved by the USSC US-21 is only about half the value attained by the other two types.

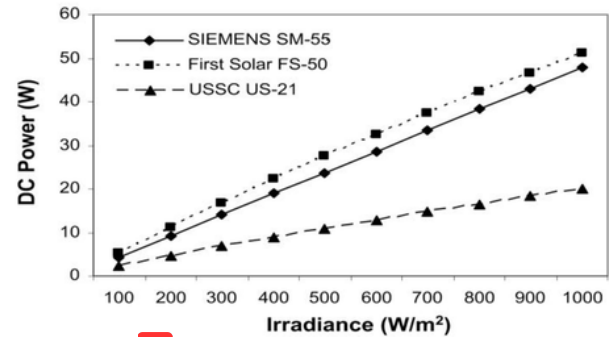


Fig. 2. Power at minimum-power point for PV modules at $T_c = 50^\circ\text{C}$

B. ANN based Estimated Output Power of PV Modules

In the proposed configuration, a three-layer feed forward neural network was used: an input, a hidden and an output layer to determine the estimated output power (P_{op}) of PV modules. The input layer consists of three nodes for the open circuit voltage (V_{oc}), cell temperature (T_c) and a bias signal of 1.0. In this study, the open circuit voltage was derived from (3), while the cell temperature was arbitrarily determined in the range of 10°C and 65°C. The number of nodes of hidden layer depends on the minimum error obtained during the



training process. The output layer provides the estimated output power. ¹⁴

In the hidden layer, the sigmoid function is utilized for the input-output characteristics of the nodes. For each node i in the hidden and output layers, the output $O_i(k)$ is given as follows:

$$O_i(k) = \frac{1}{1 + e^{-I_i(k)}} \quad (10)$$

The term $I_i(k)$ in (10) is the input signal to node i at the k -th sampling. The input $I_i(k)$ is given by the weighted sum of the input nodes as follows:

$$I_i(k) = \sum_j w_{ij}(k) \cdot O_j(k) \quad (11)$$

In (11), ¹⁵ is the connection weight from node j to node i and $O_j(k)$ is the output from node j .

To identify the estimated output power accurately, the connection weights w_{ij} must be calculated using typical patterns called the training process.

In the training process, a set of input-output patterns for neural network is required. During the training, the connection weights w_{ij} are modified recursively until the best fit is achieved for the input-output patterns based on the minimum value of the sum of the squared errors. The equation of the sum of the squared errors is described as:

$$E = \sum_{k=1}^N (t(k) - O(k))^2 \quad (12) \quad 19$$

where N is the total number of training patterns, $t(k)$ is the k -th target output from the output node and $O(k)$ is the computed value. Initially, the value of connection weights w_{ij} is set to random values. For all the training patterns, the error function is evaluated and the connection weights w_{ij} are updated to minimize the error in (12).

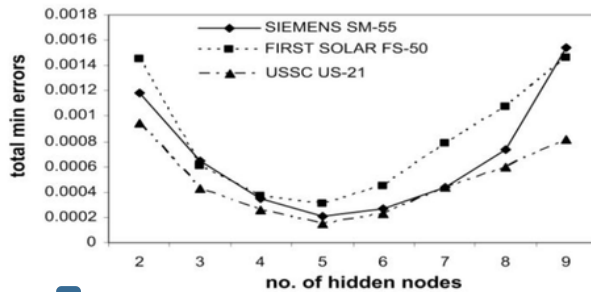


Fig. 3. Number of hidden nodes based on the total minimum errors. ⁸

The input for training data criteria is the open circuit voltage (V_{oc}) and cell temperature (T_c). The V_{oc} can be obtained from (4) with the given input of irradiance level between 100 and 1000 W/m^2 (with an increment of 50) and the

cell temperature from 10°C to 65°C (with an increment of 5°C) to the PV module. The reason for selecting these data due to the $I-V$ characteristic model proposed by Sandia National Laboratories is only valid for these data range. Again, the data range of V_{oc} used as the input must also be less than or equal to the value of V_{oc0} in Table I. The output target is the power at maximum-power point (P_{mp}) which can be calculated in (8). There are about 200 training sets for the training process due to these input-output criteria. During the training process, the learning rate and the momentum are specified to 0.2 and 0.85, respectively.

The number of hidden nodes is selected based on the total minimum errors during the training process. Fig.3 shows the result of training process related to the total minimum errors and number of hidden nodes. The total minimum errors of all PV module types are achieved when the number of hidden nodes is 5. It means that the connection weights w_{ij} of all modules have the same dimension.

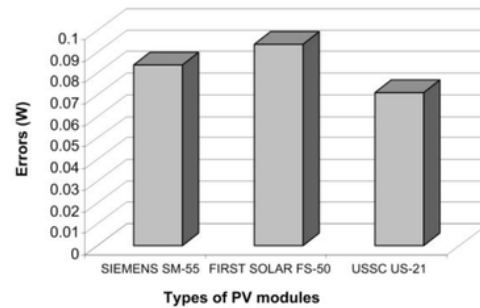


Fig. 4. Average errors between P_{op} and P_{mp}

The neural network training process has significant correlation with the $I-V$ characteristic of each module. The First Solar FS-50 PV module with different pattern of PV module had more difficulty in obtaining the total minimum errors. As a result, the First Solar FS-50 PV module showed slight increase in the average error between the estimated output power (P_{op}) and the output target, denoted as P_{mp} compared with the SIEMENS SM-55 and USSC US-21 PV modules. Verification the total minimum errors results in Fig.3 can be seen in Fig. 4.

III. SIMULATION RESULTS AND DISCUSSION

The estimated output power and energy of PV modules were obtained by changing in irradiance level and cell temperature as input from 5 a.m to 8 p.m on a daily basis to all types of PV modules. Both irradiance level and cell temperature were changing rapidly and were seen to be quite unpredictable due to environmental factors. The fluctuation of these variables can be seen in Fig. 5. The simulation results

show that the application of ANN for predicting the output power and energy of PV modules is quite precise. Fig. 6, 7 and 8 show the estimation results related to the output power and energy compared with the empirical measurement for SIEMENS SM-55, First Solar FS-50 and USSC US-21 PV modules, respectively.

Estimation of output power and energy of PV systems in the planning operation is very important since the output of the system depends on the environmental condition. Some benefits can be obtained by knowing the output power and energy of PV module early.

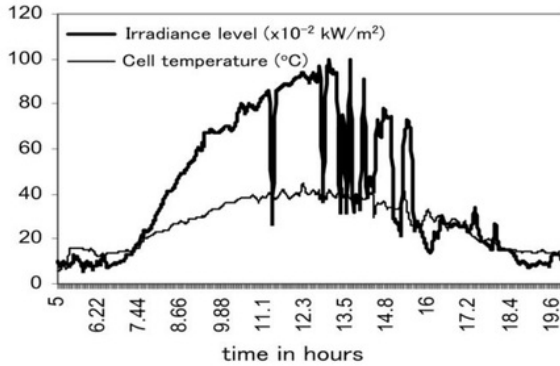


Fig. 5. Daily condition of irradiance level (E) and cell temperature (T_c).

There are two common operations of PV system in the grid, either in the form of stand-alone or hybrid systems. In the stand-alone and hybrid PV systems, the estimated power will be very useful to optimize the operation of equipment, such as battery and inverter. The optimized operation of battery in this case is related to the accuracy of charging and discharging schedules in order to prolong the life time of the battery and to reduce the low-load engine operation. In terms of inverter operation, the prediction of the inverter output can be done since the inverter efficiency is the function of output power of PV system.

Another advantage of predicting the output power of PV system in the hybrid operation is the availability of accurate scheduling for other units of generation, for instance the diesel engine and hydro power. Accurate prediction and coordination between units will improve the supply reliability and reduce the cost investment. At the end of the day, the estimated output power of PV system in hybrid system will contribute to reduce the fuel consumption, to optimize the number of operating hours and to reduce the maintenance cost for other units.

Similar to the benefits of predicting the output power, the estimated output energy of PV system can be beneficial to determine the estimated electricity tariff in certain power grid. The electricity cost which is measured in currency/kWh can be estimated as money saving when the PV system is connected

to the grid. Moreover, the benefits of solar energy investment which is specified as gain or loss can be figured out by using information of estimated output energy.

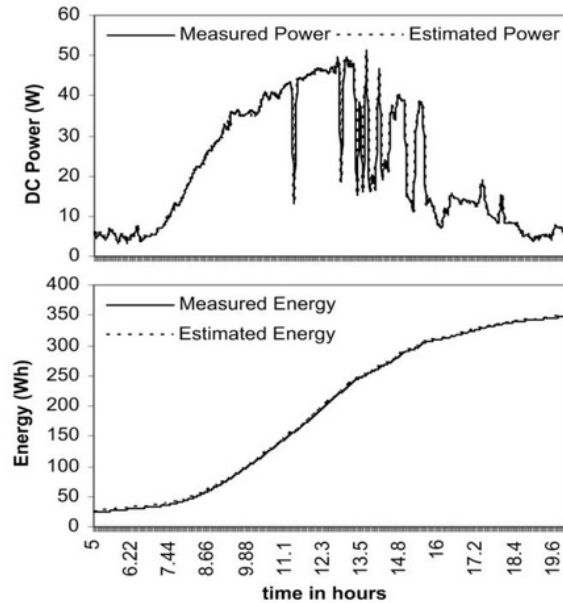


Fig. 6. Measured and estimated output power and energy for SIEMENS SM-55.

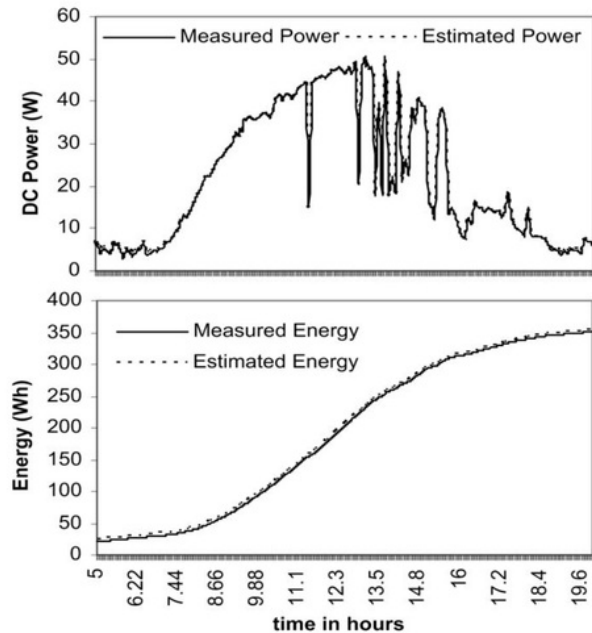


Fig. 7. Measured and estimated output power and energy for First Solar FS-50.



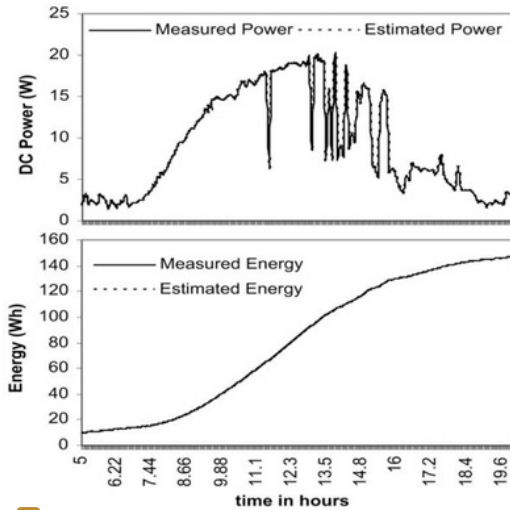


Fig. 8. Measured and estimated output power and energy for USSC US-21.

IV. CONCLUSIONS

The accuracy of the proposed ANN for predicting the real-time output power PV generation has been presented in this paper. ANN was used to estimate the optimum output power of PV module with the input of open circuit voltage based $I-V$ characteristic model and cell temperature. The ANN estimator is able to estimate the output power on PV modules of different technologies and from different manufactures for every variation in irradiance level and cell temperature, even without the PV module hardware. Consecutively, the estimated output energy can also be found by connecting the integrator to the estimated output power. Some discussions are presented to support the benefits of the proposed method. An extensive works are still required for further verification.

REFERENCES

- [1] Y. Sukamngkol, S. Chungpaibulpatana, and W. Ongsaku, "A simulation model for predicting the performance of a solar photovoltaic system with alternating current loads," *Renewable Energy* 27 (2002), pp. 237-258.
- [2] R. Wiser, M. Bolinger, P. Cappers and R. Margolis, (2006, August) "Analyzing historical cost trends in California's market for customer-sited photovoltaics," on *Progress in photovoltaics: Research and Application*. [Online] 6 in Wiley InterScience (www.interscience.wiley.com), DOI: 10.1002/pip.726
- [3] H. Gabler, "Autonomous power supply with photovoltaics: Photovoltaics for rural electrification-reality and vision-," *Renewable Energy IS* (1998), pp. 512-518.
- [4] D.J. Flood, "Advanced space photovoltaic technology: Applications to telecommunication systems," in *Proc. 1997 International Telecommunication Energy Conf.*, pp. 647-651.
- [5] W. Bower, R. DeBlaiso, "Code requirements and standards for installations of Photovoltaic systems in the US," on *Progress in photovoltaics: Research and Application*, pp.155-164 (1999).
- [6] A.H. Abdullah, A.A. Ghoneim, A.Y. Al-Hasan, "Kuwaiti Assessment of grid-connected photovoltaic systems in Kuwaiti Climate," *Pergamon: Renewable Energy* 26 (2002), pp. 189-199

- [7] J.D. Mondol, Y.G. Yohanis, B. Norton, "Comparison of measured and predicted long term performance of grid a connected photovoltaic system," *ScienceDirect: Energy Conversion and Management* 48 (2007), pp. 1065-1080.
- [8] T. Hiyama, and K. Kitabayashi, "Neural network based estimation of maximum power generation from PV module using environmental information," *IEEE Trans. Energy Conversion*, vol.12, pp.241-247, Sept. 1997.
- [9] E. Karatepe, M. Boztepe, and M. Colak, "Development of a suitable model for characterizing photovoltaic arrays with shaded solar cells," *Solar Energy* (2007) [Online]. Available: www.elsevier.com/locate/solener.
- [10] D.L. King, (Version, 2000). Sandia's PV module electrical performance model. Sandia National Laboratories, Albuquerque, New Mexico, September 5.
- [11] D.L. King, "Photovoltaic module and array performance characterization methods for all system operating conditions." in *Proc. 1997 NREL/SNL Photovoltaics Program Review Meeting*, pp. 1-22.
- [12] *Shell SM55 Photovoltaic Solar Module*, Solar Product Information Sheet, Feb. 2005. Available: www.shell.com/renewables.
- [13] *FS Series Solar Modules*, First Solar Information Sheet, Apr. 2004. Available: www.firstsolar.com
- [14] <http://www.smart.net/~solar/LineList/PVmodulesUSSC.html>, available on 28 September 2007



Syafaruddin received his B.Eng degree in Electrical Engineering from Universitas Hasanuddin, Indonesia, in 1996, M.Eng degree in Electrical Engineering from University of Queensland, Australia, in 2004 and D.Eng degree from Kumamoto University, Japan in 2009. He has been working in Kumamoto University as a project assistant professor for Graduate School of Science and Technology. His research interests include distributed generation planning, maximum power point tracking control of photovoltaic system, power system real-time simulation and neuro-fuzzy logic control application in power system.

Wardi, Gassing, Zaenab Muslimin and Zulkifli Tahir are lectures at the Department of Electrical Engineering of Universitas Hasanuddin, 90245 Tamalanrea-Makassar, Indonesia.



Engin Karatepe received his M.Sc from Electrical-Electronics Engineering at Ege University Turkey in 2000, and his Ph.D from the Institute of Solar Energy from the Ege University in 2006. He is currently part of the academic staff at Electrical-Electronics Engineering of Ege University. He was Postdoc fellow at the Department of Computer Science and Electrical Engineering at Kumamoto University, Japan in 2007. His current research interests include distributed power generation, system modeling, soft computing and intelligent systems applications on renewable energy power sources.



Takashi Hiyama received his B.E., M.S., and Ph.D degrees all in Electrical Engineering from Kyoto University Japan in 1969, 1971, and 1980, respectively. He joined Kumamoto University in 1971 and has been a Professor from 1989. During the period of June 1985 through September 1986, he was at Clarkson University, and was involved with power system harmonic research. His current interests include intelligent system applications to electric power systems and the applications of renewable energy power sources to power distribution systems operation, control and management. He is a Senior Member of IEEE, a member of IEE of Japan and Japan Solar Energy Society.



ORIGINALITY REPORT

% **17**
SIMILARITY INDEX

% **8**
INTERNET SOURCES

% **13**
PUBLICATIONS

% **12**
STUDENT PAPERS

PRIMARY SOURCES

1 www.oja-services.nl % **2**
Internet Source

2 于 2012-11-26 提交至 University of Northumbria at Newcastle % **1**
Student Paper

3 Ranjeeta Khare, Yogendra Kumar. "Application of GA on size optimization of solar-DG-battery storage HRES with reliability and CO2", 2014 Annual IEEE India Conference (INDICON), 2014 % **1**
Publication

4 hal.archives-ouvertes.fr % **1**
Internet Source

5 www.gsst.kumamoto-u.ac.jp % **1**
Internet Source

6 A. Mellit, H. Mekki, S. Shaari. "FPGA-based neural network for simulation of photovoltaic array: application for estimating the output power generation", 2008 33rd IEEE Photovoltaic Specialists Conference, 2008 % **1**

-
- | | | |
|---|---|-----|
| 7 | eeqsba.com.au
Internet Source | % 1 |
|---|---|-----|
-
- | | | |
|---|---|-----|
| 8 | Submitted to University of Sheffield
Student Paper | % 1 |
|---|---|-----|
-
- | | | |
|---|---|-----|
| 9 | Submitted to Malaviya National Institute of Technology
Student Paper | % 1 |
|---|---|-----|
-
- | | | |
|----|---|-----|
| 10 | Marius Paulescu, Viorel Badescu, Ciprian Dughir. "New procedure and field-tests to assess photovoltaic module performance", <i>Energy</i> , 2014
Publication | % 1 |
|----|---|-----|
-
- | | | |
|----|--|------|
| 11 | Jen-Cheng Wang, Min-Sheng Liao, Yeun-Chung Lee, Cheng-Yue Liu, Kun-Chang Kuo, Cheng-Ying Chou, Chen-Kang Huang, Joe-Air Jiang. "On enhancing energy harvesting performance of the photovoltaic modules using an automatic cooling system and assessing its economic benefits of mitigating greenhouse effects on the environment", <i>Journal of Power Sources</i> , 2018
Publication | <% 1 |
|----|--|------|
-
- | | | |
|----|---|------|
| 12 | alindas.com
Internet Source | <% 1 |
|----|---|------|
-
- | | | |
|----|---|--|
| 13 | Submitted to University of Northumbria at | |
|----|---|--|

Newcastle

Student Paper

<% 1

14

kitami-it.repo.nii.ac.jp

Internet Source

<% 1

15

Submitted to Universiti Teknologi Malaysia

Student Paper

<% 1

16

scitepress.org

Internet Source

<% 1

17

onlinelibrary.wiley.com

Internet Source

<% 1

18

H. Yoichi, M. Kouichi, H. Saruwatari, K. Shikano. "Interface for barge-in free spoken dialogue system based on sound field control and microphone array", 2003 IEEE International Conference on Acoustics, Speech, and Signal Processing, 2003. Proceedings. (ICASSP '03)., 2003

Publication

<% 1

19

Submitted to Brunel University

Student Paper

<% 1

20

Jun Zeng. "An agent-based approach to renewable energy management in eco-building", 2008 IEEE International Conference on Sustainable Energy Technologies, 11/2008

Publication

<% 1

- | | | |
|----|--|------|
| 21 | dyuthi.cusat.ac.in
Internet Source | <% 1 |
| 22 | Submitted to University of Western Sydney
Student Paper | <% 1 |
| 23 | Y. H. Song. "Modelling, simulation and performance analysis of a PV array in an embedded environment", 2007 42nd International Universities Power Engineering Conference, 09/2007
Publication | <% 1 |
| 24 | A. Hunter Fanney, Brian P. Dougherty, Mark W. Davis. "Comparison of Predicted to Measured Photovoltaic Module Performance", Journal of Solar Energy Engineering, 2009
Publication | <% 1 |
| 25 | profs.hut.ac.ir
Internet Source | <% 1 |
| 26 | Submitted to Universiti Tunku Abdul Rahman
Student Paper | <% 1 |
| 27 | www.ukessays.com
Internet Source | <% 1 |
| 28 | M. Effendy Ya'acob, Hashim Hizam, Myo Than Htay, M. Amran M. Radzi, Tamer Khatib, M. Bakri A. "Calculating electrical and thermal characteristics of multiple PV array | <% 1 |

configurations installed in the tropics", Energy Conversion and Management, 2013

Publication

29

A.A. Kulaksiz. "ANFIS-based parameter estimation of one-diode equivalent circuit model of PV modules", 2011 IEEE 12th International Symposium on Computational Intelligence and Informatics (CINTI), 2011

Publication

30

Takashi Yamada. "Multilevel Transmission System Using Multiple LDs and Block Receiving Technique", IEEE GLOBECOM 2008 - 2008 IEEE Global Telecommunications Conference, 11/2008

Publication

31

Submitted to Masdar Institute of Science and Technology

Student Paper

32

Submitted to Oklahoma State University

Student Paper

33

Al-Messabi, Naji, Yun Li, Ibrahim El-Amin, and Cindy Goh. "Forecasting of photovoltaic power yield using dynamic neural networks", The 2012 International Joint Conference on Neural Networks (IJCNN), 2012.

Publication

Palantei, E., A. Andani, M. Baharuddin, N. K.

<% 1

<% 1

<% 1

<% 1

<% 1

34

Nauman, S. Syarif, M. Anshar, N. Mokobombang, A. Suyuti, and Z. Muslimin. "Internal antennas for digital TV receiver", 2011 IEEE International Symposium on Antennas and Propagation (APSURSI), 2011.

Publication

<% 1

35

P. Sanchis, J. Lopez, A. Ursua, L. Marroyo. "Electronic Controlled Device for the Analysis and Design of Photovoltaic Systems", IEEE Power Electronics Letters, 2005

Publication

<% 1

36

Submitted to University of the West Indies

Student Paper

<% 1

37

Jiang, Joe-Air, Jen-Cheng Wang, Kun-Chang Kuo, Yu-Li Su, Jyh-Cherng Shieh, and Jui-Jen Chou. "Analysis of the junction temperature and thermal characteristics of photovoltaic modules under various operation conditions", Energy, 2012.

Publication

<% 1

38

A. Hunter Faney, Brian P. Dougherty, Mark W. Davis. "A Comparison of Predicted to Measured Photovoltaic Module Performance", ASME 2007 Energy Sustainability Conference, 2007

Publication

<% 1

39

Submitted to University of Newcastle upon Tyne

Student Paper

<% 1

H. Abu-Rub, A. Iqbal, Sk. M. Ahmed. "Adaptive neuro-fuzzy inference system-based maximum power point tracking of solar PV modules for fast varying solar radiations", International Journal of Sustainable Energy, 2012

Publication

EXCLUDE QUOTES ON

EXCLUDE
BIBLIOGRAPHY ON

EXCLUDE MATCHES < 5
WORDS