

# A\_novel\_ohmic- based\_technology\_for\_seaweed \_processing.pdf *by*

---

**Submission date:** 16-Oct-2022 04:39PM (UTC+0700)

**Submission ID:** 1926446468

**File name:** A\_novel\_ohmic-based\_technology\_for\_seaweed\_processing.pdf (304.56K)

**Word count:** 5345

**Character count:** 30188

**A novel ohmic-based technology for seaweed processing**

<sup>1</sup>Hasizah, A., <sup>2</sup>Mahendradatta, M., <sup>2</sup>Laga, A., <sup>3</sup>Metusalach, M., <sup>4</sup>Supratomo,  
<sup>4</sup>Waris, A. and <sup>4\*</sup>Salengke, S.

<sup>1</sup>Graduate School, Hasanuddin University, Makassar 90218 Indonesia

<sup>2</sup>Department of Food Science and Technology, Hasanuddin University, Makassar 90245, Indonesia

<sup>3</sup>Department of Fisheries, Hasanuddin University, Makassar 90245, Indonesia

<sup>4</sup>Department of Agricultural Engineering, Hasanuddin University, Makassar 90245, Indonesia

**14**  
**Article history**

Received: 17 April 2017

Received in revised form:

2 June 2017

Accepted: 8 June 2017

**Keywords**

Seaweed processing  
*Eucheuma spinosum*  
Carrageenan extraction  
Ohmic technology

**1**  
**Abstract**

Carrageenans are important hydrocolloids extracted from red seaweeds (Rhodophyceae) of genus *Eucheuma*, *Iridia*, *Gigartina*, and *Chondrus*. Carrageenan extraction technologies currently applied in modern industries are based on conventional heating using double-jacketed tanks supplied with steam as heating medium. This technology is inefficient in energy use and poses a complicated processing setup since it requires a dedicated steam generator and steam delivery system. The objective of this study was to develop an ohmic-based novel technology for seaweed processing. The system developed and used in this study consisted of three ohmic heating chambers (7.5 liter each) working in parallel in static mode. The system was tested for iota carrageenan extraction from *Eucheuma denticulatum* (known commercially as *Eucheuma spinosum*) using 0.3M KOH solution as extracting medium with seaweed to solution ratio of 1:35 (w/v). The tests were conducted at several temperatures and extraction durations to gain broad insights on the effectiveness of this novel technology. The test results indicated that this technology can efficiently extract carrageenan from *E. spinosum* with yields in the range of 41-61% (dry weight basis) and viscosity and gel strength in the range of 269-274 cP and 50.87-55.27 g/cm<sup>2</sup> respectively. These results suggest that ohmic-based seaweed processing technology is a viable alternative to conventional technologies currently applied in industries.

© All Rights Reserved

**Introduction**

Carrageenans, agar-agar, and alginate are phycocolloid found in several classes of seaweeds. Carrageenans and agar-agar are commonly found in red-algae of the classes Rhodophyceae and Florideophyceae while alginate is found in brown algae of the class Phaeophyceae. Carrageenans are produced from *Kappaphycus* spp (Santos, 1989; de Ruiter and Rudolph, 1997; Webber *et al.*, 2012; Orbita, 2013; Hernandez-Carmona *et al.*, 2013), *Eucheuma* sp. (Santos, 1989; de Ruiter and Rudolph, 1997; Viana *et al.*, 2004; Freile-Pelegrin *et al.*, 2006; Hernandez-Carmona *et al.*, 2013; Villanueva and Montano, 2014), *Hypnea* spp (Ramalingam *et al.*, 2003; Mtolera and Buriyo, 2004; Diaz *et al.*, 2010; Al-Alawi, 2011; Arman and Qader, 2012; de Oliveira Farias, 2014) and *Chondrus* spp. (Mathieson and Tvester, 1975; de Ruiter and Rudolph, 1997; Bixler and Porse, 2011; Hernandez-Carmona *et al.*, 2013). Agar-agar is produced from red seaweeds of genus *Gelidium*, *Gelidiella*, *Pterocladia*, and *Gracilaria* (Doty and Santos, 1975; Hurtado-Ponce, 1992a, 1992b; Bixler and Porse, 2011; Hernandez-

Carmona *et al.*, 2013; Croce *et al.*, 2015) and alginates are mostly produced from *Laminaria* spp., *Macrocystis pyrifera*, *Ascophyllum nodosum*, *Sargassum*, *Ecklonia*, and *Lessonia* (Bixler and Porse, 2011; Hernandez-Carmona *et al.*, 2013). Many of these commercially important seaweeds have been successfully cultivated.

Global production of cultivated seaweeds exceeded 23 million tons in 2012 with an estimated value of approximately 6.37 billion USD (FAO, 2014). Statistical data reported by FAO (2014) also indicated that the main producers of cultivated seaweeds were Asian countries (99.18%) led by China (12.83 million mt), Indonesia (6.51 million mt), and the Philippines (1.75 million mt). Indonesia and other countries in the coral triangle region produced mostly *Kappaphycus*, *Eucheuma*, and *Gracilaria* while other types were produced in smaller quantities (Hurtado *et al.*, 2014).

Carrageenan producing seaweeds (carrageenophytes) can be processed into semi-refined carrageenan (SRC) via alkalization and refined carrageenan (RC) through extraction. These processes are generally done in alkali solutions such

\*Corresponding author.  
Email: [salengke@unhas.ac.id](mailto:salengke@unhas.ac.id)

as KOH and NaOH. Heating of seaweeds in alkali solution causes imbibitions of the alkali solution into the seaweed which can modify the properties of carrageenans contained in the processed seaweed through desulfation.

In the mid 1970s, processing carrageenan containing seaweeds without extracting the carrageenan from the seaweed was started in the Philippines (Bixler and Porse, 2010). Since then, this processing method has been gaining popularity due to the fact that it is much lower in production costs since energy consumption is lower and no precipitation is required in the production process. This processing method is done by heating the seaweeds in relatively higher alkali concentration (8 – 12% KOH solution) and at temperature below 80°C (below melting temperature of the carrageenan) such that the carrageenans remain in the seaweed. The use of lower temperature in this process is intended to lower carrageenan loss which can occur due to leaching of the carrageenans into the heating solution. Following the alkalization process, the seaweeds are coarsely chopped, dried, and grinded. This process is generally used for processing of *Kappaphycus alvarezii* and the product produced from this process is referred to as semi refined carrageenan (SRC), processed eucheuma seaweed (PES), Philippines Natural Grade (PNG), alkali treated cottonii (ATC), or alkali modified flour (AMF).

Prior to the introduction of the semi refined process indicated previously, carrageenan production through extraction was the only processing method employed in seaweed processing industries. This processing method is done by heating seaweeds containing carrageenan at temperatures above 90°C (above the melting temperature of the carrageenans). Heating at this high temperature can effectively disintegrate the seaweed structure and extract the carrageenan out of the cell wall and cell matrices. To recover the carrageenan from the solution, subsequent processes which include filtration, precipitation in alcohol or KCl solution (for kappa carrageenan), drying, and grinding are generally done. The carrageenan obtained from this whole process is commonly known as refined carrageenan (RC).

The chemical process involved in the modification of carrageenan properties and extraction of carrageenan from seaweeds is relatively simple (McHugh, 2002). However, as McHugh (2002) pointed out, technological and engineering aspects of the processing technology are quite complex, especially for RC production.

Many studies reported in literature have attempted to elucidate the factors that affect yield

and quality of carrageenans produced from the alkalization and extraction processes. Extraction of kappa carrageenan and kappa-iota hybrid has been studied by Ohno *et al.* (1994, 1996), Hoffmann *et al.* (1995), Rideout and Bernice (1998), Normah and Nazarifah (2003), Munoz *et al.* (2004), Tuvikene *et al.* (2006), Montolalu *et al.* (2008), Bono *et al.* (2014) and Webber *et al.* (2012). Studies on extraction of iota carrageenan from different types of seaweeds have also been reported (Istini *et al.*, 1994; Viana *et al.*, 2004; Villanueva *et al.*, 2004; Araujo *et al.*, 2012). In all of the aforementioned studies, the extraction process were conducted using conventional heating method, i.e. heating of seaweeds and extracting medium on a stove or a hot plate.

Productions of carrageenan, agar, and alginate in seaweed processing industries are generally done by heating the processed seaweeds in double jacketed tanks supplied with steam as a heating medium. This method of heating requires a dedicated steam generator and steam delivery system such that the processing system can become quite complex. In this study, an innovative technology based on ohmic heating phenomenon was developed for seaweed processing. This technology can be used for the semi refined process (alkalization process) and for extraction of carrageenan, agar-agar, and alginate from various types of seaweeds.

Ohmic heating is an internal heat generation due to the resistance of a material to electric current flow. The concept of heating due to the passage of electric current through an electrically conducting material has been known since James Prescott Joule (1818-1889) introduced it in 1840 (Sastry *et al.*, 2002). Therefore, the phenomenon of internal heat generation in a material due to dissipation of electrical energy into heat is known as Joule heating or ohmic heating.

In the area of food processing, ohmic heating is generally defined as a process whereby heat is generated internally within food materials (liquids, solids, or a mixture of both) due to the passage of electric current through the food materials. This internal heat generation is caused by the electrical resistance of the food materials (Sastry and Barach, 2000). The amount of heat generated internally within the food material is directly related to the electrical conductivity of the processed food and the density of electric current generated by the applied electric field.

The internal heat generation during ohmic heating can be used to heat food materials up to the desired temperatures (Saleri and Sastry, 2005; 2007a, 2007b). In addition, ohmic heating has been found to

provide rapid and uniform heating of food materials provided that they have uniform and moderate to high electrical conductivities (Salengke and Sastry, 2007b;2007c). Therefore, ohmic heating technology can be used effectively in food processing operations requiring rapid and uniform heating.

Ohmic heating process can be very efficient in energy use since all of the electric energy consumed in the process can be converted into heat. This heating method has been used in many food processing operations and one potential application that needs to be explored is the use of ohmic technology in seaweed processing. This heating method can be applied in alkalization of seaweed to produce semi-refined carrageenan [17] in extraction of important food hydrocolloids such as carrageenan, agar, and alginate from seaweeds. This is due to the fact that these processes are typically done in KOH or NaOH solutions which have high electrical conductivities. Under such condition, rapid and uniform heating can be achieved via ohmic heating process. Therefore, the objectives of this study were to develop a new and innovative technology for seaweed processing based on ohmic heating and to examine the performance of this technology for heating of KOH solution and extraction of carrageenan from *Eucheuma spinosum*.

## Materials and Methods

The ohmic heating system developed in this study consisted of three main components, i.e. ohmic heating chamber, electric supply and control system, and data acquisition system. The ohmic heating chamber was made of a PVC pipe [25] internal diameter 10.25 cm and length of 100 cm). Stainless steel electrodes were secured at [36] both ends of the PVC pipe to supply electric current to the ohmic heating chamber. The supply of electric current to the electrodes was controlled by a thermocontroller. Current, voltage, and [23] temperature data were measured every second and recorded using a data logger (Campbell Scientific CR1000, Logan, Utah, USA). [12] Current and voltage data were used to calculate the electrical conductivity of the solution within the ohmic heating chamber and power consumption during heating.

### Testing of the ohmic heating system

The technology developed was first tested for heating of alkali solutions without seaweeds to assess the heating rate, electrical conductivities of the solutions, and electrical energy consumed during heating. The electrical conductivities of KOH solutions (0.3, 0.6, and 0.9 M) during ohmic heating were determined using Equation 1.

$$\sigma = \frac{I \cdot L}{V \cdot A} \quad (1)$$

In the above equation,  $\sigma$  represents [16] electrical conductivity (S/m) of KOH solutions during ohmic heating,  $I$  is the amount of current (Amps) which passed through the ohmic heating chamber,  $V$  and [2] are voltage difference (Volt) and distance (m) between the two electrodes, and  $A$  is the cross section area ( $m^2$ ) of the ohmic heating chamber.

Another important aspect that needs to be measured during ohmic heating is power consumption. Electric power consumption during ohmic heating ( $P$ ) can be calculated using Equation 2. In this equation,  $t$  represents time interval between measurements in second. The efficiency of electric [4] energy usage during ohmic heating is high since all of the electric energy is converted into heat. In this study, the efficiency of electrical energy consumption was estimated based on the amount of electrical energy consumed during heating (Equation 2) and the theoretical energy required to heat KOH solution,  $Q$ , (Equation 3). The energy efficiency was then calculated using Equation 4.

$$P = I \cdot V \cdot t \quad (2)$$

$$Q = m \cdot cp \cdot \Delta T \quad (3)$$

$$\eta = \frac{Q}{P} \times 100\% \quad (4)$$

### Carrageenan extraction

The technology developed was tested for extraction of carrageenans from *Eucheuma spinosum* (contains mostly iota carrageenan). Dry seaweeds (moisture content 30 – 35%) were obtained from seaweed farmers in South Sulawesi, Indonesia. The seaweeds were first cleaned from sands and salts and then rinsed with tap water to thoroughly clean the seaweeds. Thereafter, the seaweeds were sun dried to about 10% moisture content. Seaweed samples for extraction were prepared by weighing the dry seaweeds to predetermine [30] weights and placed in sealable plastic bags and stored at room temperature. The samples were soaked in tap water for 30 minutes before extraction.

Extractions were conducted at three temperatures (85, 90, and 95°C) and three durations (120, 180, and 240 minutes). Extractions were conducted using 7.5 litre ohmic heating chambers. KOH concentration was maintained at 0.3M and the ratio between the seaweed and KOH solution was 1:35 (w/v). After extraction process, the solution was filtered using cheese clothes to separate solid residues from the

extracting medium.

The extracted carrageenan contained in the solution was recovered through a precipitation process using 90% isopropyl alcohol. The carrageenan containing solution was added slowly into the alcohol while stirring to avoid formation of large lumps of the precipitated carrageenan. The final ratio between the alcohol and the solution was 2:1. The mixing was continued for 30 minutes after all of the solution was added into the alcohol to allow the carrageenan in the solution to precipitate completely. After that, the carrageenan was recovered by filtration using cheese cloths and cut into small pieces before drying. The drying was done via sun drying to moisture content of about 12%.

Carrageenan yields were calculated as the ratio between the weights of the carrageenan produced (at 12% moisture content) and the dry weight of the seaweed processed. The quality of the carrageenan was determined based on solution viscosity and gel strength. Carrageenan solutions were prepared by dissolving 6 g of carrageenan into a glass beaker containing 400 ml water (1.5% carrageenan solution). The opening of the beaker was sealed using aluminum foil and the solution was heated on a hot plate while stirring using a magnetic stick until all of the carrageenan dissolved. The glass beaker was then inserted into a water bath maintained at 75°C. After the solution temperature stabilized at 75°C, the beaker was transferred to a viscometer (Brookfield Engineering, Middleboro, Massachusetts, US) for viscosity measurement. After the viscosity measurement, the carrageenan solution was recovered and cooled to room temperature in 200 ml beakers to form gel. The temperature of the gel was allowed to stabilize at room temperature for at least two hours before gel strength measurement was conducted. Gel strength of the carrageenan samples (expressed as Bloom value) was measured using a texture analyzer (Stable Micro Systems, Surrey, UK) equipped with Bloom test apparatus.

## Results and Discussion

### Heating rate, electrical conductivity, and energy consumption

Alkali solutions such as KOH and NaOH are commonly used in seaweed processing to increase the gel strength of carrageenans contained in the processed seaweed. These solutions have relatively high electrical conductivity at low concentrations (<1M) such that their ohmic heating rates are high. Data shown in Figure 1 reveal that ohmic heating rates of dilute KOH solutions (concentration 0.3 –

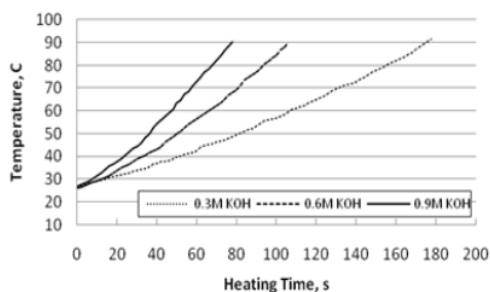


Figure 1. Ohmic heating rate of dilute KOH solution.

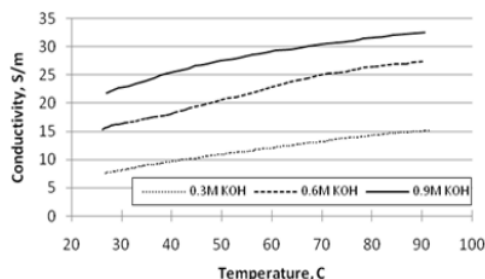


Figure 2. Electrical conductivity of dilute KOH solutions.

0.9M) were relatively high. The typical processing temperatures used in carrageenan, agar, and alginate production can be reached within three minutes of heating using low concentration of alkali. At higher alkali concentrations such as those typically used in SRC production, the time of heating required to reach processing temperature will be much less. It is also important to note that voltage gradient inside the heating chamber was low; around 4.13 V/cm at the start of heating and down to 3.65 V/cm at the end of heating. This was due to the significant increase in current flow through the ohmic heating chamber as temperature, and thus electrical conductivity, of solution inside the ohmic heating chamber increased. The fast heating obtained from this study clearly indicates that ohmic based technology can be a viable technology for seaweed processing.

Electrical conductivity of dilute KOH solutions is highly dependent on concentration and temperature. The electrical conductivities of KOH solutions at concentrations of 0.3, 0.6, and 0.9M were about 8.15, 16.36, and 22.78 S/m respectively at 30°C, and 15.09, 27.30, and 32.61 S/m respectively at 90°C (Figure 2). These results are in accordance with the trend reported by Kortum (1965) which indicated that the electrical conductivities of electrolytes increase with the increase in temperature. Results of studies reported by Guanti and Moran (1986), See and White (1997), and Gilliam *et al.* (2007) showed that electrical conductivities of KOH solutions at high

concentrations increase linearly with temperature. Therefore, it is expected that the electrical conductivity of dilute (<1M) KOH solution used in this study during ohmic heating is linearly dependent on temperature as well.

The results of measurements shown in Figure 2 indicate that the curves for the relationship between electrical conductivity and temperature are slightly concave but the electrical conductivity values can still be approximated adequately using linear equations with  $R^2$  values greater than 0.96. The slightly concave electrical conductivity curves observed in this study might indicate distortions to current flow due to bubbles and gas formations (most likely from the electrode surface). Nonetheless, the electrical conductivity values found from this study were close to the calculated values reported by Gilliam *et al.* (2007). It is important to note that unlike the methods used by several researchers (Guanti and Moran, 1986; See and White, 1997; Gilliam *et al.*, 2007), the electrical conductivities of KOH solutions found in this study were determined by continuously measuring the amount of current flows and voltage different between the two electrodes inside the heating chamber during ohmic heating.

Total cumulative energy consumptions during ohmic heating of 4.35 kg of KOH solutions from 26 to 90°C as computed using Equation 2 were 390.19, 385.67, and 352.07 Watt-hour for 0.3 M, 0.6 M, and 0.9 M KOH solution respectively. The difference in the cumulative energy consumption was mainly due to the difference in the duration of heating time required to reach the final temperature of 90°C as shown in Figure 1. The amount of heat loss from the ohmic heating chamber to the surrounding is expected to be higher as the heating duration increases. The efficiencies of electric energy usage for ohmic heating of KOH solutions were 82.96, 83.93, and 91.94% for 0.3 M, 0.6 M, and 0.9 M solution respectively. It is important to note that the ohmic heating chamber used during measurements was not thermally insulated such that the energy loss to the surrounding was considerable. Therefore, in subsequent extraction experiments, the heating chamber was thermally insulated with glass wool to reduce heat loss during extraction.

#### Carrageenan yields

Carrageenan yields from various extraction conditions as shown in Figure 3 indicate that average yields varied from 46 to 69% (at 12% moisture content) or equivalent to 41-61% (dry weight basis). These values are in accordance with average yield of 57.9% reported by Dawes *et al.* (1977), 44-

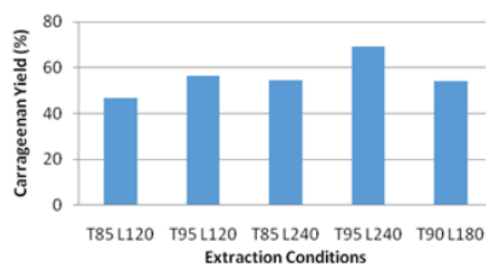


Figure 3. Carrageenan yields from extraction of carrageenan from *E. spinosum*. T=extraction temperature (C), L = extraction duration (minute).

59% reported by Buriyo *et al.* (2001), 53 and 56% reported by Vairappan *et al.* (2003), 56.6% reported by Wakibia *et al.* (2006), and 43.5 – 57.2% reported by Freile-Pelegrin and Robledo (2008). These results clearly indicate that the use of ohmic heating technology in extraction of carrageenan, agar, and alginate from seaweeds is promising. This is due to the fact that besides the desired rapid heating as shown previously; ohmic heating can also provide additional effects such as cell wall electrophoresis, tissue disintegrations as alluded previously by Lima and Sastry (1999), Wang and Sastry (2002), and Salengke and Sastry (2005).

The results obtained from this study clearly indicate that ohmic heating technology has great potentials in seaweed processing. This novel seaweed processing technology can provide not only higher extraction yield but also higher energy efficiency since heat is generated internally by the processed materials. The quality of carrageenan produce from this extraction method is good based on the viscosity value. The viscosity of 1.5 % carrageenan solution at 75°C ranged from 269.15 to 274.34 cP (Figure 4). These values are higher than the values reported from the study by Vairappan *et al.* (2003) which indicated average viscosity of 250 – 254 cP and the maximum viscosity of 161.3 cP and 144.6 cP reported by Freile-Pelegrin *et al.* (2006) and Freile-Pelegrin and Robledo (2008) respectively for iota carrageenan extracted from *Euclima isiforme*. The gel strengths of the carrageenan extracted from *Euclima spinosum* at 1.5% carrageenan concentration ranged from 64.41 – 69.98 Bloom (Figure 5) or equivalent to 50.87 – 55.27 g/cm<sup>2</sup>. These values are slightly higher than the values (< 50 g/cm<sup>2</sup>) reported by Freile-Pelegrin *et al.* (2006, 2007). However, the gel strengths found in this study were considerably lower than the values reported by Vairappan *et al.* (2003) for carrageenan extracted from *Euclima spinosum*. The data reported by these authors indicated that the gel strengths varied greatly during the year where maximum gel strength

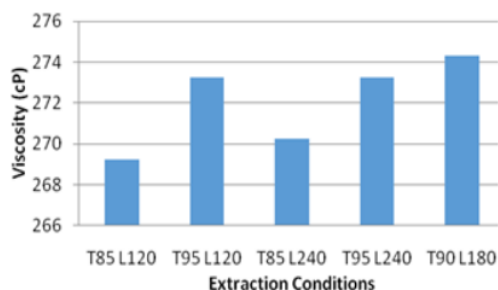


Figure 4. Viscosity of carrageenan extracted from *E. spinosum*

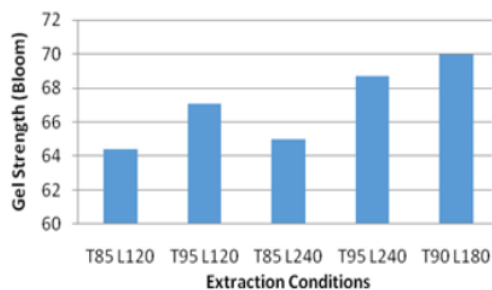


Figure 5. Gel strength of carrageenan extracted from *E. spinosum*.

of 290 g/cm<sup>2</sup> was achieved in November and about 120 – 140 g/cm<sup>2</sup> in other months. It is important to note also that the gel strengths reported by Vairappan *et al.* (2003) was for gels containing 3% carrageenan.

The overall results of this study indicate that ohmic-based seaweed processing technology is a viable alternative to conventional technologies currently applied in seaweed processing industries. Extraction yields and viscosity of the carrageenan produced are high. However, further studies using pilot or industrial scale prototypes and other types of seaweeds are necessary to be able to fully evaluate this novel technology. In addition, processing parameters need to be optimized to improve yields and properties (viscosity and gel strength) of the carrageenan produced.

## Conclusion

An ohmic-based technology for seaweed processing has been successfully developed and tested for extraction of carrageenan from *Eucheuma spinosum*. The overall results indicate that ohmic-based seaweed processing technology is a viable alternative to conventional technologies currently applied in seaweed processing industries. Extraction yields and viscosity of the carrageenan produced are

high but further testing and optimization of processing parameters need to be done to be able to fully evaluate the performance of this new technology.

## Acknowledgements

The authors acknowledge financial support from Ministry of Research, Technology, and Higher Education, Republic of Indonesia. Salary and research support is provided by Hasanuddin University. Mention of commercial brands is done with the understanding that no endorsement by Hasanuddin University is implied.

## References

- Al-Alawi, A.A., Al-Marhubi, I. M. and Al-Belushi, M.S.M. 2011. Characterization of Carrageenan Extracted from *Hypnea bryoides* in Oman. *Marine Biotechnology* 13(5): 893-899.
- Araújo, I.W.F., Rodrigues, J.A.G., Vanderlei, E.S.O., de Paula, G.A., Lima, T.B. and Benevides, N.M.B. 2012. Iota-carrageenans from *Solieria filiformis* (Rhodophyta) and their effects in the inflammation and coagulation. *Acta Scientiarum Technology* 34(2): 127-135.
- Arman, M. and Qader, S.A.U. 2012. Structural analysis of kappa-carrageenan isolated from *Hypnea musciformis* (red algae) and evaluation as an elicitor of plant defense mechanism. *Carbohydrate Polymers* 88(4): 1264–1271.
- Bixler, H.J. and Porse, H. 2011. A decade of change in the seaweed hydrocolloids industry. *Journal of Applied Phycology* 23(3):321–335.
- Bono, A., Anisuzzaman, S.M. and Ding, O.W. 2014. Effect of process conditions on the gel viscosity and gel strength of semi-refined carrageenan (SRC) produced from seaweed (*Kappaphycus alvarezii*). *Journal of King Saud University – Engineering Sciences* 26(1): 3–9.
- Buriyo, A.S., Semesi, A.K. and Mtolera, M.S.P. 2001. The effect of seasons on yield and quality of carrageenan from Tanzanian red alga *Eucheuma denticulatum* (Gigartinales, Rhodophyta). *South African Journal of Botany* 67(3): 488–491.
- Croce, M.E., Villar, M.A. and Parodi, E.R. 2015. Assessment of alternative sources of seaweed polysaccharides in Argentina: potentials of the agarophyte *Gelidium crinale* (Hare ex Turner) Gaillon (Rhodophyta, Gelidiales). *Journal of Applied Phycology* 27(5): 2099-2110.
- Dawes, C.J., Stanley, N. F. and Stancioff, D.J. 1977. Seasonal and reproductive aspects of plant chemistry and iota carrageenan from Floridian *Eucheuma* (Rhodophyta, Gigartinales). *Botanica Marina* 20(3):137-147.
- de Oliveira Farias, E.A. 2014. Yield prospection of carrageenan extracted from *hypnea musciformis*

- seaweed collected on the Coqueiro Beach, Piauí State, submitted to four previous treatments. *Demetra* 9(4): 1019-1025.
- de Ruyter, G.A. and Rudolph, B. 1997. Carrageenan biotechnology. *Trends in Food Science and Technology* 8(12): 389-395.
- Díaz, R.T.A., Chabrilón, M., Cabello-Pasini, A., Gómez-Pinchetti, J.L., and Figueroa, F.L. 2010. Characterization of polysaccharides from *Hypnea spinella* (Gigartinales) and *Halopithys incurva* (Ceramiaceae) and their effect on RAW 264.7 macrophage activity. *Journal of Applied Phycology* 23(3): 523-528.
- Doty, M.S. and Santos, G.A. 1975. Gracilaria for the manufacture of agar. *Fisheries Research Journal of the Philippines* 3(2): 29-34.
- FAO. 2014. *FAO Yearbook 2012: Fishery and Aquaculture Statistics*. Rome: Food and Agriculture Organization of the United Nations.
- Freile-Pelegrin, Y., Robledo, D. and Azamar, J.A. 2006. Carrageenan of *Eucheuma isiforme* (Solieriaceae, Rhodophyta) from Yucatan, Mexico. I. Effect of extraction conditions. *Botanica Marina* 49(1): 65-71.
- Freile-Pelegrin, Y. and Robledo, D. 2008. Carrageenan of *Eucheuma isiforme* (Solieriaceae, Rhodophyta) from Nicaragua. *Journal of Applied Phycology* 20(5): 537-541.
- Gilliam, R.J., Graydon, J.W., Kirk, D.W. and Thorpe, S.J. 2007. A review of specific conductivities of potassium hydroxide solutions for various concentrations and temperatures. *International Journal of Hydrogen Energy* 32(3): 359-364.
- Guanti, R.J. and Moran, P.J. 1986. Measurement of electrolytic conductivity in highly conducting solutions. *Journal of Applied Electrochemistry* 16(5): 678-682.
- Hernandez-Carmona, G., Freile-Pelegrin, Y. and Hernandez-Garibay, E. 2013. Conventional and alternative technologies for the extraction of algal polysaccharides. In H. Dominguez (Ed), *Functional ingredients from algae for foods and nutraceuticals*, p.475-516. Oxford: Woodhead Publishing Ltd.
- Hoffmann, R. A., Gidley, M. J., Cooke, D. and Frith, W. J., 1995. Effect of isolation procedures on the molecular composition and physical properties of *Eucheuma cottonii* carrageenan. *Food Hydrocolloids* 9(4): 281-289.
- Hurtado-Ponce, A.Q. 1992a. Rheological properties of agar from *Gracilariopsis heteroclada* (Zhang et Xia) Zhang et Xia (Gracilariales, Rhodophyta) treated with powdered commercial lime and aqueous alkaline solution. *Botanica Marina* 35(5): 365-369.
- Hurtado-Ponce, A.Q. 1992b. Influence of extraction time on the rheological properties of agar from some Gracilaria species from the Philippines. *Botanica Marina* 35(5): 441-445.
- Hurtado, A.Q., Gerung, G.S., Yasir, S. and Critchley, A.T. 2014. Cultivation of tropical red seaweeds in the BIMP-EAGA region. *Journal of Applied Phycology* 26(2): 707-718.
- Istini, S., Ohno, M. and Kusunose, H. 1994. Methods of Analysis for Agar, Carrageenan and Alginate in Seaweed. *Bulletin of Marine Science and Fishery* No. 14, p.49-55. Kochi University.
- Kortum, G. 1965. *Treatise on Electrochemistry*. New York: Elsevier Publishing Co.
- Lima, M. and Sastry, S.K. 1999. The effects of ohmic heating frequency on hot-air drying rate and juice yield. *Journal of Food Engineering* 41(2): 115-119.
- Mathieson, A.C. and Tvetter, E. 1975. Carrageenan ecology of *Chondrus crispus* stackhouse. *Aquatic Botany* 1(1): 25-43.
- McHugh, D. J. 2002. Prospects for seaweed production in developing countries. *FAO Fisheries Circular* No. 968. Rome: FAO.
- Montolalu, R.I., Tashiro, Y., Matsukawa, S. and Ogawa, H., 2008. Effects of extraction parameters on gel properties of carrageenan from *Kappaphycus alvarezii* (Rhodophyta). *Journal of Applied Phycology* 20(5): 521-526.
- Mtolera, M.S.P. and Buriyo, A.S. 2004. Studies on Tanzanian Hypneaceae: seasonal variation in content and quality of kappa-carrageenan from *Hypnea musciformis* (Gigartinales : Rhodophyta). *Western Indian Ocean Journal of Marine Science* 3(1): 43-49.
- Munoz, J., Freile-Pelegrin, Y. and Robledo, D. 2004. Mariculture of *Kappaphycus alvarezii* (Rhodophyta, Solieriaceae) color strains in tropical waters of Yucatan, Mexico. *Aquaculture* 239(1-4): 161-177.
- Normah, O. and Nazarifah, I. 2003. Production of semi-refined carrageenan from locally available red seaweed, *Eucheuma cottonii* on a laboratory scale. *Journal of Tropical Agriculture and Food Science* 31(2): 207-213.
- Ohno, M., Largo, D.B. and Ikumoto, T. 1994. Growth rate, carrageenan yield and gel properties of cultured kappa-carrageenan producing red alga *Kappaphycus alvarezii* (Doty) Doty in the subtropical waters of Shikoku, Japan. *Journal of Applied Phycology* 6(1): 1-5.
- Ohno, M., Nang, H. and Hirase, S. 1996. Cultivation, carrageenan yield and quality of *Kappaphycus alvarezii* in the waters of Vietnam. *Journal of Applied Phycology* 8(4-5): 431-437.
- Orbita, M.L.S. 2013. Growth rate and carrageenan yield of *Kappaphycus alvarezii* (Rhodophyta, Gigartinales) cultivated in Kolambagan, Lanao del Norte, Mindanao, Philippines. *Advances in Agriculture and Botany - International Journal of the Bioflux Society* 5(3): 128-139.
- Ramalingam, J. R., Kaliaperumal, N. and Kalimuthu, S. 2003. Commercial scale production of carrageenan from red algae. *Seaweed Resources and Utilization* 25(1-2): 37-46.
- Rideout, C.S. and Bernabe, M.G. 1998. Method for Extracting Semi-Refined Carrageenan from Seaweed. United States Patent 5,801,240.
- Salengke, S. 2000. Electrothermal effects of ohmic heating on biomaterials: Temperature monitoring, heating of

- solid-liquid mixtures, and pretreatment effects on drying rates and oil uptake. Columbus: The Ohio State University, PhD Thesis.
- Salengke, S. and Sastry, S.K. 2005. Effect of ohmic pretreatment on the drying rate of grapes and adsorption isotherm of raisins. *Drying Technology* 23(3):551-564.
- Salengke, S. and Sastry, S.K. 2007a. Effects of ohmic pretreatment on oil uptake of potato slices during frying and subsequent cooling. *Journal of Food Process Engineering* 30(1):1-12.
- Salengke, S. and Sastry, S.K. 2007b. Experimental investigation of ohmic heating of solid-liquid mixtures under worst-case heating scenarios. *Journal of Food Engineering* 83(3):324-336.
- Salengke, S. and Sastry, S.K. 2007c. Models for ohmic heating of solid-liquid mixtures under worst-case heating scenarios. *Journal of Food Engineering* 83(3):337-355.
- Salengke, S., Supratomo, and Waris, A. 2014. The use of ohmic heating for seaweed processing. Indonesia: Hasanuddin University, Research Report
- Santos, G.A. 1989. Carrageenans of species of *Eucheuma* J. Agardh and *Kappaphycus* Doty (Solieriaceae, Rhodophyta). *Aquatic Botany* 36(1): 55-67.
- Sastry, S.K. and Barach, J.T. 2000. Ohmic and inductive heating. *Journal of Food Science* 86(8): 42-46.
- Sastry, S.K., Yousef, A., Cho, H-Y., Unal, R., Salengke, S., Wang, W-C., Lima, M., Kulshrestha, S., Wongsanngasri, P. and Sensoy, I. 2002. Ohmic Heating and Moderate Electric Field (MEF) Processing. In Welty-Chanes, J., Barbosa-Canovas, G. V. and Aguilera, J. M. (Eds.), *Engineering and Food for the 21<sup>st</sup> Century*, p. 785-793. Boca Raton: CRC Press.
- See, D.M. and White, R.E. 1997. Temperature and concentration dependence of the specific conductivity of concentrated solutions in potassium hydroxide. *Journal of Chemical Engineering Data* 42(6):1266-1268.
- Tuvikene, R., Truus, K., Vaher, M., Kailas, T., Martin, G. and Kersen, P. 2006. Extraction and quantification of hybrid carrageenans from the biomass of the red algae *Furcellaria lumbricalis* and *Coccotylus truncatus*. *Proceedings of Estonian Academy of Science* 55(1): 40-53.
- Vairappan, C.S., Han, T.K. and Razalie, R. 2003. Seasonal fluctuations in carrageenan yield in *Eucheuma spinosum* cultural in coastal areas of Pulau Balambangan, Kudat, Sabah. *Borneo Science* 14(1): 55-61.
- Viana, A.G., Nosedá, M.D., Duarte, M.E.R. and Cerezo, A.S. 2004. Alkali modification of carrageenans. Part V. The iota- $\nu$  hybrid carrageenan from *Eucheuma denticulatum* and its cyclization to iota-carrageenan. *Carbohydrate Polymers* 58(4): 455-460.
- Villanueva, R.D. and Montañó, M.N.E. 2014. Enhancement of carrageenan gel quality in the commercially important tropical seaweed *Eucheuma denticulatum* (Rhodophyta), with postharvest treatment in low-nutrient conditions. *Botanica Marina* 57(3): 217-223.

# A\_novel\_ohmic-based\_technology\_for\_seaweed\_processing.pdf

## ORIGINALITY REPORT

19%

SIMILARITY INDEX

13%

INTERNET SOURCES

14%

PUBLICATIONS

3%

STUDENT PAPERS

## PRIMARY SOURCES

1	<a href="http://www.omicsonline.org">www.omicsonline.org</a> Internet Source	2%
2	<a href="http://fr.scribd.com">fr.scribd.com</a> Internet Source	1%
3	Submitted to Sriwijaya University Student Paper	1%
4	<a href="http://ndl.ethernet.edu.et">ndl.ethernet.edu.et</a> Internet Source	1%
5	Bashir Nouroallahi Soghani, Mohsen Azadbakht, Hosain Darvishi. "Ohmic blanching of white mushroom and its pretreatment during microwave drying", Heat and Mass Transfer, 2018 Publication	1%
6	<a href="http://link.springer.com">link.springer.com</a> Internet Source	1%
7	<a href="http://www.ncbi.nlm.nih.gov">www.ncbi.nlm.nih.gov</a> Internet Source	<1%

8	"Encyclopedia of Marine Biotechnology", Wiley, 2020 Publication	<1 %
9	Ololade Olatunji. "Aquatic Biopolymers", Springer Science and Business Media LLC, 2020 Publication	<1 %
10	d-nb.info Internet Source	<1 %
11	tai-team.fr Internet Source	<1 %
12	journalarticle.ukm.my Internet Source	<1 %
13	www.scribd.com Internet Source	<1 %
14	www.elixirpublishers.com Internet Source	<1 %
15	"Recent Advances in Micro and Macroalgal Processing", Wiley, 2021 Publication	<1 %
16	Li, Fa-De, and Lu Zhang. "Ohmic Heating in Food Processing", Contemporary Food Engineering, 2010. Publication	<1 %
17	Submitted to UCSI University Student Paper	<1 %

---

18

Submitted to Universitas Muhammadiyah  
Surakarta

Student Paper

<1 %

---

19

repos.ust.edu.sd:8080

Internet Source

<1 %

---

20

"Thermal Food Engineering Operations",  
Wiley, 2022

Publication

<1 %

---

21

mafiadoc.com

Internet Source

<1 %

---

22

Alberic De Coster, Sebastien Lambot. "Fusion  
of Multifrequency GPR Data Freed From  
Antenna Effects", IEEE Journal of Selected  
Topics in Applied Earth Observations and  
Remote Sensing, 2018

Publication

<1 %

---

23

www.ohiolink.edu

Internet Source

<1 %

---

24

Charles Santhanaraju Vairappan, Rosnita  
Razalie, Ummul Mardiah Elias, Tulasiramanan  
Ramachandram. "Effects of improved post-  
harvest handling on the chemical constituents  
and quality of carrageenan in red alga,  
Kappaphycus alvarezii Doty", Journal of  
Applied Phycology, 2013

Publication

<1 %

---

25 FILIZ ICIER. "ELECTRICAL CONDUCTIVITY of APPLE and SOURCHERRY JUICE CONCENTRATES DURING OHMIC HEATING", Journal of Food Process Engineering, 8/2004  
Publication

---

26 R. Tuvikene. "Carrageenans", Elsevier BV, 2021  
Publication

---

27 Tanja Kakko, Ella Aitta, Oskar Laaksonen, Pasi Tolvanen, Lauri Jokela, Tapio Salmi, Annelie Damerau, Baoru Yang. "Baltic herring (Clupea harengus membras) protein isolate produced using the pH-shift process and its application in food models", Food Research International, 2022  
Publication

---

28 [www.scielo.br](http://www.scielo.br)  
Internet Source

---

29 "Marine Algae Extracts", Wiley, 2015  
Publication

---

30 "Ultraviolet Radiation Assisted with Ohmic Current for Microbial Inactivation in Apple Juice", Transactions of the ASABE, 2013.  
Publication

---

31 Nimratbir Kaur, A. K. Singh. "Ohmic Heating: Concept and Applications—A Review", Critical Reviews in Food Science and Nutrition, 2015

32

Sarang, S.. "Electrical conductivity of fruits and meats during ohmic heating", Journal of Food Engineering, 200808

Publication

<1 %

33

Villanueva, R.. "Structure and functional performance of gigartinacean kappa-iota hybrid carrageenan and solieriacean kappa-iota carrageenan blends", Food Hydrocolloids, 200403

Publication

<1 %

34

dokumen.pub

Internet Source

<1 %

35

"Handbook of Marine Macroalgae", Wiley, 2011

Publication

<1 %

36

Daniela Bermudez-Aguirre. "Technological Hurdles and Research Pathways on Emerging Technologies for Food Preservation", Elsevier BV, 2018

Publication

<1 %

37

Fifteenth International Seaweed Symposium, 1996.

Publication

<1 %

38

Laura Acosta-Domínguez, Yolanda Cocotle-Ronzón, Liliana Alamilla-Beltrán, Eliseo Hernandez-Martinez. "Effect of a cryogenic

<1 %

treatment in the microstructure, functional and flow properties of soy protein isolate", *Food Hydrocolloids*, 2021

Publication

39

Nguyen, Loc T., Won Choi, Seung Hyun Lee, and Soojin Jun. "Exploring the heating patterns of multiphase foods in a continuous flow, simultaneous microwave and ohmic combination heater", *Journal of Food Engineering*, 2013.

Publication

<1 %

40

[coek.info](http://coek.info)

Internet Source

<1 %

41

[documents.mx](http://documents.mx)

Internet Source

<1 %

42

[dspace.nwu.ac.za](http://dspace.nwu.ac.za)

Internet Source

<1 %

43

[worldwidescience.org](http://worldwidescience.org)

Internet Source

<1 %

44

[www.bioflux.com.ro](http://www.bioflux.com.ro)

Internet Source

<1 %

45

[www.researchgate.net](http://www.researchgate.net)

Internet Source

<1 %

46

"Tropical Seaweed Farming Trends, Problems and Opportunities", Springer Science and Business Media LLC, 2017

<1 %

47

"Handbook of Food Process Design", Wiley, 2012

Publication

---

<1 %

48

Akbar Iskandar, Haerani Rasyid, Syakib Bakri, Hasyim Kasim, Andi Makbul Aman, Femy Syahriani, Nu'man AS Daud, Arifin Seweng. "Proportions of hyperphosphatemia in different stages of chronic kidney disease", Journal of Renal Injury Prevention, 2022

Publication

---

<1 %

49

Andarini Diharmi, Dedi Fardiaz, Nuri Andarwulan, Endang S. Heruwati. " Chemical and physical characteristics of carrageenan extracted from harvested from three different Indonesian coastal sea regions ", Phycological Research, 2017

Publication

---

<1 %

50

Hahn, Thomas, Svenja Kelly, Kai Muffier, Nils Tippkötter, and Roland Ulber. "Extraction of Lignocellulose and Algae for the Production of Bulk and Fine Chemicals", Industrial Scale Natural Products Extraction BART NAT PROD EXTRACTION O-BK, 2011.

Publication

---

<1 %

51

L.P. Gomez, C. Alvarez, M. Zhao, U. Tiwari, J. Curtin, M. Garcia-Vaquero, B.K. Tiwari. "Innovative processing strategies and

<1 %

technologies to obtain hydrocolloids from  
macroalgae for food applications",  
Carbohydrate Polymers, 2020

Publication

---

---

Exclude quotes      On

Exclude matches      < 5 words

Exclude bibliography      On