

Piarah_et_al._2019_- REVISED5.pdf

by

FILE	PIARAH_ET_AL._2019_-REVISED5.PDF (1.37M)		
TIME SUBMITTED	29-NOV-2019 07:52PM (UTC+0700)	WORD COUNT	4836
SUBMISSION ID	1223584644	CHARACTER COUNT	24019

17 A New Simulation of Photovoltaic and Thermoelectric Generator Hybrid System with a Beam Splitter Cold and Hot Mirror for Low Intensity

Wahyu H. Piarah¹, Zuryati Djafar¹, Hariyanto², Mustofa³

16 **Abstract** – In this study, the simulation of Photovoltaic (PV) and Thermoelectric Generator (TEG) hybrid was developed using a spectrum splitter. The simulation was carried out by using the AM1.5G solar spectrum as a standard for 1 Sun, with a variation of 0.05, 0.1, 0.25, 0.50, and 0.7 Suns. The light spectrum was concentrated by using a Fresnel lens and then transmitted to a spectrum splitter. Spectrum splitter that was used is a hot and cold mirror with dimensions of 50 x 50 mm, which is positioned at the angle of 45° from the Fresnel lens's direction. Additionally, PV used is a type amorphous Silicon (a-Si) and TEG types of Bismuth telluride (Bi₂Te₃). The simulation result shows that by using a cold mirror, the maximum total power is better than a hot mirror. Also, the Suns and temperature changes have a significant effect on the output power and efficiency of the hybrid. Particularly at 0.7 suns, 25°C PV temperature, and 55°C hot-side temperature of TEG, the power obtained was 0.096 W/m², and the efficiency was 50.37% compared to the hot mirror, which is relatively lower, accounted for 0.094 W/m² and 48.07%.

Keywords: Light spectrum, photovoltaic, thermoelectric generator, output power, efficiency

1 Nomenclature

PV	Photovoltaic
TEG	Thermoelectric
I-V	Current-Voltage
P-V	Power- Voltage
E_{PV}	Energy passed to PV
E_{TEG}	Energy passed to TEG
F	Spectral Irradiance
λ	Wavelength
I_{ph}	Photocurrent (A)
I_s	diode current (A)
I_{rs}	resistance current (A)
I_{sc}	Short circuit current (A)
I_{pv}	output current PV module (A)
I_{mp}	maximum power current (A)
V_{pv}	output voltage PV module (V)
V_{mp}	maximum power voltage (V)
VOC	voltage open circuit (V)
R_s	series resistance (Ω)
r	shunt resistance (Ω)
q	electron charge (1.602×10^{-19} C)
k	Constant Boltzman (1.38×10^{-23} J)
T	PV temperature (Kelvin)
N_s	number of series cells in the module
N_p	number of parallel cells in the module
Eg	energy gap (1.65)
A	ideality factor = 1
A_{pv}	Surface area PV modules (m ²)
Q_h	heat absorbed
Q_c	heat released
T_H	Temperature Hot side
T_C	Temperature Cold side
α	Seebeck coefficient
κ	Thermal conductivity
R	resistance

I. Introduction

The photon energy is part of the total energy emitted by the sun, which arrives on the Earth. Sunshine in the shape of the electromagnetic wave spectrum can be divided according to its wavelength. Visible light has a wavelength range of 400-700 nm and suitable for the needs of photovoltaic cells (PV) to generate electrical energy [1]. Photons energy absorbed by the PV cells from the solar radiation beam dramatically affects the output power [2]. Various developed methods have been done to improve the energy conversion efficiency in PV, starting from using air and liquid media as a cooler, as well as combining it with the thermoelectric generator (TEG) [3–5]. TEG is a technological device that can convert thermal energy into electrical energy based on the Seebeck effect. Heat potential of the solar spectrum at wavelengths above > 700 nm, which is not absorbed by the PV can be used by TEG [6]. The development of a PV-TEG hybrid system to improve efficiency is increasingly popular and has been carried out in two major models of PV-TEG hybrid, both experimental and theoretical [7–9]. Vorobiev et al. [10] conducted an experiment and simulation to analyze the power and efficiency of the PV-TEG hybrid system, within the simulation of the software used in COMSOL Multiphysics 4.4 software (COMSOL Inc. MA, USA). In their research design, the Fresnel lens, which is positioned next to PV, was used to focus the light on TEG. TEG modules were attached below a black painted

aluminum plate and mounted on a water-cooled heat sink. Inside the heat sink, fluid circulated thermosiphon.

The results showed that the efficiency of TEG is 2.5 - 3.5%, while the efficiency of the PV is 10.74%. However, this study had not yet shown TEG hybrid PV systems as an integrated unit. Another way of combination for a more integrated PV-TEG, performed with the light spectrum splitting system. Elsarraj et al. [11] conducted simulations and experiments on PV-TEG hybrid in a laboratory scale by using cold mirror as a splitter of visible light (Vis), ultraviolet (UV) for PV, and infrared (IR) for TEG with some variations in the radiation intensity of 0.5, 0.7 and 1.1 Suns. The results showed that the radiation intensity that produces the best efficiency is at 0.7 Sun. They further illustrated that the effect of using cold mirrors is beneficial on cold PV power production at low intensity ($<700 \text{ W/m}^2$) with an average temperature of 60°C , and the efficiency of TEG is still low due to the low heat absorbed by the module. Mustofa et al. [12] conducted experimental hybrid PV-TEG using a hot mirror as spectrum splitter, which was mounted on the angle of 45° to separate Vis and IR spectrum of artificial suns (xenon, halogen, and incandescent bulbs) used a Fresnel lens to focus. This result only shows the wavelength and radiation on each bulb with an average of 13.85, 15.02, and 29.58 W.nm, which is measured in real-time within 60 minutes, while the amount of power divided into PV and TEG is not described in detail. However, Piarah et al. [13], in their research, described the spectral irradiance of artificial suns, which was quite comprehensive. In their research, a hot and cold mirror as a spectrum splitter for Halogen light was used experimentally. The lowest radiation reference used is around 0.05 Sun, which is a small amount compared to sunlight radiation (1 Sun). Since Elsarraj et al [11] got the best result at 0.7 sun at intervals (0.5, 0.7, 0.8 and 1.1 Sun), this study will stimulate a spectrum of solar radiation with several Sun variations from 0.05 to 0.7 (0.05, 0.1, 0.25, 0.5 and 0.7) as spectrum input. This input spectrum variation is important to get the best intensity in the low lights intensity category by using a light spectrum of bulbs close to the solar spectrum, as in the intensity and spectral irradiance the type of bulb that approaches the solar spectrum from the results of Doolittle's study [14].

Not much research has examined the potential for this low spectrum power, especially in the light intensity category of the bulb, which can function as a source of PV and thermal photon energy for TEGs that are converted into electrical energy. Initial investigations by Piarah et al. [13] with a 50 Watt Halogen bulb had been done. However, only one type of bulb does not provide a general description of the light spectrum of the low-intensity light category. Therefore, this simulation study tries to cover a relatively long interval of low-intensity spectrum from 0.05 to 0.7 sun as mention above. Furthermore, the study of this low spectrum category will later contribute to the characterization of the light

spectrum intensity of the light bulb in the indoor scale category, which not only functions as lighting but can also serve as an input source for the re-conversion of electrical energy.

This simulation study begins by putting the PV-TEG hybrid system using a mathematical model (explained in II.1 and II.2) on MATLAB/SIMULINK and its specifications as input (Table I and II). Hence, the replacing of PV and/or TEG modules is done only by changing the specification of the modules used. The selection of the PV module is adjusted to the input of the radiation spectrum or low light intensity and the TEG specifications to the operating temperatures. Besides the PV and TEG module specifications, also the Fresnel Lens, Hot/Cold Mirror specifications, and the variations of the radiation spectrum from 0.05 to 0.7 Sun are included as input to calculate hybrid output power and efficiency.

II. Materials and Methods

Light propagation from source to PV and TEG is shown in Figure 1. In this simulation, the light spectrum splitters used are Hot Mirror and Cold Mirror type dichroic filter, which split Vis and IR light. These mirrors are placed under the Fresnel lens to form a 45° angle perpendicular to the radiation source and the lens. Hot and Cold mirror spectrum splitter used are TechSpec AOI cold and hot mirror by the dimensions of $50 \times 50 \text{ mm}$ [14], while the PV used is Amplesun 4040 PV commercial Amorphous Silicon (a-Si) thin films [15] and TEG Bismuth Telluride (Bi_2Te_3) types [16]. The light spectrum is concentrated using Fresnel lenses [17] and directed to a hot mirror or cold mirror. The light spectrum that arrives at the hot mirror and the cold mirror will be slotted according to PV and TEG requirements. In the hot mirror, some will be transmitted in the form of Vis to PV, and some others will be reflected in the form of IR to TEG; on the contrary, in the cold mirror, the reflected light is directed to PV and transmitted to TEG.

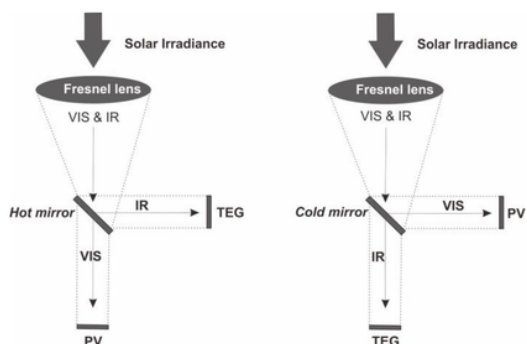


Fig. 1. Scheme of a hybrid PV-TEG system with hot and cold mirror

The light spectrum concentrated by Fresnel lenses is considered to meet the area of hot mirror and cold mirror, while the area of PV and TEG are equally significant. The light energy arriving at hot and cold mirrors can be expressed in the following equation [18]:

$$E_{PV} = \int_{400nm}^{700nm} F(\lambda)d\lambda \quad (1)$$

$$E_{TEG} = \int_{700nm}^{1150nm} F(\lambda)d\lambda \quad (2)$$

E_{PV} is the amount of energy passed to PV; E_{TEG} is the amount of energy passed to TEG, while F is the spectral irradiance, and λ is the wavelength. AM1.5G spectrum data was used as a reference to estimate the spectrum separation value. The power potential with Suns variation (0.05, 0.1, 0.25 0.5 0.7) is shown in Fig 2.

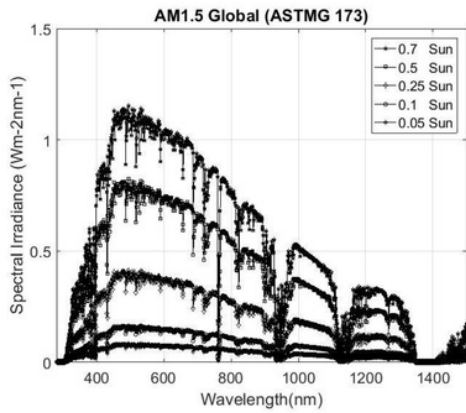


Fig. 2. AM1.5G Suns Spectrum Data (0.7, 0.5, 0.25, 0.1, 0.05)

According to the specifications of the Fresnel lens, only 92% of the light is transmitted to hot/cold mirrors. Further, the hot mirror specification used in this simulation transmitted 90% of the light to PV, and 95% was reflected to TEG; on the contrary, The cold mirror reflected 95% of light to PV and 90% to TEG.

TABLE I
TYPE OF PV: ASC 4040 SPECIFICATIONS DATA

Components	Parameter	Value
P	Maximum power	0.082 W
V_{MP}	Maximum power voltage	1.85 V
I_{MP}	Maximum power current	0.0443 A
V_{OC}	Open circuit voltage	2.4 V
I_{SC}	Short circuit current	0.0541 A
$LxWxH$	Dimensions	50 x 50 mm

TABLE II
TYPE OF TEG: TGM 199-1.4-2.0 SPECIFICATIONS DATA

Components	Parameter	Value
P	Output power	7.3 W
V	Load voltage	5.2 V
I	Current	1.41 A
R	Resistance	3.7 Ω
T_{Hr}	Hot site temperature	200° C
T_c	Cold site temperature	30° C
$LxWxH$	Dimensions	40 x 40 x 4.4 mm

TABLE III
FRESNEL LENS SPECIFICATIONS DATA

Components	Parameter	Value
$LxWxH$	Dimensions	250 x 135 x 0.50 mm
	Maximum operating temperature	80° C
	92% Transmission from	400-1100 nm

TABLE IV
HOT MIRROR SPECIFICATIONS DATA

Components	Parameter	Value
$LxWxH$	Dimensions	40 x 40 x 1mm
	Angle of incident	45° C
	> 90% Transmission from	400-690 nm
	> 95% Reflections from	710-1150 nm

TABLE V
COLD MIRROR SPECIFICATIONS DATA

Components	Parameter	Value
$LxWxH$	Dimensions	40 x 40 x 1 mm
	Angle of incident	45° C
	> 90% Reflections from	400-690 nm
	> 95% Transmission from	710-1150 nm

5 II.1. PV Mathematical Model

The PV module consists of PV cells that are assembled in series. The absorbed energy will make the electrons to generate electricity. The ideal PV cell is modeled as a single diode circuit, as shown in Figure 3.




Fig. 3. The PV cell series model is one diode. I_{ph} is the current of the photon that is generated, I_s is the diode current, and I_{rs} is the resistance current. Inside the PV cell, R_s is the series resistance, and R_{sh} is the parallel resistance. In the ideal analysis, the resistance value of R_s is considered very small, and R_{sh} is very large. The mathematical models of PV modules are expressed in equations 3 and 4 [19] below :

$$I_{pv} = I_{ph} - I_s - I_{rs} \quad (3)$$

$$I_{pv} = N_p I_{ph} - N_p I_s \left[\exp \left(\frac{qV_{pv} + I_{pv} R_s}{N_s k A T} \right) - 1 \right] - \frac{V_{pv} + I_{pv} R_s}{R_h} \quad (4)$$

The maximum power generated from PV can be calculated by the equation:

$$P_{MP} = V_{MP} I_{MP} \quad (5)$$

While the maximum efficiency of PV is expressed as an equation :

$$\eta_{MP} = \frac{I_{MP} V_{MP}}{G A_{pv}} \quad (6)$$

II.2. TEG Mathematical Model

A thermoelectric generator (TEG) is an energy conversion device that can directly convert thermal energy into electrical energy with the working principle of the Seebeck effect. The temperature difference between the hot side and the cold side of the module generates voltage and flows electric current. The heat absorbed by the hot side Q_H and the cold released by the cold side Q_C is expressed in the equation [20]:

$$Q_H = \alpha I_{TEG} T_H + K(T_H - T_C) - 0.5 R I_{TEG}^2 \quad (7)$$

$$Q_C = \alpha I_{TEG} T_H + K(T_H - T_C) + 0.5 R I_{TEG}^2 \quad (8)$$

Where α is the Seebeck coefficient, R is the internal resistance, and K is the thermal conductivity. The output power generated is expressed in the equation:

$$P_{TEG} = V_{TEG} I_{TEG} = Q_H - Q_C = \alpha I_{TEG} (T_H - T_C) - R I_{TEG}^2 \quad (9)$$

So the voltage equation can be written as follows:

$$V_{TEG} = \alpha (T_H - T_C) - R I_{TEG} \quad (10)$$

While the voltage in the open circuit is expressed by the equation:

$$V_{OC} = \alpha (T_H - T_C) \quad (11)$$

Efficiency can be calculated by the equation:


$$\eta_{TEG} = \frac{V_{TEG} I_{TEG}}{Q_H} \quad (12)$$

III. Results and Discussion

The PV and TEG mathematical models have been explained separately in sections 2.2 and 2.3. In this section, PV and TEG hybrid were carried out and simulated with several variations of irradiation that arrived at the lens, as well as the temperature's variation of the PV module and TEG hot side.

In the simulation conducted, it can show optimal conditions which can produce output power and maximum efficiency. The specifications of lense, mirrors, and modules (PV and TEG) are shown in Tables 1-4.

Simulation results from PV-TEG hybrid show that with the AM1.5G spectrum, the hot mirror transmitting radiation power of 268.470 W/m² to PV and reflects 216.159 W/m² to TEG. Instead, the cold mirror reflects 283.385 W/m² to PV and transmits 204.782 W/m² to TEG.

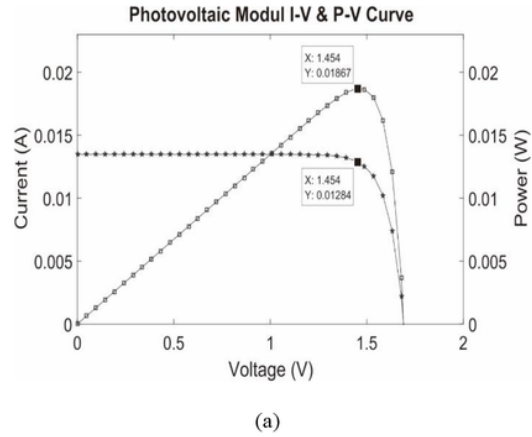

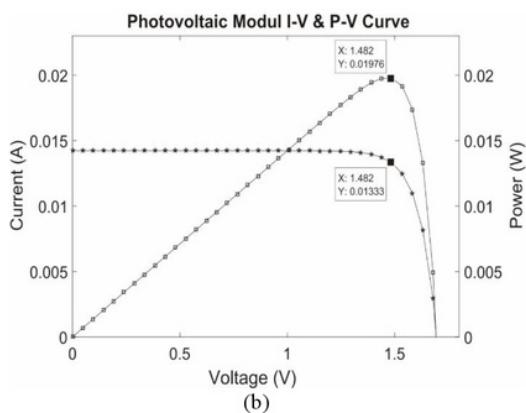


Fig. 4. Characteristics of I-V and P-V curves for 0.7 Sun : (a) Hot Mirror, (b) Cold Mirror

The current and output power characteristics as a function of voltage in PV are shown in Figure 4. Initially, a constant current was followed by an increase in output power, until a specific voltage, both current and power drop dramatically. The optimal power for hot mirror is 0.269 W/m^2 at a voltage of 1.967 V , and the highest current is 0.137 A . For cold mirror, it is 0.285 W/m^2 at 1.967 V and 0.145 A . Calculation of efficiency at the maximum point indicates that using cold mirror is relatively better than hot mirror ($62.9\% > 62.73\%$). These results almost reach the efficiency value (66.3%) that was obtained by Ju et al. [21] that uses a concentrator. In TEG, irradiation spectral form does not affect the output power because the output power is only affected by the difference in hot side temperature and the cold side of the module, so that the output characteristics for hot and cold mirrors will be the same as long as the hot and cold side temperature differences are the same. In Figure 5, the characteristics of the voltage and output power are seen as a function of the current for TEG at hot side temperatures $T_{H} = 60^{\circ}\text{C}$ and the cold side $T_{C} = 30^{\circ}\text{C}$. As the current increases, it is followed by a decrease in voltage, while the output power forms a parabolic characteristic.

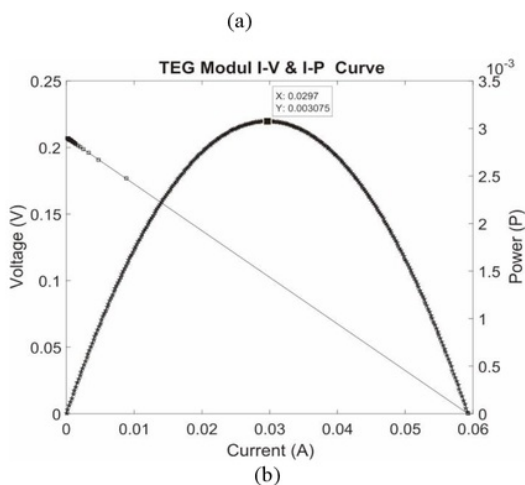
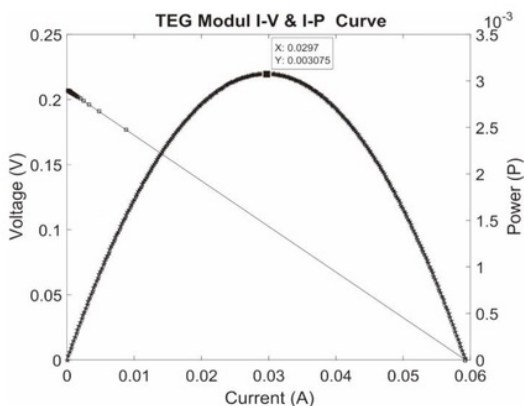


Fig. 5. Characteristics of I-V and I-P curves in TEG for $T_{H} = 35^{\circ}\text{C}$ and $T_{C} = 30^{\circ}\text{C}$: (a) Hot Mirror, (b) Cold Mirror

The optimum power produced for hot and cold mirrors has the same value of 0.227 W/m^2 at a voltage of 0.920 V and a current of 0.247 A . From the calculation of the efficiency of TEG, a value of 1.418% is obtained. This result is lower than Ju et al. [21] as they use additional elements of the heat collector and heat sink to increase heat absorption and also by using 1 Sun's irradiance. In this study, the overall maximum efficiency of hybrid PV-TEG using hot mirror was 0.496 W/m^2 and 64.14% , while PV-TEG cold mirrors were 0.512 W/m^2 and 64.31% .

III.1. Irradiation Variations in PV

Figures 6 and 7 shows the simulation results of irradiation variations for PV (0.05, 0.1, 0.25 0.5 and 0.7 Suns) at a standard temperature of 25°C . This result shows the sensitivity of changes in irradiation towards the value of the current produced by PV. The absorbed irradiation intensity value is directly proportional to the value of the current coming out of the PV cell, which is also in line with the results obtained by [18,19].

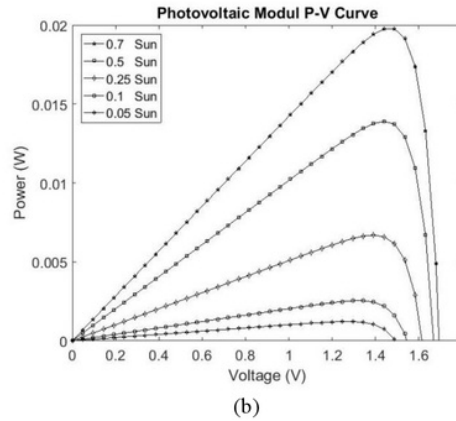
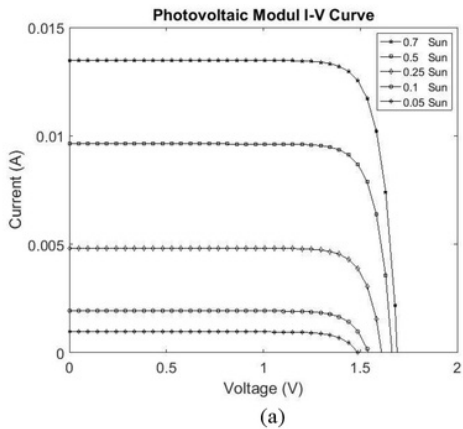


Fig. 7. P-V radiation change curve: (a) Hot Mirror, (b) Cold Mirror



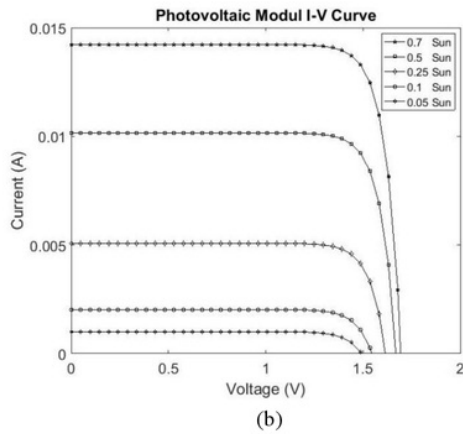


Fig. 6. I-V radiation change curve: (a) Hot Mirror, (b) Cold Mirror

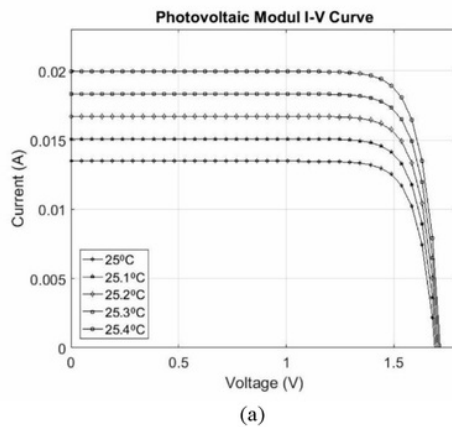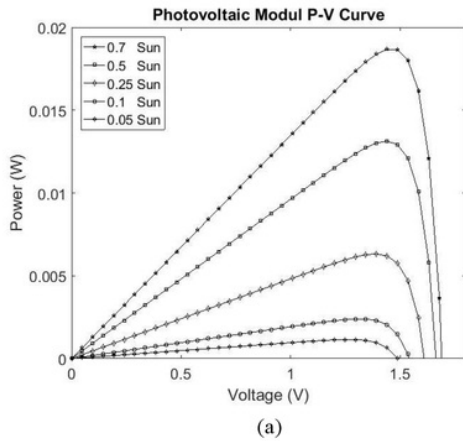

For the output power, as shown in Figure 7, it can be seen that the change in radiation intensity also immensely affected the output power generated. The exciting thing that is shown is the exponential shift in the peak point. Another thing that is found out in this simulation is the value of the output power by using a cold mirror is higher than the hot mirror.

III.2. Temperature Variations in PV

Figures 8 and 9 show the temperature variations of the PV module from 25 to 45°C, precisely at 25, 30, 35, 40, and 45°C at constant intensity 0.7 Sun. The increase in temperature causes an increase in current, on the contrary, a decrease in the voltage. The reduction ratio of voltage is higher than the increasing ratio in current so that the output power decreases. In other words, the increase in PV module temperature will cause the output power to be degraded.

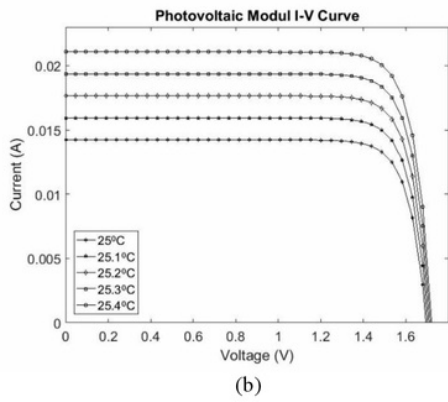


Fig. 8. I-V temperature change curve: (a) Hot Mirror; (b) Cold Mirror

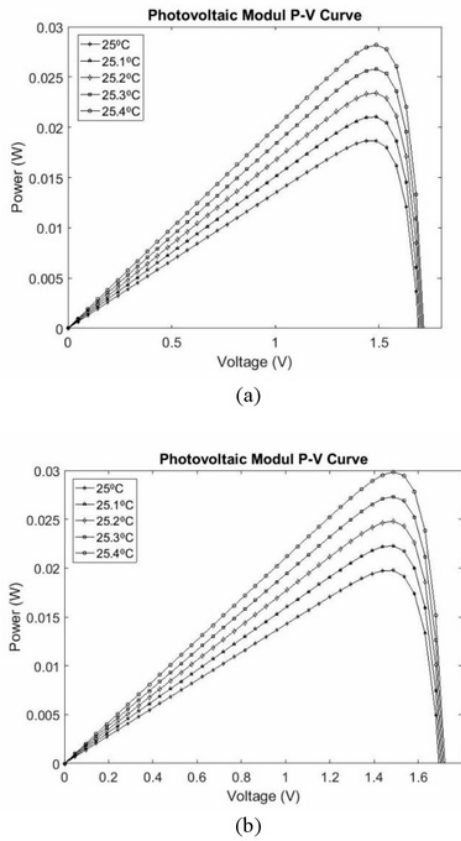


Fig. 9. P-V temperature change curve: (a) Hot Mirror; (b) Cold Mirror

III.3. Temperature Variations in TEG

Figures 10 and 11 show the effect of temperature changes on I-V currents on TEG. The hot side temperature varied from 60 to 120°C, precisely at 60, 80,

100, and 120°C, where the cold side temperature T_C as made constant at 1°C. It appears that the increase in hot side temperature greatly influences the value of current (I), voltage (V), and output power (P) that comes out of TEG. Current and voltage are inversely proportional, while power forms parabolas with increasing current. An increase in temperature causes an increase in output power, where the maximum point shifts exponentially. Increasing the temperature from 60 °C to 120 °C causes an increase in power from 0.227 W/m² to 2.050 W/m² and an efficiency of 1.418 to 3.178%.

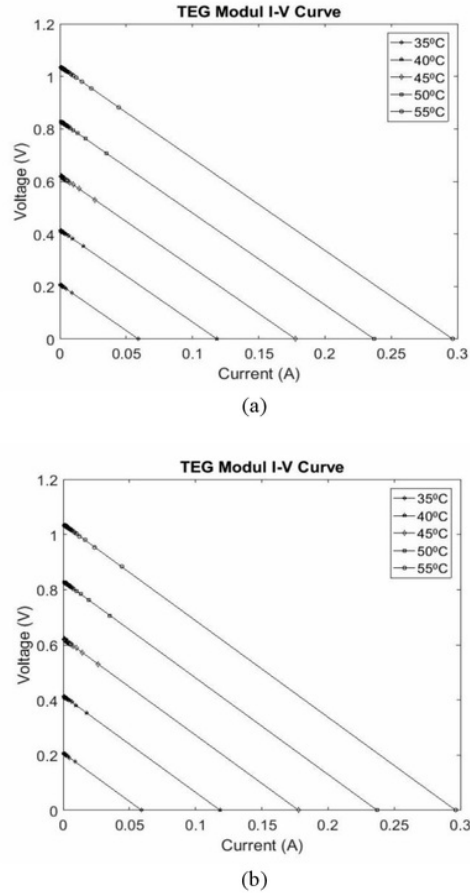


Fig. 10. I-V temperature change curve in TEG: (a) Hot Mirror; (b) Cold Mirror

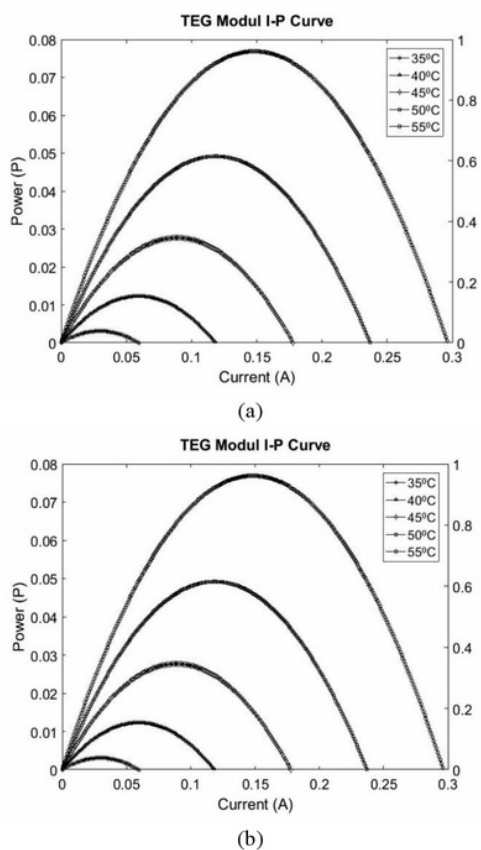


Fig. 11. I-P temperature change curve in TEG: (a) Hot Mirror, (b) Cold Mirror

IV. Conclusion

The PV-TEG hybrid system simulation results using hot and cold mirrors have different results. Using a cold mirror shows better results than a hot mirror. This is because the magnitude of spectrum power per square ($283,385 \text{ W/m}^2$) reflected by the cold mirror to the PV is higher than the spectrum power transmitted by the hot mirror ($268,470 \text{ W/m}^2$) to the PV. The simulation results also show that the variation of irradiation and temperature in PV dramatically affects the power output and efficiency. An increase in irradiation causes parameters such as current and voltage to increase, but an increase in temperature in PV can also cause parameters such as current and voltage to decrease so that the output power and efficiency decreases. Whereas in TEG, a very influential aspect is the difference between the hot side and the cold side temperature. An increase in temperature in TEG results in an increase in current and voltage so that the output power and efficiency increase. The maximum power per square generated by a hot mirror on

a hybrid PV-TEG system is 0.094 W/m^2 and the efficiency is 48.07%, while with a cold mirror TEG is 0.096 W/m^2 and efficiency is 50.37% on the 0.7 Sun spectrum, with a PV temperature of 25°C on the hot side of TEG 55°C . A further review is needed by installing air cooling to maintain temperature stability in both PV and TEG modules leading to an increase in output power and efficiency.

References

- [1] Thorpe D, *Solar Energy Pocket Reference*: Routledge Taylor and Francis Group: (New York, NY, USA 2018).
- [2] A. Razak, Y. Irwan, W. Z. Leow, M. Irwanto, I. Safwati, and M. Zhafarina, Investigation of the Effect Temperature on Photovoltaic (PV) Panel Output Performance, *International Journal Advanced Science Engineering Information Technology*, Vol. 6, n. 5, pp. 682, 2016.
- [3] A. Radwan, M. Ahmed, and S. Ookawara, Performance enhancement of concentrated photovoltaic systems using a microchannel heat sink with nanofluids, *Energy Conversion and Management*, Vol. 119, pp. 289–303, 2016.
- [4] S. Soltani, A. Kasaeian, H. Sarrafha, and D. Wen, An experimental investigation of a hybrid photovoltaic/thermoelectric system with the nanofluid application, *Solar Energy*, Vol. 155, pp. 1033–1043, 2017.
- [5] Y. Du, Advanced thermal management of a solar cell by a nano-coated heat pipe plate: A thermal assessment, *Energy Conversion, and Management*, Vol. 135, pp. 70-76, 2017.
- [6] Mustofa, Basri, and Y. A. Rahman, *Experimental investigation from different focal length of Fresnel lens on thermoelectric generators performance*, International Conference on Industrial Technology for Sustainable Development (ICon-ITSD) 2017, Makassar, Indonesia, 25-26 October 2017, IOP conference series: Earth Environmental Science, Vol. 1, n. 1 pp. 175 2018.
- [7] D. N. Kossyvakis, G. D. Voutsinas, E. V. Hristoforou, Experimental analysis and performance evaluation of a tandem photovoltaic – thermoelectric hybrid system, *Energy Conversion and Management*, Vol 117, pp. 490–500, 2016.
- [8] R. Lamba, S.C. Kaushik, Modeling, and performance analysis of a concentrated photovoltaic – thermoelectric hybrid power generation system, *Energy Conversion and Management*, Vol 115, 288–298, 2016.
- [9] A. Makki, S. Omer, Y. Su, H. Sabir, Numerical investigation of heat pipe-based photovoltaic – thermoelectric generator (HP-PV / TEG) hybrid system, *Energy Conversion and Management*, Vol. 112, pp. 274–287, 2016.
- [10] F. J. Willars-Rodríguez, E. A. Chávez-Urbiola, P. Vorobiev, Y. V. Vorobiev, Investigation of a solar hybrid system with concentrating Fresnel lens, photovoltaic and thermoelectric generators, *International Journal of Energy Research*, Vol. 41, pp. 377-388, 2016.
- [11] E. Elsarrag, H. Pernau, J. Heuer, N. Roshan, Y. Alhor, and K. Bartholomé, Spectrum splitting for efficient utilization of solar radiation: a novel photovoltaic – thermoelectric power generation system, *Renewables Wind, Water, Solar*, Vol. 2, pp. 16, 2015.
- [12] Mustofa, Z. Djafar, Syafaruddin, and W. H. Piarah, A new hybrid of the photovoltaic-thermoelectric generator with hot mirror as spectrum splitter, *Journal Physical Science*. Vol. 29, n. 2, pp. 63–75, 2018.
- [13] W. H. Piarah, Z. Djafar, Syafaruddin, and Mustofa, The Characterization of a Spectrum Splitter of TechSpec AOI 50.0mm Square Hot and Cold Mirrors Using a Halogen Light for a Photovoltaic-Thermoelectric Generator Hybrid, *Energies*, Vol. 12, n. 3, pp. 353, 2019.
- [14] A. Doolittle, Lecture 2: The Nature of Light Reading Assignment – Chapter 2 of PVCDROM The Nature of Light, in *the nature of light, reading the assignment*, pp. Chapter 2, 2007.
- [15] Edmund Optics, Datasheet of Hot Mirror, Available online: <https://www.edmundoptics.com/high-performance-hot->

- [mirrors/13824](#) (accessed on 11 November 2018).
- [16] Edmund Optics, Datasheet of Cold Mirror, Available online: <https://www.edmundoptics.com/f/high-performance-cold-mirrors/13821> (accessed on 11 November 2018).
- [17] S. Liu, PVASCS40 Alibaba.com. Available online: https://www.alibaba.com/product-detail/1W-small-size-customizedamorphoussilicon_60159308905.html?spm=a2700.7724857.normalList.49.3a24696eEpoJ6 (accessed on 11 January 2019)
- [18] Kyocerasolar. Available online: <http://kryothermtec.com/assets/dir2attz/ru/TGM-199-1.4-2.0.pdf> (accessed 11 November 2018)
- [19] F. Technologies, Datasheet of Fresnel lenses. Available online: <http://www.fresneltech.com/contacts.html> (accessed on 19 January 2019)
- [20] C. Honsber, S. Bowden, PV Education, Radiant Power Density. Available online: https://www.pveducation.org/pvcdrom/properties-of_sunlight/radiant-power-density (accessed on 19 January 2019)
- [21] N. A. Zainal, Ajisman, A. R. Yusoff, *Modelling of Photovoltaic Module Using Matlab Simulink*, 2nd International Manufacturing Engineering Conference and 3rd Asia-Pacific Conference on Manufacturing Systems (iMEC-APCOMS 2015), Kuala Lumpur, Malaysia, 12-14 November 2015; IOP Conference Series: Material Science Engineering, pp. 114, 2016.
- [22] A. Belkaid, I. Colak, K. Kayisli, Modeling and Simulation of Thermo Electrical Generator with MPPT," *ICRERA*, Vol. 6, pp. 855–860, 2017.
- [22] X. Ju, Z. Wang, G. Flamant, P. Li, W. Zhao, Numerical analysis and optimization of a spectrum splitting concentration photovoltaic – thermoelectric hybrid system. *Solar Energy*, Vol. 86, pp. 1941–1954, 2012.
- [23] A. Belkassmi, A. Rafiki, K. Gueraoui, L. Elmaimouni, O. Tata, N. Hassanain, *Modeling and Simulation of Thermo Electrical Generator with MPPT*. *ICEMIS*, 2017, Vol. 6, pp. 855–860, 2017.



Zuryati Djafar received the B.E. and M.S degree in mechanical engineering from Universitas Hasanuddin, Makassar, Indonesia, in 1992 and 2007, respectively, and her Doctoral degree in thermal energy from Universitas Indonesia, Jakarta, Indonesia, in 2013. Her research interests focus on the application of thermal energy and thermoelectric cooler.



Hariyanto received the B.E. degree in mechanical engineering from Musamus University, Merauke, Indonesia, in 2013, the M.S. degree in mechanical engineering from Universitas Hasanuddin, Makassar, Indonesia, in 2019. Since 2014, he has been an assistant lecturer in the Department of Mechanical Engineering at Musamus University, Merauke, Indonesia. His research interests focus on modeling, simulation, and experimental on the thermal of photovoltaic.



Mustofa received the B.E. degree in mechanical engineering from Universitas Hasanuddin, Makassar, Indonesia, in 1993, the M.S. degree in advanced manufacturing engineering from the University of South Australia, Adelaide, in 2006, and Doctoral degree in light energy and optics from Universitas Hasanuddin, Makassar, Indonesia, in 2019. His research interests focus on light energy, optics, and solar energy.

Authors' information

The photographs, names, the vitae, the affiliation, and the research interests of the authors should be given at the end of the paper.

The photo must be 2.45 cm x 2.45 cm. The text (8 pt) wrapping style must be around the frame.

¹ Department of Mechanical Engineering, Universitas Hasanuddin, Gowa, Indonesia

² Department of Mechanical Engineering, Universitas Musamus, Merauke, Indonesia

³ Department of Mechanical Engineering, Universitas Tadulako, Palu, Indonesia



Wahyu H. Piarah received the B.E. and M.S. degrees in mechanical engineering from Bandung Institute of Technology, ITB, Bandung, Indonesia, in 1985 and 1987, respectively. He graduated with his Doctoral degree (Dr. Ing.) from TU Berlin in 2001 in the field of process engineering taken the energy conversion as a minor project. His research areas include mass fluid transfer and energy conversion — his research interests on the thermal of photovoltaic and thermoelectric.

ORIGINALITY REPORT

% **18**
SIMILARITY INDEX

% **10**
INTERNET SOURCES

% **12**
PUBLICATIONS

% **10**
STUDENT PAPERS

PRIMARY SOURCES

1 www.iieta.org Internet Source % **5**

2 www.mdpi.com Internet Source % **2**

3 Dianhong Li, Yimin Xuan, Ershuai Yin, Qiang Li. "Conversion efficiency gain for concentrated triple-junction solar cell system through thermal management", Renewable Energy, 2018
Publication % **1**

4 Submitted to University of Mauritius Student Paper % **1**

5 Nurul Afiqah Zainal, Ajisman, Ahmad Razlan Yusoff. "Modelling of Photovoltaic Module Using Matlab Simulink", IOP Conference Series: Materials Science and Engineering, 2016
Publication % **1**

6 Abdelhakim BELKAID, Ilhami COLAK, Korhan KAYISLI, Ramazan BAYINDIR, Halil Ibrahim BULBUL. "Maximum Power Extraction from a Photovoltaic Panel and a Thermoelectric % **1**

Generator Constituting a Hybrid Electrical Generation System", 2018 International Conference on Smart Grid (icSmartGrid), 2018

Publication

7

Submitted to Monash University Sunway Campus Malaysia Sdn Bhd

Student Paper

<% 1

8

Guiqiang Li, Samson Shittu, Thierno M.O. Diallo, Min Yu, Xudong Zhao, Jie Ji. "A review of solar photovoltaic-thermoelectric hybrid system for electricity generation", Energy, 2018

Publication

<% 1

9

P. Motiei, M. Yaghoubi, E. GoshtashbiRad, A. Vadiee. "Two-dimensional unsteady state performance analysis of a hybrid photovoltaic-thermoelectric generator", Renewable Energy, 2018

Publication

<% 1

10

Submitted to University of Northumbria at Newcastle

Student Paper

<% 1

11

Akkaya, R.. "A microcontroller-based stand-alone photovoltaic power system for residential appliances", Applied Energy, 200408

Publication

<% 1

12

www.tntconf.org

Internet Source

<% 1

13

Submitted to University of Sheffield

Student Paper

<% 1

14

Submitted to Deakin University

Student Paper

<% 1

15

Submitted to Universiti Teknikal Malaysia
Melaka

Student Paper

<% 1

16

jrenewables.springeropen.com

Internet Source

<% 1

17

Ahmed Abdo, Shinichi Ookawara, Mahmoud
Ahmed. "Performance evaluation of a new
design of concentrator photovoltaic and solar
thermoelectric generator hybrid system", Energy
Conversion and Management, 2019

Publication

<% 1

18

Lamba, Ravita, and S.C. Kaushik. "Modeling
and performance analysis of a concentrated
photovoltaic–thermoelectric hybrid power
generation system", Energy Conversion and
Management, 2016.

Publication

<% 1

19

newton.hanyang.ac.kr

Internet Source

<% 1

20

Submitted to Higher Education Commission
Pakistan

Student Paper

<% 1

-
- 21 Submitted to Mapua Institute of Technology <% 1
Student Paper
-
- 22 Submitted to Netaji Subhas Institute of Technology <% 1
Student Paper
-
- 23 Nafaa Jeddi, Lilia El Amraoui, Fernando Tadeo Rico. "A comparative study and analysis of different models for photovoltaic (PV) array using in solar car", 2017 Twelfth International Conference on Ecological Vehicles and Renewable Energies (EVER), 2017 <% 1
Publication
-
- 24 media.neliti.com <% 1
Internet Source
-
- 25 Submitted to Cranfield University <% 1
Student Paper
-
- 26 Submitted to University of Malaya <% 1
Student Paper
-
- 27 Submitted to University of Nottingham <% 1
Student Paper
-
- 28 J. E. Flores-Mena, L. A. Juárez Morán, J. Díaz Reyes. "Electronic Equipment Proposal to Improve the Photovoltaic Systems Efficiency", Brazilian Journal of Physics, 2011 <% 1
Publication
-

- | | | |
|----|--|------|
| 29 | F. J. Willars-Rodríguez, E. A. Chávez-Urbiola, P. Vorobiev, Yu. V. Vorobiev. "Investigation of solar hybrid system with concentrating Fresnel lens, photovoltaic and thermoelectric generators", International Journal of Energy Research, 2017
Publication | <% 1 |
| 30 | fr.scribd.com
Internet Source | <% 1 |
| 31 | socratic.org
Internet Source | <% 1 |
| 32 | Enviado para University of Limerick em 2012-03-15
Student Paper | <% 1 |
| 33 | Submitted to Queen's University of Belfast
Student Paper | <% 1 |
| 34 | Submitted to University of South Australia
Student Paper | <% 1 |
| 35 | Aditya Chauhan, V.V. Tyagi, Sanjeev Anand. "Futuristic approach for thermal management in solar PV/thermal systems with possible applications", Energy Conversion and Management, 2018
Publication | <% 1 |
| 36 | Lin, Jian, Tianjun Liao, and Bihong Lin. | <% 1 |

"Performance analysis and load matching of a photovoltaic–thermoelectric hybrid system", Energy Conversion and Management, 2015.

Publication

EXCLUDE QUOTES ON

EXCLUDE ON
BIBLIOGRAPHY

EXCLUDE MATCHES < 5
WORDS