

# Prosiding\_AMM\_2018\_\_Muham mad\_Zubair\_Muis\_Alie.pdf

*by*

---

FILE	PROSIDING_AMM_2018__MUHAMMAD_ZUBAIR_MUIS_ALIE.PDF (481.56K)		
TIME SUBMITTED	08-NOV-2019 05:10AM (UTC+0700)	WORD COUNT	2621
SUBMISSION ID	1209306291	CHARACTER COUNT	12952

## Collapse Analysis on VLCC Subjected to Longitudinal Bending with Damages

Muhammad Zubair Muis ALIE<sup>1,a\*</sup>, WAHYUDDIN<sup>1,b</sup>, Syamsul ASRI<sup>1,c</sup>,  
 Farianto Fachruddin LAGE<sup>1,d</sup>, JUSWAN<sup>1,e</sup>, Taufiqur RACHMAN<sup>1,f</sup>

<sup>1</sup>Department of Naval Architecture and Ocean Engineering, Engineering Faculty,  
 Hasanuddin University, Indonesia

<sup>a</sup>zubair.m@eng.unhas.ac.id, <sup>b</sup>wahyumustafa@yahoo.co.id, <sup>c</sup>sa\_tanri\_kapal83@yahoo.com,  
<sup>d</sup>fariantorma@gmail.com, <sup>e</sup>juswansade@gmail.com, <sup>f</sup>ocean\_d321@yahoo.com

\*corresponding author

**Keywords:** VLCC, cross section, longitudinal bending, damages.

**Abstract.** The objective of the present study is to analyze the progressive collapse of VLCC hull girder with damages subjected to longitudinal bending. For the simple case, the cross-section is assumed to be remained plane and the vertical bending moment is applied to the cross section. The residual stress, initial imperfection, and crack are not considered. The damage scenarios are located at the center part and asymmetric position of the cross section. analyze the progressive collapse including its behavior of VLCC ship hull, the simply supported is imposed to the cross section and taking the hogging and sagging condition into account. The results obtained for intact and damages condition by the analytical solution is compared and summarized with one another.

### Introduction

Grounding and collision damages may occur on ship when it operates at sea. The grounding and collision accidents of liquid cargo such as crude oil carriers effect the ship structure becomes damage and the oil spills makes the ocean environment polluted. In conjunction with this, the design of ship structure must be considered as one of the functional requirement for structural safety.

The investigations of ship damage due to grounding and collision have been conducted by some research. The mechanics of grounding on relatively plane slopes were analyzed with emphasis on evaluation of the overall forces on the ship hull girder was presented by Pedersen [1]. To get at much insight as possible into the mechanics of ship grounding simplifications to the problem were sought such that analytical solutions could be derived. The same assumption as that used in the method of Wierzbicki and Thomas for a separated curved surface was employed by Zhang [2], in which the material rolls up into two curved surfaces behind the wedge tip. Damage to ship bottom in grounding accident is quite complex. So, a semi empirical method was proposed for determining bottom damage resistance in grounding scenario. Finally, simple expression, expressed in terms of the ship's principal parts, for determining damage resistance and damage extent in ship grounding were presented. An investigation of the longitudinal strength of damaged ship hulls for a broad spectrum of collision and grounding accidents was reported by Wang [3]. Both the hull girder section modulus and hull girder ultimate strength were calculated. The aim is to obtain simple relations to assess residual hull girder strength, which may be used as handy and reliable tools to help make timely decisions in the event of an emergency. Muis Alie, M.Z [4] analyzed the residual strength of asymmetrically damaged ship hull girder under longitudinal bending. Beam finite element method was used for the assessment of residual strength of two single hull bulk carriers and a three-cargo hold model of a single-side Panamax Bulk Carrier in hogging and sagging conditions. A fast and reasonably accurate method for exploring the collapse of hull girder in the damage condition was developed by Paik [5]. Location and amount of collision and grounding damage were defined based on the ABS safe hull guide. To characterize residual strength, an elastic section modulus based residual strength index and an ultimate bending strength based residual strength

index  $w_{18}$  defined. As an illustrative example, these indices were obtained for the hull girder collapse of a hypothetical Panamax class bulk carrier after collision and grounding.

In the present study, a VLCC hull girder with damages subjected to longitudinal bending is analyzed. For the simple case, the cross-section is assumed to be remained plane and the vertical bending moment is applied to the cross section. The welding residual stress, initial imperfection, and crack are not considered. The damage scenarios are located at the center part and asymmetric position of the cross section. To analyze the progressive collapse including its behavior of VLCC ship hull, the simply supported is imposed to the cross section and taking the hogging and sagging condition into account. The results obtained for intact and damages condition by the analytical solution is compared and summarized with one another.

### Analytical Formulation

Generally, damages due to grounding or collision are assumed to be located at an asymmetric position of a hull girder cross section as shown in Fig. 1. The progressive collapse of ship hull girder subjected to longitudinal bending moment due to grounding and collision damages is calculated using some formulations in the analytical solution. Although the grounding or collision damages takes place at the asymmetric position, the cross section is assumed to be remained plane. In conjunction with this, the axial strain at the structural element caused by vertical and horizontal curvature can be expressed as,

$$\varepsilon_i(y_i, z_i) = \varepsilon_0 + y_i \phi_H + z_i \phi_V \quad (1)$$

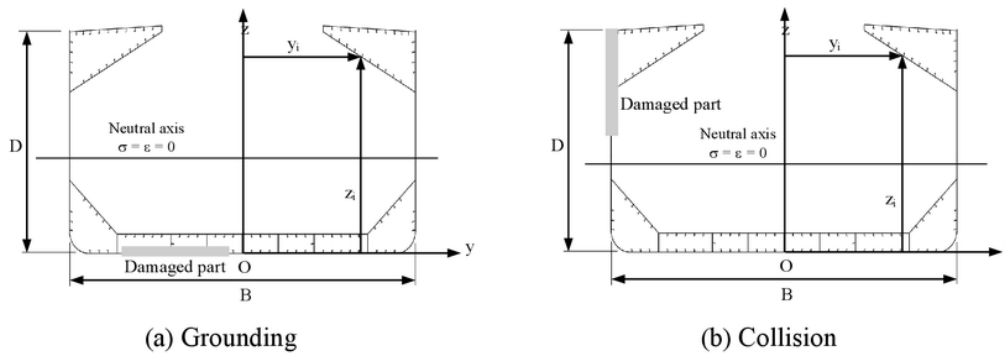


Figure 1. Damages on the ship cross section.

where  $\varepsilon_0$ ,  $\phi_H$  and  $\phi_V$  are the axial strain at the origin O, horizontal curvature and vertical curvature respectively. The y and z are the coordinates with the origin at the bottom keel are defined according to Fig. 1. The relationship between axial stress and axial strain to calculate the individual element can be expressed by the following equation

$$\sigma = f_i(\varepsilon) \quad (2)$$

where  $f_i(0) = 0$ . The axial force  $P$ , the vertical bending moment  $M_V$  and the horizontal bending moment  $M_H$  can be obtained by using the formulas:

$$\begin{aligned} P &= \sum_{i=1}^N \sigma_i A_i \cong 0 \\ M_V &= \sum_{i=1}^N \sigma_i A_i y_i \\ M_H &= \sum_{i=1}^N \sigma_i A_i x_i \end{aligned} \quad (3)$$

Those values are obtained by integrating the axial stress over the intact part of the cross section. Where  $N$  is the number of intact elements and  $A_i$  is a cross section of individual element. The tangential stiffness obtained as a slope of the average stress-average strain relationship of the individual element by  $D_i$  as shown in Fig. 2, the relationship of axial stress and strain can be expressed as,

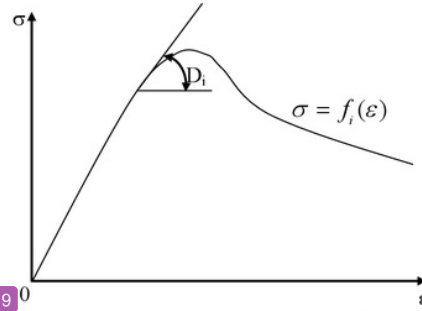


Figure 2. Average stress-average strain relationship of an element.

$$\Delta\sigma = D_i\Delta\varepsilon \left( D_i = \frac{df_i}{d\varepsilon} \right) \tag{4}$$

By performing Eqs. 1 and 4, the axial load, vertical curvature and horizontal curvature from Eq. 3 can be written into the matrix form as follow:

$$\begin{Bmatrix} \Delta P = 0 \\ \Delta M_H \\ \Delta M_V \end{Bmatrix} = \begin{bmatrix} \bar{D}_{AA} & \bar{D}_{AH} & \bar{D}_{AV} \\ \bar{D}_{HA} & \bar{D}_{HH} & \bar{D}_{HV} \\ \bar{D}_{VA} & \bar{D}_{VH} & \bar{D}_{VV} \end{bmatrix} \begin{Bmatrix} \Delta\varepsilon_0 \\ \Delta\phi_H \\ \Delta\phi_V \end{Bmatrix} \tag{5}$$

The axial force  $\Delta P$  from Eq. 5 may be rearranged in the form

$$\begin{aligned} \Delta P &= \bar{D}_{AA}\Delta\varepsilon_0 + \bar{D}_{AH}\Delta\phi_H + \bar{D}_{AV}\Delta\phi_V \\ &= \sum_{i=1}^N D_i (\Delta\varepsilon_0 + y_i\Delta\phi_H + z_i\Delta\phi_V) A_i \\ &= \sum_{i=1}^N D_i \{ \Delta\varepsilon_G + (y_i - y_G)\Delta\phi_H + (z_i - z_G)\Delta\phi_V \} A_i \end{aligned} \tag{6}$$

where

$$\Delta\varepsilon_G = \Delta\varepsilon_0 + y_G\Delta\phi_H + z_G\Delta\phi_V \tag{7}$$

$y_G$  and  $z_G$  are given by

$$\begin{aligned} y_G &= \frac{\left( \sum_{i=1}^N y_i D_i A_i \right)}{\left( \sum_{i=1}^N D_i A_i \right)} \\ z_G &= \frac{\left( \sum_{i=1}^N z_i D_i A_i \right)}{\left( \sum_{i=1}^N D_i A_i \right)} \end{aligned} \tag{8}$$

The Eq. 5 can be written by assuming that under pure longitudinal bending  $\Delta P = 0$ , therefore,

$$\begin{Bmatrix} \Delta P = 0 \\ \Delta M_H \\ \Delta M_V \end{Bmatrix} = \begin{bmatrix} \bar{D}_{AA} & 0 & 0 \\ 0 & \bar{D}_{HH} & \bar{D}_{HV} \\ 0 & \bar{D}_{VH} & \bar{D}_{VV} \end{bmatrix} \begin{Bmatrix} \Delta \varepsilon_G \\ \Delta \phi_H \\ \Delta \phi_V \end{Bmatrix} \quad (9)$$

where

$$\begin{aligned} D_{AA} &= \sum_{i=1}^N D_i A_i & D_{HV} &= D_{VH} = \sum_{i=1}^N D_i (y_i - y_G)(z_i - z_G) A_i \\ D_{HH} &= \sum_{i=1}^N D_i (y_i - y_G)^2 A_i & D_{VV} &= \sum_{i=1}^N D_i (z_i - z_G)^2 A_i \end{aligned} \quad (10)$$

Using the Eq. 10, the relationship of the biaxial bending moments and curvatures can be given by the following formula,

$$\begin{Bmatrix} \Delta M_H \\ \Delta M_V \end{Bmatrix} = \begin{bmatrix} D_{HH} & D_{HV} \\ D_{VH} & D_{VV} \end{bmatrix} \begin{Bmatrix} \Delta \phi_H \\ \Delta \phi_V \end{Bmatrix} \quad (11)$$

The bending moment-curvature relationship, Eq. 11 can be <sup>27</sup> applied to the ship hull girder strength by the following loading and/or constraint conditions. The first is the hull girder under pure vertical bending moment

$$\begin{Bmatrix} 0 \\ \Delta M_V \end{Bmatrix} = \begin{bmatrix} D_{HH} & D_{HV} \\ D_{VH} & D_{VV} \end{bmatrix} \begin{Bmatrix} \Delta \phi_H \\ \Delta \phi_V^0 \end{Bmatrix} \quad (12)$$

where the superscript '0' indicates a prescribed value, and the solutions are:

$$\begin{aligned} \Delta \phi_H &= -\frac{D_{HV}}{D_{HH}} \Delta \phi_V^0 \\ \Delta M_V &= \left( D_{VV} - \frac{D_{VH} D_{HV}}{D_{HH}} \right) \Delta \phi_V^0 \end{aligned} \quad (13)$$

The second is the hull girder under vertical bending moment with horizontal curvature constrained,

$$\begin{Bmatrix} \Delta M_H \\ \Delta M_V \end{Bmatrix} = \begin{bmatrix} D_{HH} & D_{HV} \\ D_{VH} & D_{VV} \end{bmatrix} \begin{Bmatrix} 0 \\ \Delta \phi_V^0 \end{Bmatrix} \quad (14)$$

and the solutions are:

$$\begin{aligned} \Delta M_H &= D_{HV} \Delta \phi_V^0 \\ \Delta M_V &= D_{VV} \Delta \phi_V^0 \end{aligned} \quad (15)$$

<sup>15</sup>

### Method of Analysis

<sup>5</sup> Collapse analysis of the ship hull girder with grounding and collision damages are performed using the Smith's method. A VLCC of tanker is taken for the assessment of the collapse analysis. The ship breadth and high are 42000 mm and 20300 mm, respectively. The grounding damage is assumed to be asymmetric position <sup>4</sup> of the cross section. The transversal damage extent is chosen 10% and 70% of the ship's breadth. For the case of collision damage, the transversal damage extent is B/16, while the vertical damage extent is set up to be 10% and 70%, respectively. The longitudinal damage extent is one-frame space for grounding and collision damages. The analysis procedures <sup>9</sup> the collapse analysis of VLCC tanker for grounding and collision damages are summarized as follows:

1. Subdivide the cross-section into elements consists of stiffener and attached plate.
2. Derive the average stress-average strain relationship of individual element by considering the influence of buckling and yielding.
3. Derive the tangential axial stiffness of individual element from the average stress-average strain relationship.
4. Calculate the center position of neutral axis  $y_G$  and  $z_G$ .
5. Evaluate the flexural stiffness of the cross section with respect to neutral axis.
6. Calculate the curvature and/or bending moment under specified condition.
7. Calculate the strain in individual element from the curvature, and their stress using the slope of average stress-average strain curve.

The grounding damages for 10% and 70% of VLCC tanker are presented in the Fig. 3 as follows:

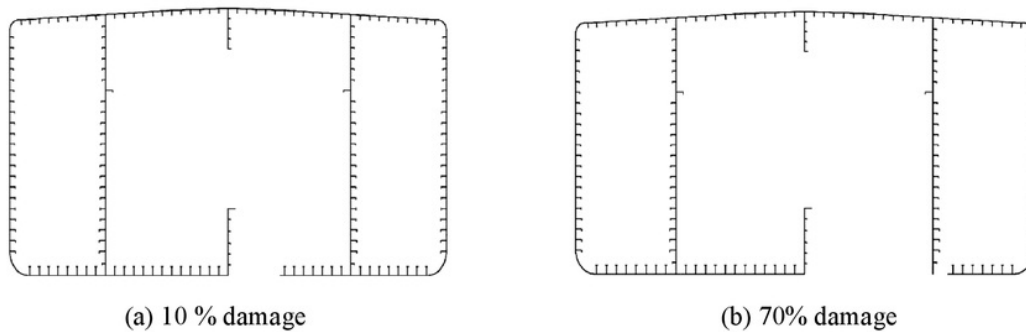


Figure 3. Grounding damage of VLCC Tanker.

while the collision damages for 10% and 70% of VLCC tanker are presented in the Fig. 4 as follows:


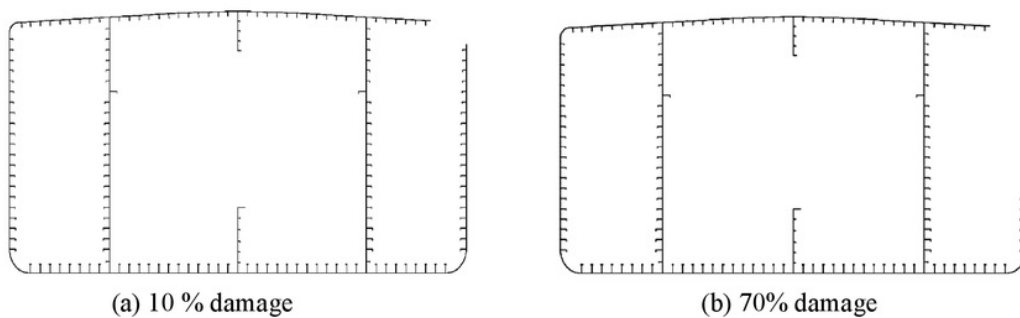



Figure 4. Collision damage of VLCC Tanker.

## Results and Discussion

Collapse analysis of ship hull girder with grounding and collision damages are performed using the Smith's method. A VLCC of tanker is taken as the object of the analysis and subjected to longitudinal bending moment by taking the hogging and sagging condition into account. The ultimate strength for 10% and 70% of grounding damages are summarized as follows:

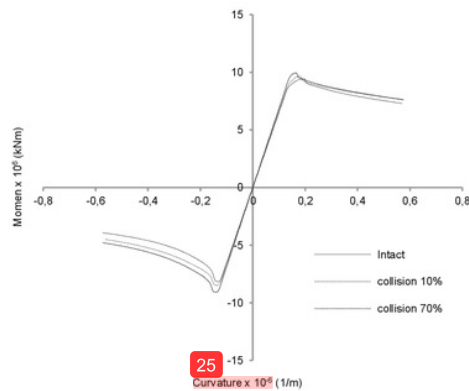


(a) Intact and damages

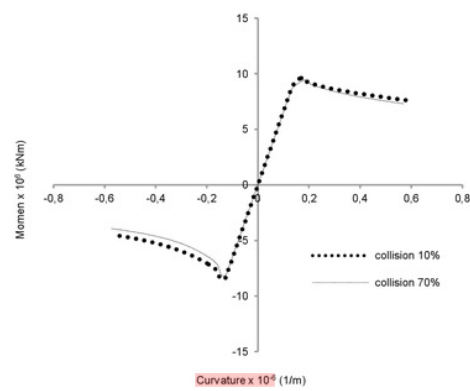


(b) Damages only

Figure 5. Moment-curvature relationship.

Figure 5 shows the comparison of the moment-curvature relationship of the ultimate strength for 10% and 70% collision damages. It is clear that the ultimate strength decreases not only hogging but also sagging conditions, when those compare to the intact one. The significant influence takes place on the post ultimate strength, particularly when the ship is under compression. This is because there is transversal damage extent of  $B/16$  at the deck part.

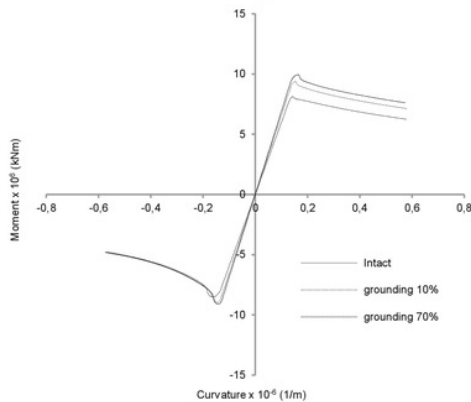

(a) Intact and damages

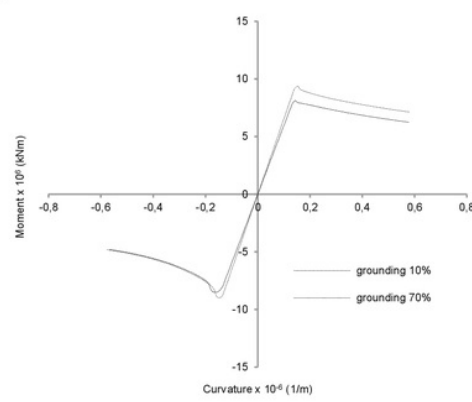

(b) Damages only

Figure 6. Moment-curvature relationship.

The comparison of the moment-curvature relationship of the ultimate strength for 10% and 70% grounding damages are shown in Fig. 6. When the grounding damage is considered, the significant different of the collapse behavior takes place on the hogging condition. It is known well that under hogging condition, bottom part is under compression and deck is under tension. In this regard, some of the elements at the bottom part lost their rigidity due to grounding damage. This is also due to the asymmetric position of the damage.

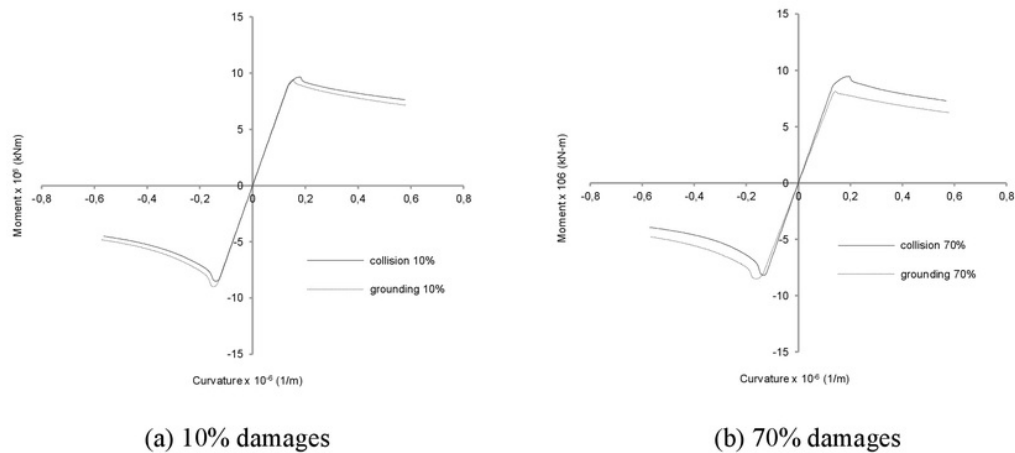


Figure 7. Moment-curvature relationship.

The moment-curvature relationship obtained by analytical solution for 10% damage and 70% damages under hogging and sagging condition subjected to grounding and collision damages. It is observed that the ultimate strength for the collision damage is larger than grounding one under hogging condition. This is due to the transversal damage extent at the deck part since the deck part is under hogging condition. On the other hand, grounding gives larger ultimate strength compared to the collision, since grounding located at the asymmetric position of the bottom part. Similarly with the 70% damage both hogging and sagging condition.

## Conclusions

Collapse analysis of ship hull girder with grounding and collision damages have been conducted using the Smith's method. The following conclusion of the collapse analysis of a VLCC of tanker are summarized :

1. It is clear that the ultimate strength decreases not only hogging but also sagging conditions when those are compared to the intact one. The significant influence takes place on the post ultimate strength, particularly when the ship is under compression.
2. It is observed that the ultimate strength for the collision damage is larger than grounding one under hogging condition. This is due to the transversal damage extent at the deck part since the deck part is under hogging condition. On the other hand, grounding gives larger ultimate strength compared to the collision, since grounding located at the asymmetric position of the bottom part.

## References

- [1] P.T. Pedersen, Ship Grounding and Hull-Girder Strength, *J. Marine Structures* 7 (1994) 1-29.
- [2] S. Zhang, Plate Tearing and Bottom Damage in Ship Grounding, *J. Marine Structures* 15 (2002) 101-117.
- [3] G. Wang, Y. Chen, H. Zhang and H. Peng, Longitudinal Strength of Ships with Accidental Damages, *J. Marine Structures* 15 (2002) 119-138.
- [4] M.Z. Muis Alie, Residual Strength Analysis of Asymmetrically Damaged Ship Hull Girder Using Beam Finite Element Method, *Makara J. of Technology* 20 (2016) 7-12.
- [5] J.K. Paik, A.K. Thayamballi and S.H. Yang, Residual Strength Assessment of Ships after Collision and Grounding, *J. Marine Technology* 35 (1998) 38-54.

ORIGINALITY REPORT

---

%**23**

SIMILARITY INDEX

%**6**

INTERNET SOURCES

%**21**

PUBLICATIONS

%**9**

STUDENT PAPERS

---

PRIMARY SOURCES

---

- |          |  |           |
|----------|--|-----------|
| <b>1</b> | Shengming Zhang. "Plate tearing and bottom damage in ship grounding", Marine Structures, 2002<br>Publication   | <b>%3</b> |
| <b>2</b> | <a href="http://www.eagle.org">www.eagle.org</a><br>Internet Source  | <b>%2</b> |
| <b>3</b> | Pedersen, P.T.. "Ship grounding and hull-girder strength", Marine Structures, 1994<br>Publication  | <b>%2</b> |
| <b>4</b> | <a href="http://china.iopscience.iop.org">china.iopscience.iop.org</a><br>Internet Source  | <b>%2</b> |
| <b>5</b> | Samuel Izaak Latumahina, Muhammad Zubair Muis Alie, Ganding Sitepu. "The Ultimate Strength of Double Hull Oil Tanker Due to Grounding and Collision", Journal of Physics: Conference Series, 2018<br>Publication | <b>%1</b> |
| <b>6</b> | Submitted to Universitas Indonesia<br>Student Paper  | <b>%1</b> |
-

- |    |  |     |
|----|--|-----|
| 7  | Tsumiratin Rizkiani, Muhammad Iqra Ramadhan, Muhammad Zubair Muis Alie. "Progressive Collapse Behaviour of VLCC under Longitudinal Bending", IOP Conference Series: Materials Science and Engineering, 2019<br>Publication | % 1 |
| 8  | Ozgur Ozguc, Purnendu K. Das, Nigel Barltrop. "A comparative study on the structural integrity of single and double side skin bulk carriers under collision damage", Marine Structures, 2005<br>Publication                | % 1 |
| 9  | Tanaka, Yoshiteru, Hiroaki Ogawa, Akira Tatsumi, and Masahiko Fujikubo. "Analysis method of ultimate hull girder strength under combined loads", Ships and Offshore Structures, 2015.<br>Publication                       | % 1 |
| 10 | Submitted to University of Ulsan<br>Student Paper  | % 1 |
| 11 | Submitted to Universitas Sebelas Maret<br>Student Paper  | % 1 |
| 12 | Wang, Xiaozhi, Haihong Sun, Tetsuya Yao, Masahiko Fujikubo, and Roger Basu. "Methodologies on Hull Girder Ultimate Strength Assessment of FPSOs", Volume 2 Structures  | % 1 |

## Safety and Reliability, 2008.

Publication

---

13

Xiao Rong Wang, Shi Wei Chen. "Three Dimensional Simulation and Repair of Skull Maxilla and Dentition Based on CT Scanning and Laser Sintering Technologies", Applied Mechanics and Materials, 2012

Publication

---

% 1

14

M. Tekgoz, Y. Garbatov, C. Guedes Soares. "Strength assessment of an intact and damaged container ship subjected to asymmetrical bending loadings", Marine Structures, 2018

Publication

---

% 1

15

Submitted to Rivers State University of Science & Technology

Student Paper

---

% 1

16

Yao, T.. "Hull girder strength", Marine Structures, 200301/02

Publication

---

<% 1

17

Submitted to University of Newcastle upon Tyne

Student Paper

---

<% 1

18

Hussein, A.W.. "Reliability and residual strength of double hull tankers designed according to the new IACS common structural rules", Ocean Engineering, 200912

Publication

---

<% 1

19

Guswandi, Juswan, Muhammad Zubair Muis Alie, Parjono. "Plate deformation analysis on deck structure of jack-up", IOP Conference Series: Earth and Environmental Science, 2019

Publication

&lt;% 1

20

[ar.scribd.com](https://ar.scribd.com)

Internet Source

&lt;% 1

21

Submitted to iGroup

Student Paper

&lt;% 1

22

Ino Sulistiani, Syafruddin Syarif, Yusran, Dewiani. "Quality Models Engineering for Evaluation of Academic Information System Quality Instrument (AISQI)", 2018 International Conference on Applied Science and Technology (iCAST), 2018

Publication

&lt;% 1

23

Shen Li, Simon D. Benson. "A re-evaluation of the hull girder shakedown limit states", Ships and Offshore Structures, 2019

Publication

&lt;% 1

24

[repository.unair.ac.id](https://repository.unair.ac.id)

Internet Source

&lt;% 1

25

Khaled Galal, Munir Alp Enginsal. "Flexural Behavior of GFRP-Reinforced Concrete Masonry Beams", Journal of Composites for Construction, 2011

&lt;% 1

26

James R. Libby. "Modern Prestressed Concrete", Springer Nature, 1990

Publication

<% 1

---

27

Gaspar, B., A.P. Teixeira, and C. Guedes Soares. "Effect of the nonlinear vertical wave-induced bending moments on the ship hull girder reliability", Ocean Engineering, 2016.

Publication

<% 1

---

EXCLUDE QUOTES ON

EXCLUDE BIBLIOGRAPHY ON

EXCLUDE MATCHES < 5 WORDS