

IJEETC 2021

by Hamdi Rotib

Submission date: 26-Sep-2022 03:16AM (UTC-0400)

Submission ID: 1909237218

File name: Hamdi_IJEETC_2021.pdf (1.9M)

Word count: 3624

Character count: 20926

Electric Load Forecasting for Internet of Things Smart Home Using Hybrid PCA and ARIMA Algorithm

Hamdi W. Rotib¹, Muhammad B. Nappu^{1,2}, Zulkifli Tahir³, Ardiaty Arief^{1,2}, and Muhammad Y. A. Shiddiq⁴

¹Department of Electrical Engineering, Hasanuddin University, Bontomarannu, Gowa, Indonesia

²Centre for Research Development on Energy & Electricity, Hasanuddin University, Tamalanrea, Makassar, Indonesia

³Department of Informatics Engineering, Hasanuddin University, Bontomarannu, Gowa, Indonesia

⁴PT. Armina Sari Mustari Residential Developer, Rappocini, Makassar, Indonesia

Email: widy.rotib@gmail.com; bachtiar@eng.unhas.ac.id; zulkifli@unhas.ac.id; ardiaty@eng.unhas.ac.id

Abstract—Many thousands of research have been conducted for the development of Internet of Things (IoT) devices and energy consumption forecasting. In this research, the electric load forecasting is designed with the development of microcontrollers, sensors, and actuators, added with cameras, Liquid Crystal Display (LCD) touch screen, and minicomputers, to improve IoT smart home system. Using the Python program, Principal Component Analysis (PCA) and Autoregressive Integrated Moving Average (ARIMA) algorithms are integrated into the website interface for electric load forecasting. As provisions for forecasting, a monthly dataset is needed which consists of electric current variables, number of individuals living in the house, room light intensity, weather conditions in terms of temperature, humidity, and wind speed. The main hardware parts are ESP32, ACS712, electromechanical relay, Raspberry Pi, RPi Camera, infrared Light Emitting Diode (LED), Light Dependent Resistor (LDR) sensor, and LCD touch screen. While the main software applications are Arduino Interactive Development Environment (IDE), Visual Studio Code, and Raspberry Pi OS, added with many libraries for Python 3 IDE. The experimental results provided the fact that PCA and ARIMA can predict short-term household electric load accurately. Furthermore, by using Amazon Web Services (AWS) cloud computing server, the IoT smart home system has excellent data package performances.

Index Terms—Hybrid algorithm, internet of things, load forecasting, python IDE, remote control, smart home

I. INTRODUCTION

The electric load pattern for households is very stochastic, changes frequently, and differs significantly between customers [1]. Household electric load depends on the number of electrical appliances used, the number of individuals living in the house, light intensity, weather, and etcetera [2]. In addition, occupant characteristics also affect the amount of electric load consumed [3]. In a broader context, failure to predict aggregated system load

accurately has the potential to cause several impacts (such as the occurrence of transmission congestion phenomena) [4]. Such transmission congestion can create power market inefficiency that should be avoided [5].

Hence, the variety of ways to save electricity is something that needs to be researched using the latest technology developments [6]. One of them is by adding an electric load forecasting feature in the Internet of Things (IoT) smart home system. Turning a residential house into a smart home is a great way to save energy, money, increase work efficiency, automation and security. From the research point of view, investigating the hardware and software integration to predict electric load has been widely conducted. While in engineering practice, there are various ways to develop hardware, algorithms, programming languages, software, and internet platforms as the forming components for IoT smart home systems.

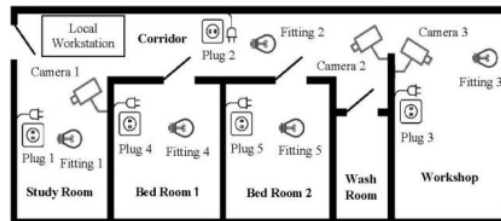


Fig. 1. IoT devices installation based on the residential house plan.

II. LOAD FORECASTING DESIGN

Variables reviewed in this study are the real-time electric current, room light intensity, number of individuals living in the house, weather conditions in terms of temperature, humidity, and wind speed, obtained from <https://openweathermap.org>. After that, the developed IoT system was tested in a residential house for a month, with the device installation layout carried out as shown in Fig. 1.

Meanwhile, the main IoT hardware components are as follows:

- IoT receptacles and fittings; ESP32 as a low-powered affordable microcontroller [7], ACS712 current sensor, and SSR electromechanical switch.

- IoT cameras; Raspberry Pi (Raspi) 3 Model B, 5 megapixel RPi Camera (E) with night vision infrared Light Emitting Diode (LED) and Light Dependent Resistor (LDR) sensor.
- Local workstation; Raspi 4 Model B, XPT2046 10.1 Inch Liquid Crystal Display (LCD) touchscreen and keyboard with an integrated touchpad.

The additional software and libraries in this design include:

- Arduino Interactive Development Environment (IDE) for ESP32 microcontroller. One of the options for programming is by connecting the computer via a mini USB data cable [7].
- Visual Studio Code (VSCode) as Python program and interface developer on the local workstation and internet website. The program can be developed with mouse-driven and is highly efficient to create program helper objects and internet applications, programs testing or debugging, and to produce ready-to-use programs.
- Raspberry Pi OS as Debian GNU or Linux-based Raspi operating system. One of the options for OS operation on the Raspi controller is by connecting the computer via Ethernet (LAN) cable [8].
- Python 3 IDE as Python-based applications developer on the Raspberry Pi OS. The user can choose two approaches to carry out the programming process [9]. The first approach is by using a text editor for scripting and executing. Then the second one is by using interactive prompts such as IDLE, IPython, and Thonny.
- Open Sources Computer Vision (OpenCV) 4, TensorFlow (for numerical computation using data flow graphs [9]), and Yolov3-Tiny as Python libraries for real-time image processing [10].
- Scikit-Learn (Sklearn) and Pmdarima as Python libraries to facilitate electric load forecast calculations.
- Matplotlib as Python library for numerical data visualizations in two dimensions (cartesian), three dimensions, or categories-based charts.

In addition, the internet platforms used in this research include:

- GitHub as a shared web service for software development using Git version control system and data storage service (hosting). This application is very popular and widely used by large companies such as Facebook, Google, and Twitter.
- Amazon Web Services (AWS) as permanent data storage on the internet server, content delivery, and other functionality based on cloud computing.

Meanwhile, from the forecasting point of view various algorithms can be used [11]. Among them are Principal Component Analysis (PCA) and Autoregressive Integrated Moving Average (ARIMA). PCA is a technique to simplify data using linear transformation to form a new coordinate system with maximum variance. PCA is used for simplification without significantly reducing the data's characteristics, thereby making it easier for interpretation [12], while ARIMA is a non-stationary model [13]. The use of ARIMA in short-term forecasting is very precise and accurate, but the accuracy for long-term forecasting is poor [14].

Mathematically, ARIMA consists of three elements combined into one, namely Autoregressive (AR), Moving Average (MA) and Integrated (I). The general form of this method is ARIMA (p, d, q), where p, d, and q denote the AR process degree, order of integrated differentiation, and MA process degree, respectively. The ARIMA model consists of three basic steps, namely the identification stage, the assessment and testing stage, and the diagnostic examination [15]. It is expected that the PCA and ARIMA hybridization provides calculation results that combine the superior properties of the two methods.

III. SYSTEM DEVELOPMENT

IoT is a concept in which an electronic object can transfer data over a network without requiring human-to-human or human-to-computer interaction [16]. While a smart home is a house whose electronic devices are connected to the IoT network to enable all household functions to be controlled wirelessly [16]. Fig. 2 shows the IoT system design developed in this research.

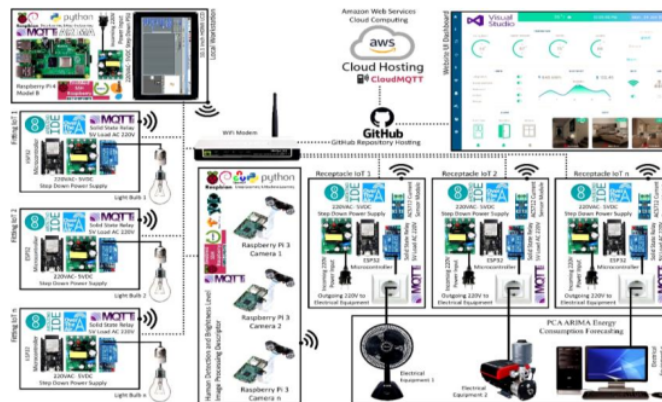


Fig. 2. IoT system design.

The hybrid PCA and ARIMA algorithm programmed in the cloud server and local workstation illustrated in Fig. 3. Fig. 4 shows the IoT camera algorithm. Having interconnected the Raspi 3 Model B with infrared LED, the camera will work both in bright and dark conditions. Added with OpenCV 4, TensorFlow, and Yolov3-Tiny, the cameras will acquire real-time datasets of light intensity and the number of humans detected. Furthermore, Fig. 5 shows the IoT receptacle algorithm. Not only used for on and off command, but the receptacle also can acquire real-time datasets of electric current using ACS712 sensor. While Fig. 6 shows the IoT fitting algorithm. Users can command the lightbulb to turn on and off remotely and watch the light intensity changing via IoT camera video. But there is no ACS712 sensor installed since the lightbulb is considered to consume a low electric load.

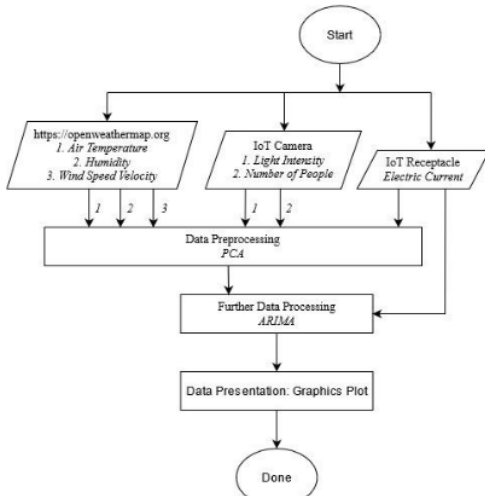


Fig. 3. Hybrid PCA and ARIMA algorithm.

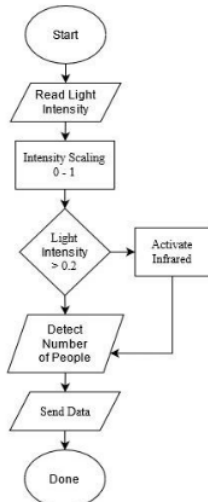


Fig. 4. IoT camera algorithm.

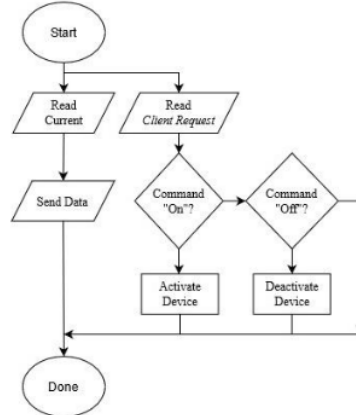


Fig. 5. IoT receptacle algorithm.

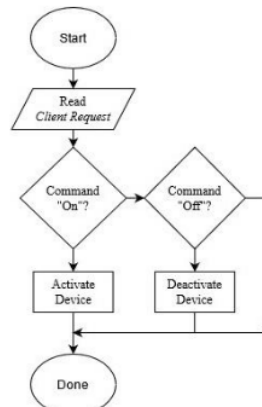


Fig. 6. IoT fitting algorithm.

And for hardware development, Fig. 7 shows the local workstation prototype. When the IoT function fails, the local workstation will act as the cloud computing and website interface backup via a private intranet network. Furthermore, Fig. 8 shows the IoT camera prototype. The Rpi camera (E) connected to Raspi 3 Model B using Camera Serial Interface (CSI) 22 pin ribbon cable. And the LDR sensor is connected via a General Purpose Input/Output (GPIO) pin.

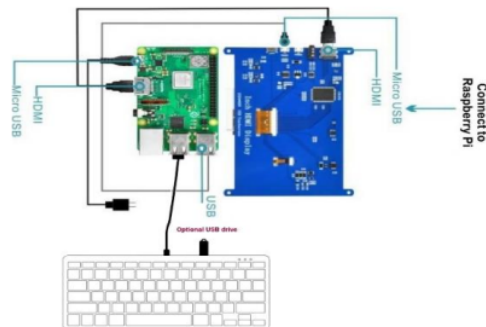


Fig. 7. Local workstation prototype.

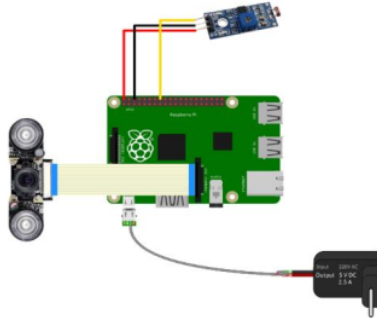


Fig. 8. IoT camera prototype.

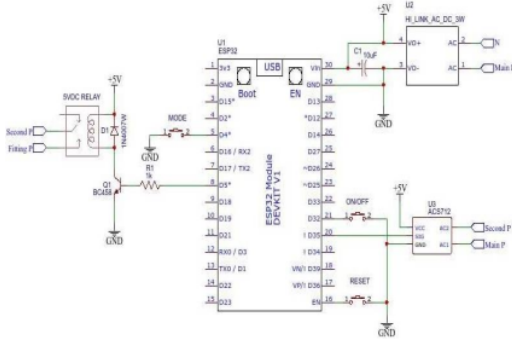


Fig. 9. IoT receptacle prototype.

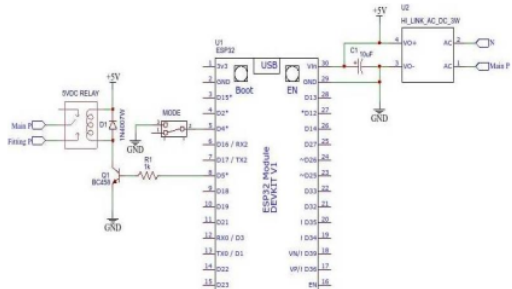


Fig. 10. IoT fitting prototype.

Moreover, Fig. 9 shows the IoT receptacle prototype. The receptacle is connected to 220 voltage sources. While the other end is connected to the male plug of household electric appliances that want to be monitored and controlled via the internet. Additionally, Fig. 10 shows us IoT fitting prototype. The lightbulb monitor and control is integrated through the website interface and its activation affects the number of light intensity variables as one of the electric load forecast datasets.

To facilitate remote revision, Over The Air (OTA) and Secure Shell (SSH) features are used on all types of hardware for updating, reconfiguring, and distributing programs over the internet. Then to optimize the data exchange efficiently, reduce the size of the data packet as small as possible, minimize the storage and machine-to-machine (M2M) computing processes; and the Message Queue Telemetry Transport (MQTT) protocol is used [17].



Fig. 11. Website interface development.

The interface information displayed on the landing page as per Fig. 11 include:

- Selection button that contains hardware list for each room
- Numeric column that shows weather condition around the residential house
- Amount and type of all hardware installed
- The total amount of the electric load
- Image frame of real-time video broadcasts recorded
- Number of people and average light intensity detected
- Table column that shows event history of all hardware over the last 24 hours
- Graphics pop-up click button that shows total people detected and average light intensity over the last 24 hours
- Graphics pop-up click button that shows weather condition around the residential house over the last 24 hours
- The numeric column that shows performance results of the IoT system
- Graphics pop-up click button of the electric load over the last 24 hours added with its (next day) forecast and accuracy.

IV. RESULTS AND ANALYSIS

A. Forecast Accuracy

The next day forecast calculation compared with the actual amount of electric load is shown in Fig. 12. To evaluate the accuracy, Mean Absolute Error (MAE), Mean Square Error (MSE), and Mean Absolute Percentage Error (MAPE) numerical calculations were used. Mean Absolute Error (MAE) is defined as validation of the suitability of the absolute forecast error average regardless of its positive or negative orientation. Meanwhile, Mean Square Error (MSE) is defined as validation of the suitability of the squared error forecast. However, MAE and MSE do not facilitate comparisons between a series of different scales due to different time intervals. Therefore, to solve these limitations, Mean Absolute Percentage Error (MAPE) was added. MAPE below 10% is considered a very accurate forecast. Whereas, MAPE between 10-20% is considered good. MAPE between 20-50% is interpreted

as a reasonable (feasible) forecast. And MAPE more than 50% is considered not accurate [18]. The MAE, MSE, and MAPE values in Fig. 12 are 0.098, 0.004, and 9.81%, respectively.

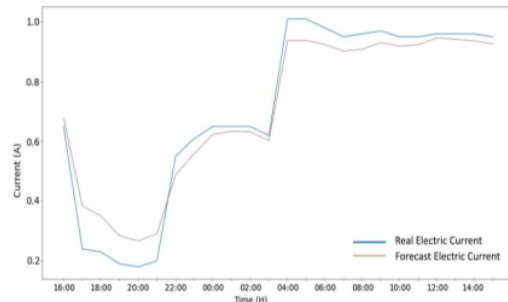


Fig. 12. Real time electric load with its next day forecast results.

B. Performance Testing

In this research, the data transmission was carried out 7433 times a day (24 hours) for a month. Then four analyses are used to test the IoT system performance, namely latency, throughput, reliability, and availability (using amazonaws.com as MQTT broker). Latency or delay is the time needed to transfer the data package from the origin to the final destination in milliseconds (ms) [19]. Throughput is the effective data transfer rate or the total number of a successful data package arrived that observed at the final destination during a specified time interval in bits per second (bps) [19]. Reliability is the percentage probability of a device performing a satisfied predetermined task for a certain period under certain conditions [20]. Meanwhile, availability is a metric used to assess the percentage possibility that the system can operate and perform its functions at a certain time [20].

The use of AWS cloud computing server led to 83.11ms latency, 360.99bps throughput, 99.765% reliability, and 99.766% availability in IoT smart home system. The latency and throughput results can be categorized according to ETSI TIPHON TR 101 329 Quality of Service (QoS). While the reliability and availability results can be categorized according to ISO / IEC 25010.

V. CONCLUSION

This work designed an electric load forecasting with the development of microcontrollers, sensors, and actuators, added with cameras, LCD touch screens, and minicomputers, to improve the IoT smart home system. The IoT receptacles and fittings succeeded to control and monitor electrical appliances via a web interface remotely. Meanwhile, the IoT cameras succeeded to publish images, process image information, and display video via a web interface remotely. Added with the local workstation (as cloud computing backup) also succeeded to perform forecast calculation, devices control and monitor via private intranet network. Whereas, the PCA and ARIMA provide a very accurate short-term forecast for the household electric load. Moreover, the IoT smart home

system performance provides excellent data package transfer speed and delivery.

7

CONFLICT OF INTEREST

The authors declare no conflict of interest.

AUTHORS CONTRIBUTIONS

Hamdi W. Rotib executes hardware and software development according to research purposes and wrote all documentation report; Muhammad B. Nappu acted as the project leader to ensure excellent research result; Zulkifli Tahir acted as the software development supervisor; Ardiaty Arief acted as the mathematics method approaches advisor; Muhammad Y. A. Shiddiq assists hardware and software development execution according to user requirement.

REFERENCES

- [1] B. Rossi and S. Chren, "Smart grids data analysis: A systematic mapping study," *IEEE Trans. on Industrial Informatics*, vol. 16, no. 6, pp. 3619-39, 2020.
- [2] H. Johra, A. Marszal, J. R. Ellingsgaard, and M. Liu, "Building energy flexibility: A sensitivity analysis and key performance indicator comparison," *Journal of Physics: Conf. Series*, vol. 1343, 2019.
- [3] P. F. Pereira, N. M. M. Ramos, and J. M. P. Q. Delgado, *Intelligent Residential Buildings and the Behaviour of the Occupants: State of the Art*, 1st ed. Cham: Springer, 2019.
- [4] M. B. Nappu, A. Arief, and R. C. Bansal, "Transmission management for congested power system: A review of concepts, technical challenges and development of a new methodology," *Renewable and Sustainable Energy Reviews*, vol. 38, pp. 572-80, 2014.
- [5] M. S. D. Putra, M. B. Nappu, and A. Arief, "Investigation of non-conventional methods for combined economic emission dispatch problem," *Journal of Physics: Conf. Series*, vol. 1341, 2019.
- [6] E. L. Q. Santos, J. C. D. Bautista, M. W. S. Estanque, C. J. B. Paloa, and A. B. A. Villaran, "Development of an IoT-based water and power monitoring system for residential building," *Indonesian Journal of Electrical Engineering and Computer Science*, vol. 22, no. 2, pp. 136-43, 2021.
- [7] N. Kolban, *Kolban's Book on the ESP32 & ESP8266*, Canada: Leanpub, 2018, pp. 396-510.
- [8] S. Monk, *Programming the Raspberry Pi: Getting Started with Python*, 3rd ed. New York: McGraw-Hill, 2021.
- [9] Y. Toleubay and A. P. James, "Getting started with TensorFlow deep learning," in *Deep Learning Classifiers with Memristive Networks. Modeling and Optimization in Science and Technologies*, A. James Ed. vol. 14, Cham: Springer, 2020.
- [10] J. Redmon and A. Farhadi, "YOLOv3: An incremental improvement," *Computer Science*, arXiv: 1804.02767, 2018.
- [11] A. Arjmand, R. Samizadeh, and M. D. Saryzadi, "Improved forecasting of short term electricity demand by using of integrated data preparation and input selection methods," *Journal of Energy Management and Technology*, vol. 3, pp. 48-57, 2019.
- [12] S. Yinsheng, L. Chunxiao, L. Bao, D. Weisi, and Z. Peishen, "Principal component analysis of short-term electric load forecast data based on grey forecast," *Journal of Physics: Conf. Series*, vol. 1486, 2020.
- [13] S. Pasari and A. Shah, "Time series auto-regressive integrated moving average model for renewable energy forecasting," *Enhancing Future Skills and Entrepreneurship*, Cham: Springer, pp. 71-77, 2020.

- [14] F. Mahia, A. Dey, M. A. Masud, and M. S. Mahmud, "Forecasting electricity consumption using ARIMA model," in *Proc. Int. Conf. on Sustainable Technologies for Industry 4.0*, 2019, pp. 1-6.
- [15] A. Nielsen, "Practical time series analysis: Prediction with statistics and machine learning," *O'Reilly Media*, pp. 163-204, 2019.
- [16] A. Malik, T. Magar, H. Verma, and M. Singh, "A detailed study of an Internet of Things (IoT)," *Int. Journal of Scientific & Technology Research*, vol. 8, no. 12, pp. 2989-2994, 2019.
- [17] S. Sharma, H. B. Patel, and B. Shrimali, "Achieving energy efficiency using green internet of things through incorporation of machine learning architecture," *Int. Journal of Computer Applications*, vol. 179, no. 23, pp. 26-33, 2018.
- [18] Y. W. Lee, T. K. Gaik, and C. Y. Yee, "Forecasting electricity consumption using time series model," *Int. Journal of Engineering and Technology*, vol. 7, pp. 218-23, 2018.
- [19] P. Porambage, J. Okwuibe, M. Liyanage, M. Yliantila, and T. Taleb, "Survey on multi-access edge computing for internet of things realization," *IEEE Communications Surveys & Tutorials*, vol. 20, no. 4, pp. 2961-91, 2018.
- [20] S. Pokorni, "Reliability and availability of the internet of things," *Military Technical Courier*, vol. 67, p. 588, 2019.

Copyright © 2021 by the authors. This is an open access article distributed under the Creative Commons Attribution License ([CC BY-NC-ND 4.0](https://creativecommons.org/licenses/by-nc-nd/4.0/)), which permits use, distribution and reproduction in any medium, provided that the article is properly cited, the use is non-commercial and no modifications or adaptations are made.



Hamdi W. Rotib graduated majoring physics engineering from Institut Teknologi Bandung in 2009. Experienced as system engineer, completed many procurement, construction and commissioning projects around Indonesia peninsula. Keywords of expertise are hardware and software development, power and control system design, fabrication, programming and integration. Concurrently active as member of the Indonesia Engineer Association (PII), Indonesia Entrepreneur Association (APINDO) and Indonesia Marketing Association (IMA).



Muhammad B. Nappu received B. Eng. with honors from Hasanuddin University in 1999 and Master degree from Institut Teknologi Bandung, in 2001. He pursued his Master of Philosophy and Doctor of Philosophy degrees at the University of Queensland, Brisbane, Australia in 2009 and 2013, respectively. He has published more than seventy publications in form of book chapter, research reports, journal papers, and international conference papers. He is currently leader at the Centre for Research Development on Energy & Electricity since 2016 and get involved in a number of projects predominantly for the Indonesian State Electricity Corporation, PT. PLN (Persero).

Dr. Nappu is also working at the United States Agency for International Development (USAID) to support (both) Indonesian Clean Energy Development (ICED) programs and Scaling-Up Renewable Energy (SURE) project. Besides, Dr. Nappu has been serving as a consultant for Asian Development Bank (ADB) in performing technical assistance to support sustainable and universal electricity access in Indonesia, as part of electricity grid development program for Sumatera, Sulawesi & Nusa Tenggara islands. His research interests include electrical power systems operation and analysis, forecasting, planning, integration of renewable energy as well as optimization in a competitive electricity market.



Zulkifli Tahir received B. Eng. from Institut Teknologi Telkom in 2006, Master degree in industrial computing from Universiti Teknikal Malaysia and doctoral degree in computing engineering from Ehime University. Published more than twenty publications in form of book chapter, research reports, journals and international conference papers. Currently active as lecturer at the Hasanuddin University. Research interest include decision support system, artificial intelligence, distributed computer network and applied multimedia.



Ardiaty Arief received B. Eng. degree in electrical engineering as first class honor from Hasanuddin University, M. T. M. degree from the University of New South Wales in 2004, and Ph. D. degree in power systems stability from the University of Queensland. Concurrently active as lecturer in electrical engineering and technical expert at the Centre for Research Development on Energy & Electricity at the Hasanuddin University. Involves in the international collaboration with Australian institutions through the Reliable, Affordable, Clean Energy (RACE) for 2030 program, and served as consultant at the Renewable Energy Technologies for Eastern Indonesia Workshop in 2019-2020 by Australia Award Indonesia. Research interests include power system planning, stability and reliability, load modeling and computational intelligence with its application in power system engineering.



Muhammad Y. A. Shiddiq received B. Eng. majoring computer system from Universitas Komputer Indonesia in 2019. He experienced in the embedded system research, participated in development of digital bookkeeping system for beverage products and currently involved in various organizations concerning startup business activity. He started the Mentari Grand Land Project at South Sulawesi in 2020 as the first Sharia residence in Eastern Indonesia equipped with IoT smart home system 100% made locally by Indonesian.

ORIGINALITY REPORT

12%

SIMILARITY INDEX

8%

INTERNET SOURCES

9%

PUBLICATIONS

5%

STUDENT PAPERS

PRIMARY SOURCES

1	Submitted to Jordan University of Science & Technology Student Paper	4%
2	M Darwis, I C Gunadin, S M Said. "Study of power flow in electricity system using extreme learning machine", IOP Conference Series: Earth and Environmental Science, 2021 Publication	2%
3	zenodo.org Internet Source	1%
4	www.science.gov Internet Source	1%
5	Submitted to Ngee Ann Polytechnic Student Paper	1%
6	ijair.id Internet Source	1%
7	www.scielo.br Internet Source	<1%
8	research.utwente.nl Internet Source	<1%

9

Darshana Thomas, Ross McPherson, Greig Paul, James Irvine. "Optimizing Power Consumption of Wi-Fi for IoT Devices: An MSP430 processor and an ESP-03 chip provide a power-efficient solution", IEEE Consumer Electronics Magazine, 2016
Publication

<1 %

10

ckyyb.crsri.cn
Internet Source

<1 %

11

scirp.org
Internet Source

<1 %

12

www.hindawi.com
Internet Source

<1 %

13

www.mdpi.com
Internet Source

<1 %

14

Nur Ilmayasinta. "FORECASTING ARRIVAL OF FOREIGN TOURISTS USING SEASONAL ARIMA BOX-JENKINS", BAREKENG: Jurnal Ilmu Matematika dan Terapan, 2021
Publication

<1 %

15

Victor Netes. "Modern Network Technologies and Dependability", 2020 International Scientific and Technical Conference Modern Computer Network Technologies (MoNeTeC), 2020
Publication

<1 %

16

Liudong Xing. "Reliability in Internet of Things: Current Status and Future Perspectives", IEEE Internet of Things Journal, 2020

Publication

<1 %

Exclude quotes On

Exclude matches < 5 words

Exclude bibliography On