

IJETT-V70I11P211.pdf

by

Submission date: 16-Jan-2023 07:15AM (UTC+0700)

Submission ID: 1993225398

File name: IJETT-V70I11P211.pdf (806.26K)

Word count: 6113

Character count: 32819

Original Article

Spatial Distribution of Livestock Wastewater Pollution and its Treatment in Saddang Watershed

Reni Oktaviani Tarru¹, Sumbangan Baja², Farouk Maricar³, Rita Tahir Lopa³

^{1,3}Department of Civil Engineering, Hasanuddin University, Makassar, Indonesia

²Department of Soil Science, Faculty of Agriculture, Hasanuddin University, Makassar, Indonesia

¹Corresponding Author : tarruro17d@student.unhas.ac.id

Received: 13 August 2022

Revised: 04 November 2022

Accepted: 07 November 2022

Published: 26 November 2022

Abstract - The Saddang River is the principal river in the Saddang Watershed (DAS) with degraded water quality. Sources of pollution include residential neighbourhoods, industries, and commercial districts. In addition to being a site for exchanging basic necessities, the livestock market is also a specialised area for dealing with animals, particularly buffalo and pigs. Due to improper waste management, the enormous quantity of animals harms the ecosystem. Animal waste runs directly into natural and manmade channels leading to the Saddang river, which is just 64 metres from the livestock market. Therefore, actions must be taken to improve waste treatment technology and lessen the pollution burden. This research consists of determining the spatial distribution of waste pollution or waste distribution patterns using a Geographic Information System (GIS) application, beginning with initial sampling at five stations on the Saddang River, one at the outlet. The sample is tested in the laboratory and the results are validated by determining water quality standards based on the Pollution Index according to Decree No. 11 of the Minister of the Environment. Using organisms to break down livestock waste with Gambas, Zeolite, Bio-ball, Jap mat, and water bamboo plants as buffer media, a reactor with a biofilter and phytoremediation system is used for waste treatment. The results demonstrated that waste treatment with biofilter and Phytoremediation systems effectively reduced waste for physical parameters, namely Dissolved Residue (TDS) of 78.64 percent, Suspended Solids (TSS) of 97.93 percent, Turbidity of 96.90 percent, for parameters Chemical COD of 97.69 percent, DO of 98 percent, Nitrate of 29.29 percent, Ammonia of 66.35

Keywords - Biofilter, Effectiveness, Phytoremediation, Water quality, Livestock waste.

1. Introduction

Changes in land use reflect the influence of human activities on the environment, which determines the quantity of accessible land. Water is becoming more scarce, and pollution affects the quantity of water required by the population. The Saddang River in North Toraja Regency was affected by this event. The Saddang River is interprovincial (South Sulawesi and West Sulawesi Provinces). The Regional Drinking Water Company (PDAM) utilises Saddang river water as a supply of raw water for various purposes [1]. As a result of pollution from residential and non-domestic trash, the water quality of a river degrades. The cattle trade center, which is one of the main traditional marketplaces in Indonesia, is one of the causes of pollution [2]. Buffaloes and pigs are the most often sold animals since they are strongly associated with the local community's traditional festivities, and this livestock market is also a tourist attraction due to its distinctiveness, such that it has become one of the symbols of northern Toraja [3]. Tourists come directly to see many varieties of buffalo and pigs. However, the vast quantity of animals generates environmental issues due to improper waste management [4]. This study aims to analyse the water quality in the Saddang

watershed using the Pollution Index method, determine the spatial distribution of livestock wastewater pollution, and treat livestock waste by using a waste treatment unit with a specialised treatment process.

2. Literature Study

A watershed is a geographical region defined by natural separators in the form of mountain ridges that collects and drains precipitation, sediment, and nutrients to the ocean through the main river. Beneficiaries of the area's cohesive ecology include both natural and human resources. In general, the watershed ecosystem is separated into upstream, middle, and downstream regions that are connected biophysically via the hydrological cycle, with the upstream region serving to safeguard the other regions. Rivers are natural bodies of water through which precipitation and wastewater flow to the ocean, constituting biotic and abiotic environments. Government Regulation No. 35/1991 defines a river as a site, a container, and a network for the flow of water from springs to sound, confined to the right and left and so long as the flow is by a boundary line. In other words, changes in land use reflect the influence of human activities on the environment, which



increases the quantity of water that is accessible. The longer it continues to deplete and become polluted, the greater the effect on the community's water supply. The Saddang River in North Toraja Regency was affected by this event. The Saddang River is interprovincial (South Sulawesi and West Sulawesi Province). In the National Spatial Plan (RTRWN), North Toraja is designated as a protected forest region in South Sulawesi. Geographically, it is one of the districts with hilly terrain and forest-dominated land use. This causes the water supply potential to be sufficient for meeting water requirements. As a result of pollution from residential and non-domestic trash, the water quality of a river degrades. Sources of pollution include residential neighbourhoods, industries, and commercial districts. In addition to a site for exchanging basic necessities, the livestock market is also a specialised area for dealing with animals, particularly buffalo and pigs. In addition to being a source of the regional revenue, this cattle market is also a tourist attraction due to its distinctiveness, which benefits the government and community of North Toraja Regency significantly. Due to improper waste management, the enormous quantity of animals harms the ecosystem. Waste from livestock is dumped directly into natural and artificial channels leading to the Saddang River, which is 64 metres from the livestock market; therefore, it is necessary to take steps to develop processing technology and conserve water resources by determining the distribution of pollutants caused by livestock waste and determining management methods so that conservation Water Resources in the form of protection of river restoration sections and their watersheds, so that the river can be restored so that the livestock market can continue to operate.

The following steps provide the foundation for assessing the geographical distribution of livestock wastewater contamination and its treatment in the Saddang Watershed (DAS)[1]:

- Analyze water quality based on pollution-related criteria.
- Calculating the river's pollutant load using the Pollution Index (IP) technique.
- Determine the distribution or distribution pattern of pollution caused by livestock market waste.
- Construct a treatment facility for livestock waste.

2.1. River Water Quality in terms of Pollution Parameters

Based on Government Decree No. 82 of 2001 of the Republic of Indonesia of Water Quality Management and Water Pollution Control and its application Water that satisfies the standards, mainly those of Physics, Chemistry, and Biology, where the physical requirements are Temperature, TDS, TSS [5]; chemical requirements are pH, BOD, COD, DO, NO₃, NH₄-N, Nitrite; and biological terms

are Fecal Coliform, Total Coliform. The criteria for river water quality consist of [6]:

- Class I: Water whose categorization may be used for drinking water, raw water, or similar uses.
- Class II: Water whose classification is utilised for water recreation infrastructure/facilities, water fish culture, animal husbandry, plant irrigation, or other designations requiring the same water quality as those uses.
- Class III: water designated for freshwater fish culture, animal husbandry, water for irrigating crops, or similar applications.
- Class IV: water that may be used for irrigating crops and other uses that need the same water quality [7].

2.2. River Water Quality in terms of Pollution Parameters

Management of water quality based on the Pollution Index (IP) may provide feedback to decision-makers for evaluating the quality of water bodies for a designation and taking action to improve quality if quality declines due to the presence of pollutant compounds [8]. Evaluation of the value of the Pollution Index:

- 0 ≤ IP ≤ 1,0 = good,
- 1,0 < IP ≤ 5,0 = slightly polluted,
- 5,0 < IP ≤ 10 = fairly polluted,
- IP > 10,0 = heavily polluted [9]

Pollution Index Equation:

$$PI_j = \sqrt{\frac{(C_i/L_{ij})^2_M + C_i/L_{ij})^2_R}{2}} \dots\dots(1)$$

Where :

L_{ij} = concentration of water quality parameters listed in the Quality Standard of a Water Designation (j),

C_i = concentration of water quality parameters (i) obtained from the analysis of water samples at a sampling location from a river channel, measurement results

PI_j = Pollution Index for allotment (j) which is a function of C_i/L_{ij} [10].

River pollution load is the concentration of a polluting element in river water or water pollution, which is the introduction or integration of organisms, chemicals, energy, or other components into the water as a consequence of human activity [11], resulting in a decrease in water quality that renders the water unusable. based on its designation [12]. This wastewater contains excrement, urine, and washing water obtained from living creatures, such as manure from cattle.

27
Based on Minister of the Environment of the Republic of Indonesia Regulation No. 5 of 2014 [13].

2.2.1. Buffalo Liquid Animal Waste

According to the Central Statistics Agency of South Sulawesi in 2013, there were at least 90,642 buffalo. This necessitates discussion of the buffalo cow industry since the processing of buffalo cattle creates waste that may contribute to environmental damage. The chief sources of pollution generated by buffalo livestock waste are liquid waste in the form of animal-washing water, storage-cage-cleaning water, and urine. While solid waste consists of uneaten feed and faeces, liquid waste comprises urine and other bodily fluids [14].

2.2.2. Pig Livestock Liquid Waste

According to data compiled by the Central Statistics Agency of South Sulawesi in 2014, there were at least 60,860 pigs. The organic content of pig farm wastewater is due to the properties of pig farm waste. The wastewater consists of urine, faeces, food leftovers, and water used for cleaning cages [15].

2.3. Determine the Pattern of Pollutant Dispersion Caused by Cattle Market Waste

The Geographic Information System (GIS) application is used to identify the distribution pattern or geographical distribution of animal market waste contamination [16]. GIS is a computer-based technology and methodology for the collection, administration, analysis, and display of geographic data. After collecting data using the Pollution Index Scoring method [Equation 1], this application depicts the waste distribution pattern in the Saddang River. The location of the proposed waste treatment facility close to the cattle market is determined by the findings of the GIS programme.

2.4. Animal Waste Treatment Building to Reduce River Water Quality Degradation

2.4.1. Model for Wastewater Treatment

The Wastewater Treatment Building Model Comprises [17]:

- The purpose of an equalisation tank is to limit and regulate variations in the flow of liquid waste, in terms of both quantity and quality, as well as to homogenise the concentration of liquid waste [18].
- Body for Preliminary Settlement: At this step, the wastewater is processed into a settling basin to minimise the waste's suspended particles [19].
- Biofilter Tub: A biofilter is a tank for treating wastewater using microorganisms. During the biofilter process, wastewater is drained into a biological reactor or tub containing a buffered media for the growth of microorganisms.

- Final Settlement, water from the biofilter is precipitated for four hours prior to Phytoremediation and Plant-free treatment [20].
- Phytoremediation tubs and non-Phytoremediation tubs are tubs containing plants and tubs containing merely wastewater from the final sedimentation tank.

2.4.2. Wastewater Treatment

The purpose of liquid waste treatment is to remove or isolate contaminants. There are three kinds of liquid waste treatment: physical, chemical, and biological [21]. Physical Treatment: The objective of physical treatment is to remove unwanted chemicals from water without employing chemical or biological reactions [28]; only physical procedures are used. Biological treatment is a wastewater treatment procedure that leverages the growing activity of microorganisms that come into touch with wastewater so that they may use existing polluting organic bacteria as food components and disintegrate or stabilise them under certain environmental circumstances [23]. In this research, wastewater is treated using a combination of physical and biological treatment [24] by filtering the waste treatment building, beginning with the equalisation building and ending with the initial deposition building. Biological wastewater treatment with a biofilter and phytoremediation technology. The Biofilter houses the expansion of degrading microorganisms by using organic and inorganic materials as a buffer medium for the proliferation of microorganisms, namely Jap-mat, Gambas, Zeolite Sand, and Bio-ball. The flow system is conducted in a downward direction (from top to bottom) to facilitate gravity filtering and the formation of biofilm sludge by microorganisms [25, 26], and the Phytoremediation Method, a system in which certain plants collaborate with microorganisms in the water to convert contaminants into less or harmless substances [27].

3. Materials and Methods

3.1. Type of Research

The sort of research used is field research and laboratory sample testing. To obtain research data, the data source is primary data obtained directly from the field by sampling at 6 points in the Saddang river, where 3 sample points are upstream, 2 sample points are downstream, and one sample point is at the river's outlet; and waste sampling livestock from the simulation results of physical models in the field before and after being processed and then tested by the Makassar Plantation Product Industry Laboratory (BBIHP), animal wastewater discharge dilution. The DEMNAS 2013-22v1.0 will be used in the process of identifying the distribution of animal waste and RBI maps in SHP format, coordinates for samples in rivers, photographs of research areas, and the quantity of buffalo and pigs on the market.

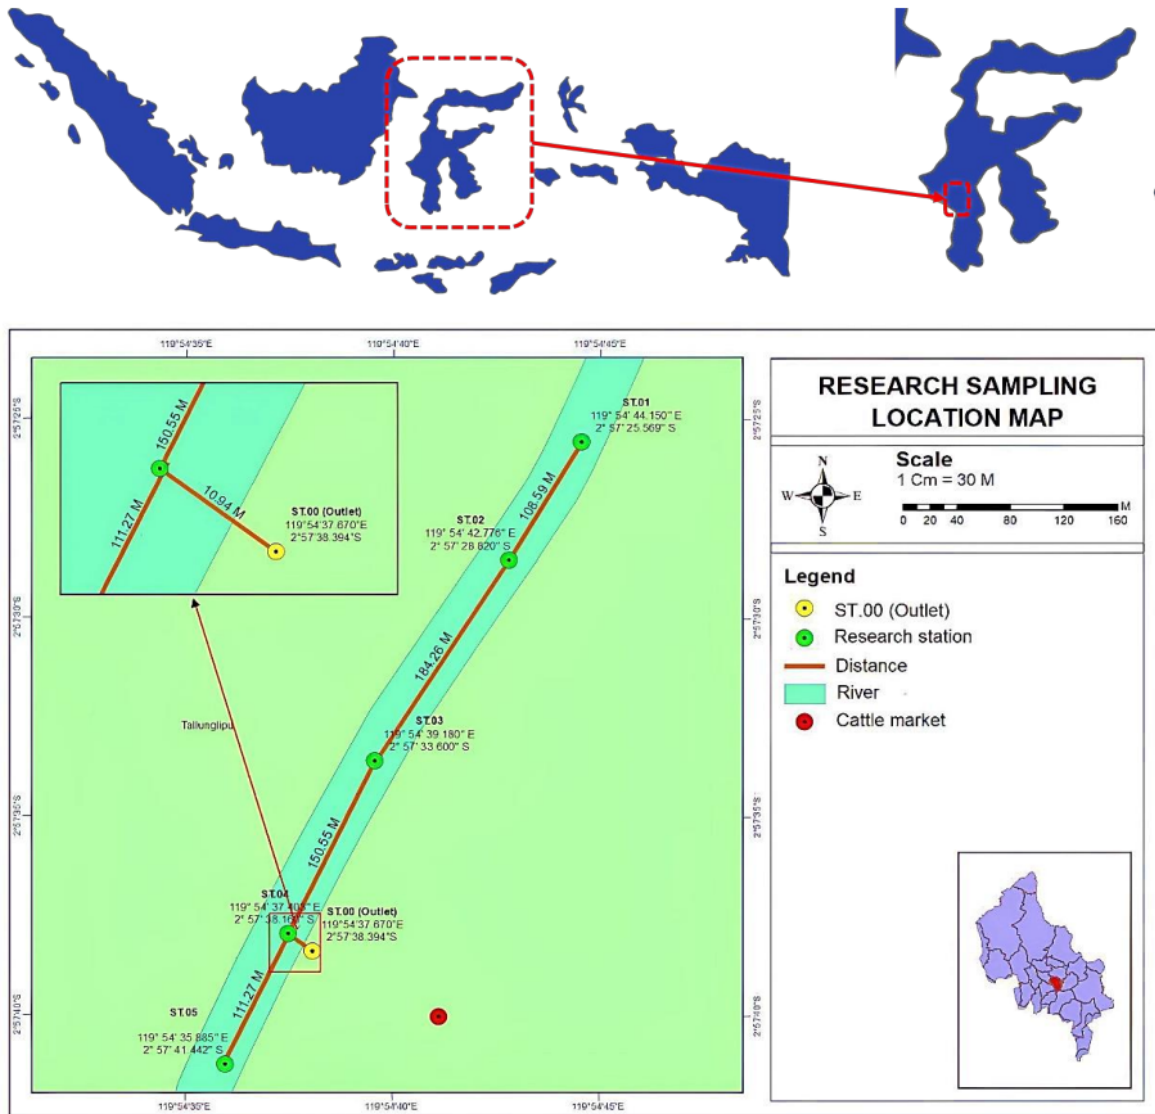


Fig. 1 Sampling Location Map

3.2. Research Parameter

This study used Biofilter as a buffer medium, using jap mat material of 50 by 50 centimetres, gambas measuring 20 to 30 centimetres, Zeolite Sand measuring 4.75 millimetres, Bio Ball measuring 3 centimetres in diameter, and water bamboo plants for phytoremediation. The utilised equipment and materials are reactor units built of stone masonry, and the arrangement of the tubs starts with an equalisation tank measuring 80 cm by 153 cm by 60 cm, followed by an initial depositing basin measuring 90 cm by 153 cm by 60 cm. The

biofilter tub I am split into 2 rooms with dimensions of 100 cm by 140 cm by 60 cm, each containing gambas buffer media for the first room and Jap-mediated buffer media for the second room. To collect data, the initial sample (inlet) and the last sample (exit) of animal waste processed in the waste treatment plant are collected. 14 days after going through a method starting with the eculization tank and concluding with the final deposition basin by calculating the residence time in the Phytoremediation tank with a 7-day dwelling period, the sample was tested in the laboratory.

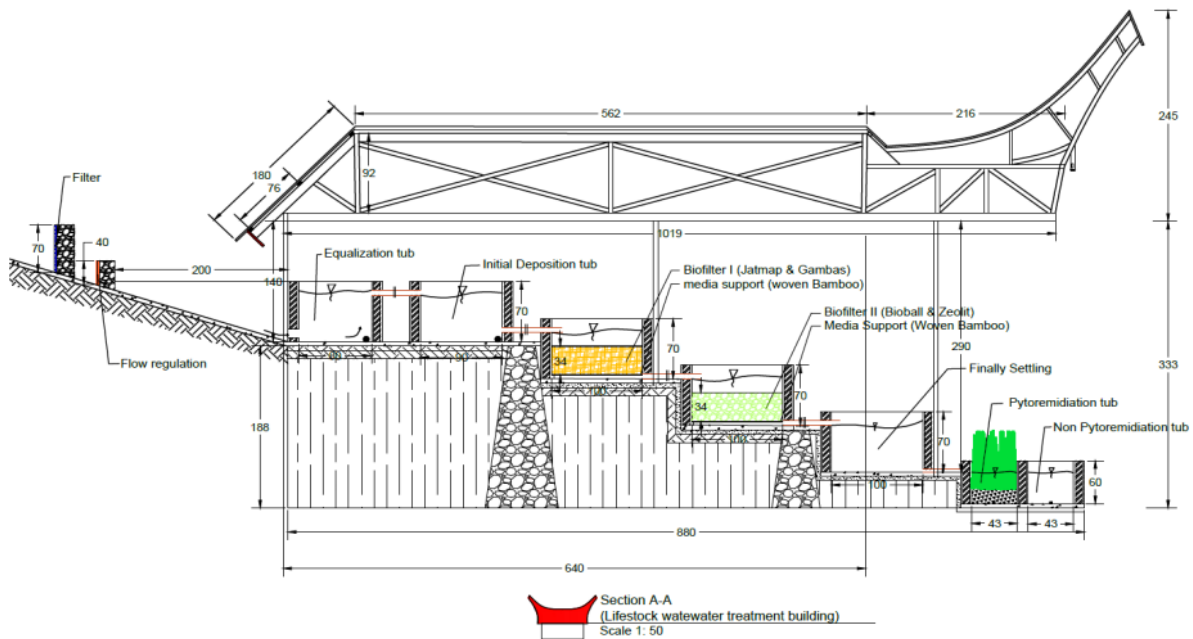


Fig. 2 Waste treatment building

The collection of data included many processes, including the assessment of the liquid waste's fundamental characteristics, the collection of samples of Saddang river water, and laboratory testing. Then, determine the water quality condition using the Pollution Index method and input the data from the analysis of the pollution index into the GIS application to determine the distribution pattern or distribution of wastewater pollution in the Saddang River. The variables analysed are the liquid waste intake and output of a sewage treatment plant equipped with biofilters and phytoremediation.

4. Results and Discussion

The factors determining the spatial distribution of livestock waste pollution and its treatment in the Saddang watershed are the decrease in the quality of Saddang river water due to the burden of livestock waste pollution; the pattern of waste distribution that indicates the river is heavily polluted; the residence time in the livestock waste treatment building; and the effectiveness of the media buffering gambas, jap-mat, zeolite, bio-ball, and water bamboo plants.

4.1. Water Quality Status Determination Analysis

Laboratory parameters included temperature, TDS, DO, dissolved residue (TDS), suspended solids (TSS), turbidity, chemical parameters (pH, BOD, COD, DO, nitrate (NO₃), ammonia (NH₄-N), nitrite (NO₂)), and biological parameters (Fecal Coliform, Total Coliform). Based on Table 3, which displays the laboratory-tested river water sample, the water

quality status is assessed using the Pollution Index (IP) approach by comparing each parameter's value to its respective quality criteria. The example calculation for the pollution index based on equation 1 is ST.01.

7

The outcomes of identifying the status of water quality at ST.0 (inlet) are shown in Table 2, which is followed by the Recapture of the Status of Water Quality in the Saddang River Using the IP Method. According to Table 3, the water quality along the Saddang River is heavily polluted upstream at station ST.01; moderately polluted upstream at station ST.02; moderately polluted upstream at station ST.03; heavily polluted downstream at stations ST.04 and ST.05; and heavily polluted at station ST.01, which is located at the river's outlet.

4.2. Waste Distribution Pattern

Using a Geographic Information System (GIS) application, determining the distribution pattern or spatial distribution of liquid waste in the Saddang River by digitising the Indonesian Earth Map (RBI) in Tallunglipu District using DEM Data (Digital Elevation Model) DEMNAS 2013-22v1.0, scoring for each water quality parameter data from field research that has been analysed by the laboratory, and the results of determining the status of water quality with a pollution indicator Plotting the coordinates of the research station's location to create a map of the distribution of each water quality parameter so that a map of the distribution zone of livestock waste pollution can be created by entering the Pollution Index method score results.

Table 1. Test results for each station

No	PARAMETER	UNIT	Sample Code						Water quality Standard PP No.82 Thn 2001
			23 ST.00	ST.01	ST.02	ST.03	ST.04	ST.05	
I. PHYSICS									
1	Temperature	C	25,9	27,2	28	27,7	27,7	27,7	Temperature ± 3
2	Total Dispended Solids (TDS)	Ppm	11,1	3,45	0,1	0,84	9,95	1,59	1000
II. CHEMICALS									
3	Potential Hydrogen (pH)	-	7,12	6,93	7	6,98	7,02	6,67	6—9
4	Dissolved Oxigen (DO)	Ppm	3,21	3,04	2,9	1,9	0,48	0,36	6
5	Biochemical Oxygen Dermand (BOD)	Ppm	2278,3	2298	131	0,65	0,98	3,92	2
6	Chemical Oxygen Demand (COD)	Ppm	5695,7	1,63	2,5	9,79	5745	326	10
7	Nitrate (NO1)	Ppm	0,951	Tt	0	Tt	1,38	0,03	10
8	Nitrite (NO2)	Ppm	1,158	0,01	0	0,01	1,3	0,06	0,06
III. MICROBIOLOGY									
9	Total Coliform	colony/100ml	>1100	>1100	>1100	>1100	>1100	36	1000
10	<i>E.coli</i>	colony/100ml	160	3500	17	3500	43		100

Table 2. Results of Saddang River Water Quality Status at the first Station (ST.01) with Pollution Index

NO	PARAMETER	Unit	Lij	Ci	Ci/Lij	Ci/Lij new	
1	Temperature	°C	Normal ± 3	25,9	8,63	5,68	
2	Total Dispended Solids (TDS)	Ppm	1000	11,1	0,01	0,01	
3	Derajat keasaman (pH)	-	06-Sep	7,12	-0,25	-0,25	
4	Dissolved Oxigen (DO)	Ppm	6	3,21	2,64	3,11	
5	Biochemical Oxygen Dermand (BOD)	Ppm	2	2278,3	1139,15	16,28	
6	Chemical Oxygen Demand (COD)	Ppm	10	5695,68	569,57	14,78	
7	Nitrate (NO1)	Ppm	10	0,951	0,10	0,10	
8	Nitrite (NO2)	Ppm	0,06	5695,68	94928,00	25,89	
9	Total Coliform	colony/100ml	1000	>1100	1,10	1,21	
10	<i>E.coli</i>	colony/100ml	100	160	1,60	2,02	
						Amount	68,82
						Average	6,88
						Max	25,89
						IP	18,94
Water quality Status			Heavy polluted				

Table 3. Recap of Saddang River Water Quality Status with IP

Point	Upstream Distance (m)	IP Score	Quality Status
ST.01	0	11.79	Heavy Polluted
ST.02	108.59	7.28	Moderately Polluted
ST.03	292.85	6.34	Moderately Polluted
ST.04	443.4	10.74	Heavy Polluted
ST.05	554.67	12.17	Heavy Polluted

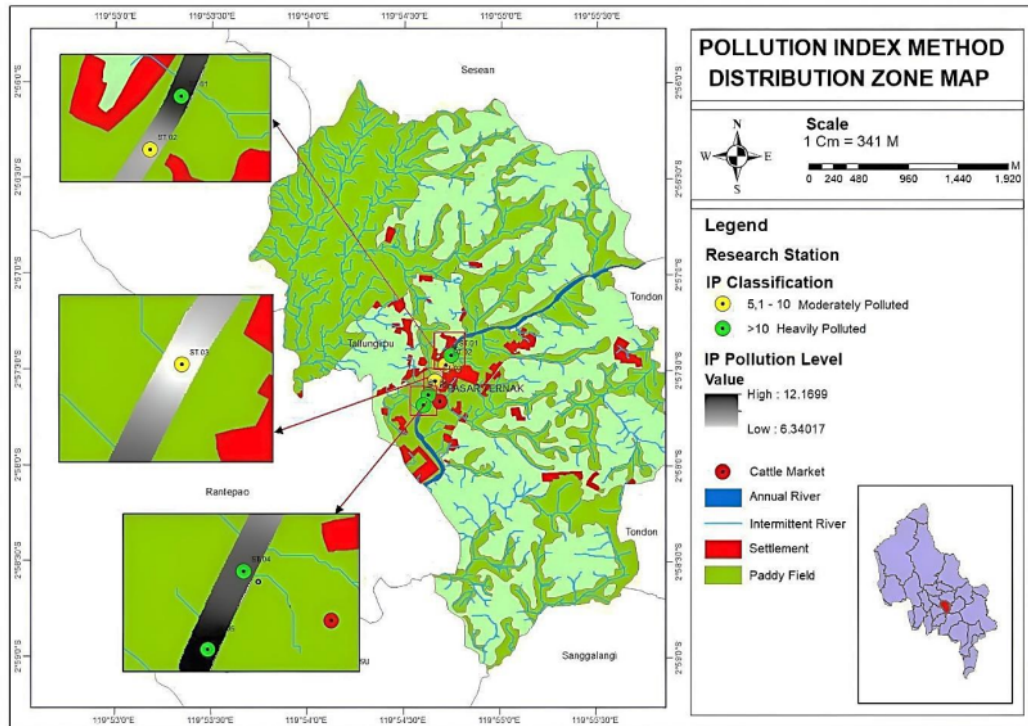


Fig. 3 Distribution Zone Map

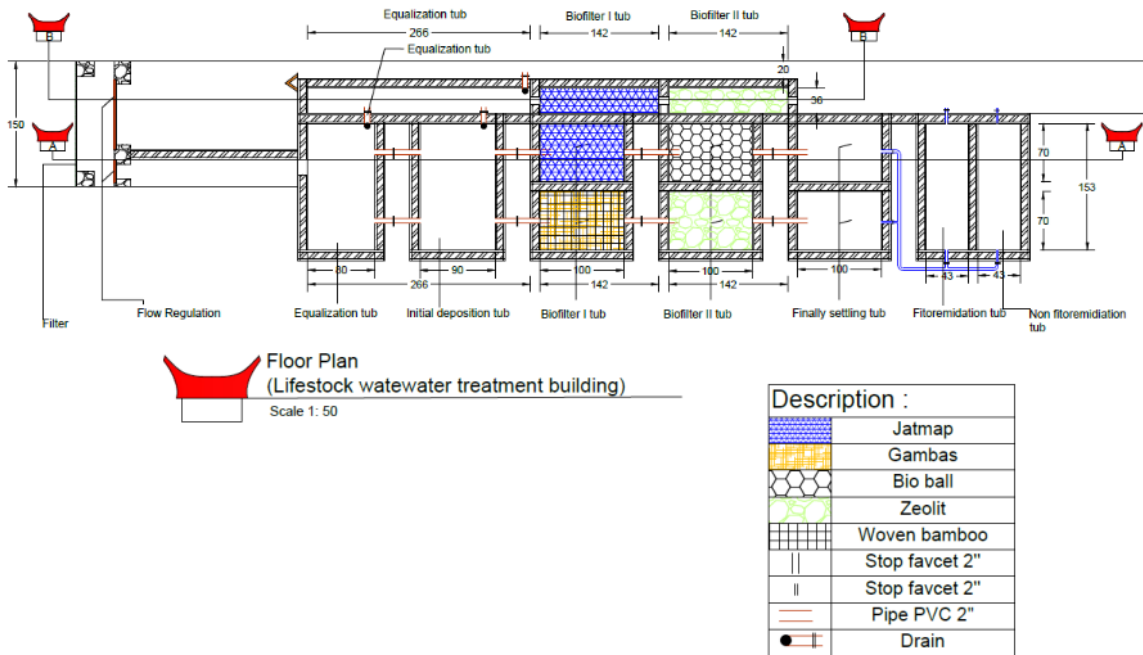


Fig. 4 Waste Treatment Building

4.3. Waste Treatment Building

Based on the distribution zone map of livestock waste, it is important to construct a treatment facility and waste processing technology to decrease the pollution load by first estimating the discharge of livestock and pig wastewater. The average discharge over three days is 498.53 m³/day. The size of the processing building may be established using the original discharge data. The equalisation tank, the initial deposition tank, the biofilter tank I, the biofilter tank II, the final sedimentation tank, and the phytoremediation tank are all split into two rooms. Then for the biofilter tank II, the zeolite media is absorbent because zeolite has extremely big pores that can collect tiny particles, and Bio-Baal serves as a medium for microorganisms or bacteria to live.

Microorganisms in this context are helpful bacteria that break down trash. To ease biofilter tub processing, each biofilter tub is equipped with bamboo media as a support for the buffer media. The purpose of the phytoremediation tank is to remove or decrease toxins using the following process: Before the wastewater enters the treatment tank, the solid waste is kept using an iron filter, and samples of the wastewater are obtained for further study of chemical, physical, and biological parameters in the laboratory.

Figure 4 depicts the treatment procedure, namely the equalisation tank with a 4-hour residence duration. To steady the flow, the wastewater is pumped into the tank until it is full. When the equalisation tank is full, the wastewater is sent to the first settling basin by opening the equalisation tank's faucet until the wastewater is full. It is deposited in the first sedimentation tank for a specified residence period of 5 hours

before being flowed into the biofilter tank, which is separated into two rooms, each of which has been filled with Gambas and Jap-mat media for a predetermined residence time of 5 hours. The water from the biofilter tub I is then pumped to the next treatment, the biofilter tub II, which is separated into two chambers and loaded with Zeolite and Bio-ball media with a 5-hour residence period. The final deposition is the following treatment phase. The water is dumped in the final settling basin for 5 hours after passing through the biofilter II. Following the deposition procedure, the sample is sent to the laboratory for examination. After passing through the last sedimentation tank, the treated water flows into the phytoremediation tank, which is likewise separated into two tanks: tub 1 with water bamboo plants and tub 2 without plants. The sample is obtained for subsequent examination in the laboratory, and it is then kept for another 7 days, for a total of 14 days for testing in the laboratory.

4.4. Effectiveness of Waste Treatment on Initial Sample (Inlet) and Final Sample (Outlet)

According to the table, the efficacy of lowering the chemical properties of the first sample (inlet) to the end sample (outlet) is as follows: The phytoremediation concentration stayed neutral for 14 days, lowered BOD by 97.07 percent, COD by 97.69 percent, DO by 98 percent, nitrate by 29.29 percent, ammonia by 66.35 percent, and nitrite by 97.18 percent. For 14 days, the non-phytoremediation concentration remained steady, dropped BOD by 79.24 percent, decreased COD by 76.78 percent, did not decrease DO, decreased nitrate by 14.90 percent, ammonia by 50.80 percent, and nitrite by 89.95 percent.

Table 4. The effectiveness of reducing inlet to outlet chemical parameters

No.	Parameter	Initial Concentration (Inlet)	Phytoremediation concentration 14 days (Outlet)	Non-Phytoremediation Concentration 14 days (Outlet)	% Decrease in Phytoremediation Concentration 14 days (Outlet)	% Decrease in Non-Phytoremediation Concentration 14 days (Outlet)
1	pH	7,56	7,80	7,60	-	-
2	BOD	416,266	121,770	864,342	97,07	79,24
3	COD	1413,98	326,504	328,304	97,69	76,78
4	DO	0,0798	39,914	0,1597	98,00	-
5	Nitrat (NO ₃)	12,924	91,390	109,980	29,29	14,90
6	Ammonia (NH ₃ -N)	0,326	0,1097	0,1604	66,35	50,8
7	Nitrite (NO ₂)	1,065	0,0300	0,1070	97,18	89,95

Table 5. The effectiveness of decreasing the physical parameters of the inlet to the outlet

No.	Parameter	Initial Concentration (Inlet)	Phytoremediation concentration 14 days (Outlet)	Non-Phytoremediation Concentration 14 days (Outlets)	% Decrease in Phytoremediation Concentration 14 days (Outlet)	% Decrease in Non-Phytoremediation Concentration 14 days (Outlet)
1	Temperature	28,7	26,4	28,9	-	-
2	Dissolved Residue (TDS)	885	189	244	78,64	72,43
3	Suspended Solids (TSS)	2170	45	88	97,93	95,94
4	Turbidity	523	8,69	16,20	98,34	96,90

Table 6. The effectiveness of reducing inlet to outlet biological parameters

No.	Parameter	Initial Concentration (Inlet)	Phytoremediation concentration 14 days (Outlet)	Non-Phytoremediation Concentration 14 days (Outlet)	% Decrease in Phytoremediation Concentration 14 days (Outlet)	% Decrease in Non-Phytoremediation Concentration 14 days (Outlet)
1	Fecal Coliform	2	1,8	1,8	10,00	10,00
2	Total Coliform	40	3,5	17	91,25	57,50

The efficiency of reducing the physical characteristics of the starting concentration (inlet) to the final concentration (outlet) is shown in the table as follows: Phytoremediation samples remained stable for 14 days at temperature concentrations, with TDS 76.64 percent lower than the initial concentration, TSS 97.93 percent lower, and turbidity 98.34 percent lower, while non-phytoremediated concentrations remained stable for 14 days at temperature concentrations, with TDS 72.43 percent lower than the initial concentration, TSS 95.94 percent lower, and turbidity 96.90 percent lower.

Based on the table of the efficiency of reducing the initial concentration of biological parameters (inlet) to the end concentration (outlet): The phytoremediation concentration lowered Fecal Coliform by 10% from the starting concentration after 14 days. Total coliform decreased by 91.25 percent from the original concentration in the 14-day phytoremediation sample.

According to the results of wastewater treatment shown in tables 4, 5, and 6, the effectiveness of reducing the concentration of waste has met the water quality standards, though the results obtained have not been maximised where TSS is reduced due to the process of absorption and decomposition of contaminants (waste) in water by microbial activity in the biofilter building and aquatic plant roots.

Microorganisms flourish in neutral pH environments, minimizing waste. Plants may grow successfully with a neutral pH, minimizing waste since the nutrients required are phosphate and nitrogen. The presence of microorganisms that settle in the biofilter and plant roots reduces BOD by allowing the breakdown of organic materials, lowering the concentration of pollutants. COD reduction achieves regenerative efficiency (reduction) by the ability of biofilters and plant roots to break down COD levels, allowing microorganisms to break down COD levels. The reduction in TSS, COD and BOD parameters increases the availability of dissolved oxygen (DO), allowing plants to develop healthily.

References

- [1] R. Tarru and N. A. Prihartini, "Study of Determining the Water Quality Status of the Sadang River for Clean Water Needs", *Hathi-Pusat.Org*, [Online]. Available: <https://Hathi-Pusat.org/Ejournalv2/Index.Php/Pit-36/Article/View/405>
- [2] Y. Adriati, M. S. Pallu, M. Selintung, and B. Bakri, "Raw water treatment model with combined system of downflow - Upflow filter," *International Journal of Engineering Trends and Technology*, vol. 69, no. 8, pp. 237–242, 2021. Crossref, <https://doi.org/10.14445/22315381/IJETT-V69I8P229>

This implies that stem and root plants can adequately photosynthesize, allowing phytoremediation to occur. The capacity of the roots to absorb water increases, resulting in a reduction in turbidity.

Ammonia levels dropped owing to the capacity of the biofilter and water bamboo roots to penetrate deeply, increasing the contact area with the waste and so providing more possibilities to absorb nitrogen. Smaller amounts of effluent were found with residency lengths of 7 and 14 days, resulting in a decrease in waste levels.

5. Conclusion

According to the study's findings, the spatial distribution of livestock waste in the Saddang watershed experienced waste distribution that did not meet water quality standards, with the level of pollution in ST01, ST.04, ST.05, and ST0 (outlet) being so high that it was treated with a biofilter and phytoremediation system. The results of the effectiveness of waste reduction for physical parameters are Dissolved Residue (TDS) of 78.64 percent, Suspended Solids (TSS) of 97.93 percent, Turbidity of 96.90 percent, COD of 97.69 percent, DO of 98 percent, Nitrate of 29.29 percent, Ammonia 66.35 percent, Nitrite 97.18 percent, and for biological parameters, Fecal Coliform by 10%, Total This leads to the conclusion that treatment using a combination system of biofilter and phytoremediation may eliminate pollutants in livestock effluent, hence reducing the deterioration of river water quality.

Funding Statement

The funding of this research comes from the personal fund

Acknowledgments

The authors would like to deliver the greatest appreciation to all colleagues for supporting the technical aspects of the investigation.

- [23] P. Luo, A. Meimei Zhou, J. Lyu, S. Aisyah, M. Binaya, R. Krishna Regmi and D. Nover, "Water Quality Trend Assessment in Jakarta: A Rapidly Growing Asian Megacity," *PLoS One*, vol. 14, no. 7, 2019, Crossref, <https://doi.org/10.1371/journal.pone.0219009>
- [24] M. F. Purnama, S. F. Sari, A. K. Admaja, Salwiyah, Abdullah, and Haslianti, "Spatial Distribution of Invasive Alien Species *Tarebia Granifera* In Southeast Sulawesi, Indonesia," *AAEL Bioflux*, vol. 13, no. 3, pp. 1355–1365, 2020, Accessed: Aug. 13, 2022. Crossref, <https://www.cabdirect.org/cabdirect/abstract/20203342193>
- [25] D. Adyasari, T. Oehler, N. Afati, and N. Moosdorf, "Groundwater Nutrient Inputs Into an Urbanized Tropical Estuary System in Indonesia," *Science of the Total Environment*, vol. 627, pp. 1066–1079, 2018, Crossref, <https://doi.org/10.1016/j.scitotenv.2018.01.281>
- [26] A. Kustanto, "Water quality in Indonesia: the Role of Socioeconomic Indicators," *Jurnal Ekonomi Pembangunan*, vol. 18, no. 1, pp. 47–62, 2020, Crossref, <http://dx.doi.org/10.29259/jep.v18i1.11509>
- [27] A. Jamshidi, M. Morovati, M. M. Golbini Mofrad, M. Panahandeh, H. Soleimani, and H. Abdolhpour Alamdari, "Water Quality Evaluation and Non-Carcinogenic Risk Assessment of Exposure to Nitrate in Groundwater Resources of Kamyaran, Iran: Spatial Distribution, Monte-Carlo Simulation, and Sensitivity Analysis," *Journal of Environmental Health Science & Engineering*, vol. 19, no. 1, pp. 1117–1131, 2021, Crossref, <https://doi.org/10.1007/s40201-021-00678-x>
- [28] N. R. Buwono, Y. Risjani, and A. Soegianto, "Distribution of Microplastic in Relation to Water Quality Parameters in the Brantas River, East Java, Indonesia," *Environmental Technology & Innovation*, vol. 24, 2021, Crossref, <https://doi.org/10.1016/j.eti.2021.101915>

ORIGINALITY REPORT

12%

SIMILARITY INDEX

%

INTERNET SOURCES

11%

PUBLICATIONS

6%

STUDENT PAPERS

PRIMARY SOURCES

- 1** Mingxing Nie, Yulian Li, Lianxiang Li, Junyong He, Peidong Hong, Kaisheng Zhang, Xinli Cai, Lingtao Kong, Jinhuai Liu. "Ultrathin iron-cobalt oxide nanosheets with enhanced H₂O₂ activation performance for efficient degradation of tetracycline", Applied Surface Science, 2020
Publication 1%
- 2** Restu Juniah, Hisni Rahmi. "The influence of sand mining towards the sustainability of power support and capacity of Lambidaro River", AIP Publishing, 2017
Publication 1%
- 3** Sri Wahyuningsih. "Assessment of Water Quality Status in Bondet Estuary, Cirebon", Tomini Journal of Aquatic Science, 2022
Publication 1%
- 4** M J Wibowo, W Winarno, B Hariono, R Wijaya. "Evaluation of Kalibomo watershed water quality using the storet method", IOP 1%

Conference Series: Earth and Environmental Science, 2021

Publication

5	Submitted to Cranfield University Student Paper	1 %
6	Joana P. Fernandes, Patrícia Duarte, C. Marisa R. Almeida, Maria F. Carvalho, Ana P. Mucha. "Potential of bacterial consortia obtained from different environments for bioremediation of paroxetine and bezafibrate", Journal of Environmental Chemical Engineering, 2020 Publication	1 %
7	Nur Firmahaya, Agatha Piranti. "Determination of Water Quality Status of Telaga Menjer Wonosobo, Indonesia: An Official Tool for Evaluating the Best Function of Water", Journal of Ecological Engineering, 2022 Publication	<1 %
8	Submitted to Colorado School of Mines Student Paper	<1 %
9	Submitted to Monash University Student Paper	<1 %
10	Submitted to Universitas Muhammadiyah Surakarta Student Paper	<1 %

11 R M D Ujianti, S Anggoro, A N Bambang, F Purwanti. "Water quality of the Garang River, Semarang, Central Java, Indonesia based on the government regulation standard", Journal of Physics: Conference Series, 2018
Publication

12 Submitted to The University of the South Pacific
Student Paper

13 Somali Chaterji, Nathan Delay, John Evans, Nathan Mosier, Bernie Engel, Dennis Buckmaster, Michael Ladisch, Ranveer Chandra. "LATTICE: A Vision for Machine Learning, Data Engineering, and Policy Considerations for Digital Agriculture at Scale", IEEE Open Journal of the Computer Society, 2021
Publication

14 H S D Kospa, Rahmadi. "Influence of Community Behaviour on Water Quality in Sekanak River, Palembang", IOP Conference Series: Earth and Environmental Science, 2019
Publication

15 Submitted to National University of Singapore
Student Paper

16 Yizhen Li, Long Ma, Yaoming Li, Salamat Abdyzhapar uulu, Jilili Abuduwaili. "Exploration

of the driving factors and distribution of fecal coliform in rivers under a traditional agro-pastoral economy in Kyrgyzstan, Central Asia", *Chemosphere*, 2021

Publication

17

"Community Opinion on Environmental Information System for Urban Rivers", *International Journal of Engineering and Advanced Technology*, 2019

Publication

18

E. Buscaroli, I. Braschi, C. Cirillo, A. Fargue-Lelièvre, G.C. Modarelli, G. Pennisi, I. Righini, K. Specht, F. Orsini. "Reviewing chemical and biological risks in urban agriculture: a comprehensive framework for a food safety assessment of city region food systems", *Food Control*, 2021

Publication

19

V. Santhana Kumar, Soma Das Sarkar, Basanta Kumar Das, Dhruba Jyoti Sarkar et al. "Sustainable biodiesel production from microalgae *Graesiella emersonii* through valorization of garden wastes-based vermicompost", *Science of The Total Environment*, 2021

Publication

20

Submitted to UC, Boulder

Student Paper

<1 %

<1 %

<1 %

<1 %

21

Prihatiningsih Bekti, Zaenal Kusuma, Agus Suharyanto, Amin Setyoleksono. "Analysis of the distribution of domestic wastewater in the Brantas river area of Malang city", MATEC Web of Conferences, 2018

Publication

<1 %

22

Abraham Suriadikusumah, Oviyanti Mulyani, Rija Sudirja, Emma Trinurani Sofyan, Muhammad Hilda Rizki Maulana, Asep Mulyono. "Analysis of the water quality at Cipeusing river, Indonesia using the pollution index method", Acta Ecologica Sinica, 2020

Publication

<1 %

23

Francesco Mauro, Luca Braidotti, Giorgio Trincas. "A Model for Intact and Damage Stability Evaluation of CNG Ships during the Concept Design Stage", Journal of Marine Science and Engineering, 2019

Publication

<1 %

24

J. V. Morin, B. Mansoben, M. Infaindan, F.L. Ayer et al. "THE INFLUENCE OF SOIL CHEMICAL CONTENT FACTOR ON RUSWERI RIVER WATER QUALITY IN SUPIORI REGENCY, PROVINCE OF PAPUA, INDONESIA", Rasayan Journal of Chemistry, 2021

Publication

<1 %

25

Marzieh Mokarram, Hamid Reza Pourghasemi, Kuan Huang, Huichun Zhang.

<1 %

"Investigation of water quality and its spatial distribution in the Kor River basin, Fars province, Iran", Environmental Research, 2021

Publication

26

Wiwik Widyaningrum, Margaretha Widyastuti. "Effects of Liquid Wastes from Tofu Industries on Water Quality in Parangan River, Magelang District, Central Java-Indonesia", E3S Web of Conferences, 2021

Publication

27

Astrini Widiyanti, Hadi Susilo Arifin, Nana Mulyana Arifjaya. "The Use of Greywater for Hydroponics Plant in Griya Katulampa Bogor City", IOP Conference Series: Earth and Environmental Science, 2020

Publication

28

M.S Arya, A. Biju, Dani Benchamin. "Assessment of spatial and temporal variations in water quality using multivariate statistical analysis in the Munroe Island, Kerala, India", Acta Ecologica Sinica, 2022

Publication

29

N Lusiana, B Rahadi, Y Anggita. "Determination pollution load capacity of Ngrowo River as wastewater receiver from hospital activities", IOP Conference Series: Earth and Environmental Science, 2020

Publication

<1 %

<1 %

<1 %

<1 %

30 Umara Qayoom, Sheikh Tajamul Islam, Inam Sabha, Sami Ullah Bhat, Shahid Ahmad Dar. "Coliform pollution mapping in major watersheds along Jhelum River Basin of Kashmir Himalaya", Environmental Science and Pollution Research, 2022
Publication <1 %

31 Submitted to Universiti Tunku Abdul Rahman
Student Paper <1 %

32 Hao Hu, Xiang Li, Shaohua Wu, Wei Lou, Chunping Yang. "Effects of long-term exposure to oxytetracycline on phytoremediation of swine wastewater via duckweed systems", Journal of Hazardous Materials, 2021
Publication <1 %

33 Submitted to University of Rwanda
Student Paper <1 %

34 La Sarido. "Study of Water Quality in Bengalon River on Oil Palm Estate", E3S Web of Conferences, 2018
Publication <1 %

35 M Saad, R M Milad, Y A A Faiz, N L Hikmah. "Fisheries community behaviour towards water quality of the Deket river, Lamongan district", IOP Conference Series: Earth and Environmental Science, 2021
Publication <1 %

36

Widyarani, Diana Rahayuning Wulan, Umi Hamidah, Ahmad Komarulzaman, Raden Tina Rosmalina, Neni Sintawardani. "Domestic wastewater in Indonesia: generation, characteristics and treatment", Environmental Science and Pollution Research, 2022

Publication

<1 %

37

Yuping Zhang, Daniel D. Snow, David Parker, Zhi Zhou, Xu Li. "Intracellular and Extracellular Antimicrobial Resistance Genes in the Sludge of Livestock Waste Management Structures", Environmental Science & Technology, 2013

Publication

<1 %

Exclude quotes On

Exclude matches < 9 words

Exclude bibliography On