

ammad_2021_IOP_Conf._Ser._
Mater._Sci._Eng._1052_012036.
pdf
by

Submission date: 08-Mar-2021 03:27AM (UTC-0800)

Submission ID: 1527324076

File name: ammad_2021_IOP_Conf._Ser._Mater._Sci._Eng._1052_012036.pdf (1.2M)

Word count: 3351

Character count: 15620

PAPER • OPEN ACCESS

19

Characteristics of Turning Circle and Zig-Zag Manoeuvres of An Indonesian Ferry Ship In Shallow Water

20

To cite this article: A H Muhammad *et al* 2021 *IOP Conf. Ser.: Mater. Sci. Eng.* **1052** 012036

3

View the [article online](#) for updates and enhancements.

The 17th International Symposium on Solid Oxide Fuel Cells (SOFC-XVII)

DIGITAL MEETING • July 18-23, 2021

EXTENDED Abstract Submission Deadline: February 19, 2021



SUBMIT NOW →

19

Characteristics of Turning Circle and Zig-Zag Manoeuvres of An Indonesian Ferry Ship In Shallow Water

A H Muhammad¹, D Paroka², S Rahman², M R Firmansyah³ and T P Putra⁴

17

¹ Department of Marine Engineering, Faculty of Engineering, Hasanuddin University, Gowa, 50275 Indonesia

² Department of Ocean Engineering, Faculty of Engineering, Hasanuddin University, Gowa, 50275 Indonesia

³ Department of Naval Architecture, Faculty of Engineering, Hasanuddin University, Gowa, 50275 Indonesia

⁴ Research and Development Center for Sea, River, Lake and Ferry Transportation, Ministry of Transportation, Jakarta Pusat, 10110 Indonesia

Abstract. Ship manoeuvring performance is very important in navigation safety, especially when ships operate in shallow water. This paper describes the characteristics of turning circle and zig-zag manoeuvres of Indonesian ferry ships in shallow water. A time-domain simulation program was developed for this purpose. Several parameters such as ship speed and water depth levels have been considered in the simulation. The results show a significant difference in the ship's trajectory and speed when the ship manoeuvres in different water depths. The ship manoeuvre trajectory diameter for shallow water ($h/T=1.3$) is greater than in deep water ($h/T=4.0$). Meanwhile, the speed of the ship during turns increases with the decreasing depth of the water (h). Likewise, the 20/20° zig-zag manoeuvre of the ship shows that the heading angle in shallow waters has a smaller overshoot angle when compared to the ship manoeuvres in the deep waters.

1. Introduction

Ship Behaviour and performance in shallow water are strongly influenced by hydrodynamic interactions between the hull and the bottom channel. That is, the velocity of flow between the hull and the bottom increases, as the flow pressure decreases. A number of changes experienced by the ship when entering shallow water are expressed by changes in resistance, trim, steering, manoeuvring and stopping [1]. Many researchers mention that the change in performance is not only influenced by the hydrodynamic interaction between the hull and the bottom channel, but the decrease in water depth also has an impact on the less efficient and not effective of the propeller and rudder action [2] and [3].

Many investigations have been carried out to show the manoeuvring performance of ships in shallow water through changes in flow velocity or ship speed. Du, et al. [4] has examined ship's speed effect on shallow waters through a system-based method, where a nonlinear transient hydrodynamic and confinement model is implemented to account for the channel bottom effect. The turning manoeuvring model and the confinement model was validated using the experimental data. They concluded that with increasing speed it had increased the hydrodynamic interaction between the hull and the channel bottom. Similar results are also present by Skejic, et al. [5] in his research on water depth's effect on ship manoeuvring through numerical simulations and sea trials. They stated a significant difference in the ship's trajectory and manoeuvring speed when the ship was manoeuvring at different water depths. These were indicated by the increase in tactical diameter and speed of ship manoeuvring along with the decreasing water depth. According to the World Association for Water Transport Infrastructure [6] water depth level is defined as the ratio of water depth including $h/T > 3$ (deep water), $1.5 < h/T < 3$ (medium water), $1.2 < h/T < 1.5$ (shallow water); and $h/T < 1.2$ (very shallow water).

Indonesian ferries ship is a type of ship crossing between islands (passengers and vehicles). This ship has unique characteristics compared to commercial ships in general. Some features of Indonesian ferries ship that can affect the manoeuvrability: i) The ship has a low draft (T); ii) The ship operates in confined



Content from this work may be used under the terms of the Creative Commons Attribution 3.0 licence. Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

water (deep and shallow water); iii) The ship has a superstructure with a relatively large wind catch area and; iv) The ship is equipped with a twin propulsion and rudder system (TRTP) with a relatively large ratio of distances between systems. Based on those characteristics, it is crucial view the Indonesian ferries manoeuvre efficiency and navigation safety.

The limitation of the speed manoeuvring to the water's depth is an essential consideration in operating ships in confined waters. This paper aims to predict the manoeuvring capabilities (turning circle and zig-zag manoeuvre) of Indonesian ferries in deep ($h/T=4.0$) and shallow water ($h/T=1.3$) from the point of view of manoeuvre efficiency and navigation safety.

2. Mathematical Model

In the prediction of ship manoeuvring in shallow water conditions through numerical simulations based on the mathematical model, it is important to use hydrodynamic coefficients on which shallow water effects. The models were based on the 3-DOF equations of manoeuvring motion (surge, sway and yaw) in Equation 1, using the coordinate system in Figure 1.

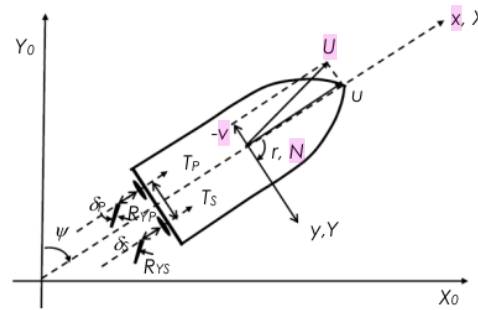


Figure 1. Coordinate system of ship.

$$\begin{aligned}
 (m + m_x)\dot{u} - (m + m_y)rv &= X_H + X_P\{s\} + X_R\{s\} \\
 (m + m_y)\dot{v} + (m + m_x)ru &= Y_H + Y_P\{s\} + Y_R\{s\} \\
 (I_{zz} + J_{zz})\dot{r} &= N_H + N_P\{s\} + N_R\{s\}
 \end{aligned}
 \tag{1}$$

The notations of m , m_x , and m_y are the mass of ship, and added mass inertia in x - y direction respectively; I_{zz} and J_{zz} are moments of inertia and added around z -axis respectively; u , v and r are velocity components at ship's centre of gravity (G). X , Y , and N represent the hydrodynamic forces and moment. The subscript H , P , and R refer to hull, propeller and rudder respectively according to the concept of MMG expression.

Force and moment acting on hull (X_H , Y_H , and N_H) are approximated by the polynomial function of β and r' . The equations are expressed by Kijima, et al. [7] in Equation 2.

$$\begin{aligned}
 X_H &= \frac{1}{2} \rho L d U^2 (X'_{\beta r} r' \sin \beta + X'_{uu} \cos^2 \beta) \\
 Y_H &= \frac{1}{2} \rho L d U^2 (Y'_{\beta} \beta + Y'_r r' + Y'_{\beta\beta} \beta |\beta| + Y'_{rr} r' |r'| + (Y'_{\beta\beta r} \beta + Y'_{\beta r r} r') \beta r') \\
 N_H &= \frac{1}{2} \rho L d U^2 (N'_{\beta} \beta + N'_r r' + N'_{\beta\beta} \beta |\beta| + N'_{rr} r' |r'| + (N'_{\beta\beta r} \beta + N'_{\beta r r} r') \beta r')
 \end{aligned}
 \tag{2}$$

where: β is the drift angle at midship position by $\tan^{-1}(v/u)$ and r' non-dimensionalized yaw rate by rL/U . $X'_{uu}, X'_{br}, Y'_{\beta}, Y'_{r}, Y'_{\beta\beta}, Y'_{rr}, Y'_{\beta\beta r}, Y'_{\beta rr}, N'_{\beta}, N'_{r}, N'_{\beta\beta}, N'_{rr}, N'_{\beta\beta r},$ and $N'_{\beta rr}$ are called the hydrodynamic derivatives.

The mathematical model of forces and moment induced by propeller and rudder (X_P, Y_P, N_P and X_R, Y_R, N_R) can be referred in Khanfir, et al. [8] and Dash, et al, [9].

3. Empirical Equation

3.1. Added Mass and Moment of Inertia

Added masses (m'_x and m'_y) and added moment of inertia (J'_{zz}) are predicted based on the equation developed Sandakane, et al. [10]. The equation is obtained empirically from the simplified equation of ratio of the added mass and the moment of inertia in shallow water. The equation is represented as Equation 3.

$$\frac{m'_x}{m'_{x0}}, \frac{m'_y}{m'_{y0}}, \frac{J'_{zz}}{J'_{zz0}} = 1 + \alpha \left\{ \exp^{(\beta)^{d/H}} - 1 \right\} \quad (3)$$

Where α and β are coefficient changes according to the ship motion mode and ship form coefficients such as draft-breadth ratio and the block coefficient.

3.2. Hydrodynamic Coefficient

The set of hydrodynamic coefficients is determined based on the equations developed by Kijima, et al. [7]. The equation is obtained semi empirically from a numerical calculation based on lifting surface theory and model tests in full load condition. In shallow water conditions, the coefficient can be obtained by multiplying a correction factor with a coefficient in deep water conditions. The equation is represented as Equation 4.

$$D_{shw} = f(h)D_{dep} \quad (4)$$

Where, D_{shw} is the derivatives in shallow water, D_{dep} is the derivatives in deep water, and $f(h)$ is the correcting factor, $h=d/H$ (d is draught, H is water deep). The correcting factor, $f(h)$ for hydrodynamic coefficient can be predicted by Equation 5 (for $Y'_{\beta}, Y'_{\beta\beta}, Y'_{\beta rr}, N'_{\beta},$ and N'_{r}) and Equation 6 (for $Y'_{r-r}, (m' + m'_{x}), Y'_{rr}, Y'_{\beta\beta r}, N'_{\beta\beta}, N'_{rr}, N'_{\beta\beta r},$ and $N'_{\beta rr}$).

$$f(h) = \left[\frac{1}{1-h^n} \right] - h \quad (5)$$

$$f(h) = 1 + a_1 h + a_2 h^2 + a_3 h^3 \quad (6)$$

Where, $n, a_1, a_2,$ and a_3 are the coefficient of the correcting factor. The resistance and propulsion parameters for simulation are predicted by Holtrop Method [11] and [12]. In shallow water conditions, the resistance coefficient of shallow water (R'_0)_{shallow} is predicted by Equation 7 [13].

$$\frac{(R'_0)_{shw}}{(R'_0)_{dep}} = 0.388(T/H)^2 + 1 \quad (7)$$

Where, $(R'_0)_{dep}$ is the resistance coefficients in deep water, T is draught and H is water deep.

4. Simulation Program

4.1. Time Domain Simulation

The prediction of ship manoeuvrability can be analysed through the swept paths [14]. The analysis has been carried out using the time domain simulation program of MATLAB-Simulink [15] and [16]. The swept paths of the ship can be obtained by double integrating the acceleration of manoeuvring ship motion mathematical models including hydrodynamic derivatives as the integration process of the 3-DOF equation of motion (surge sway and yaw) in Equation 8, 9 and 10.

$$(m + m_x)\dot{u} - (m + m_y)rv = X_H + X_P\{s\} + X_R\{s\}$$

$$\dot{u} = X_H + X_P\{s\} + X_R\{s\} + (m + m_y)rv / (m + m_x) \quad (8)$$

$$u = \int \dot{u} dt; x = \int u dt$$

$$(m + m_y)\dot{v} + (m + m_x)ru = X_H + X_P\{s\} + X_R\{s\}$$

$$\dot{v} = X_H + X_P\{s\} + X_R\{s\} + (m + m_x)ru / (m + m_y) \quad (9)$$

$$v = \int \dot{v} dt; y = \int v dt$$

$$(I_{zz} + J_{zz})\dot{r} = X_H + X_P\{s\} + X_R\{s\}$$

$$\dot{r} = (X_H + X_P\{s\} + X_R\{s\}) / (I_{zz} + J_{zz}) \quad (10)$$

$$r = \int \dot{r} dt; \psi = \int r dt$$

4.2. Simulation Data

The object of the study is the ferry ship of KMP Bontoharu, owned by PT. (Persero) ASDP Indonesia Ferry. Ship with a capacity of 1050 G with a length of 54.00 m (LOA) is operated at the Bira-Pamatata crossing in South Sulawesi Province. The ship particulars are presented in Table 1.

Table 1. Ship particulars.

Parameter	Value
Length over all (LOA), m	54.00
Length between perpendiculars (Lbp), m	47.45
Breadth (B), m	14
Depth (D), m	3.4
Draft (T), m	2.45
Ship speed (V), m/s ²	6.618
Displacement (Δ), Ton	1148
Propeller blade number (Z)	2 x 4
Propeller diameter (D _p), m	1.422
Pitch-diameter ratio (P/D), m	1.066
Propeller number of revolutions per second (n), rps	8.784
Span of rudder, m	1.550
Chord of rudder, m	0.900
Blade area of rudder (A _R), m ²	2 x 1.395
Power of main engine (BHP), HP	2 x 1000
Main Engine number of revolutions per minute (RPM)	1850

5. Results and Discussion

This study focuses on the manoeuvring prediction of a ferry ship in deep and shallow water conditions. A time domain simulation program by MATLAB Simulink was developed for this purpose. Several parameters such as the initial speed of the ship and water depth level have been considered in the simulation. The information is critical in ship navigation safety, particularly when ship operating in shallow water. Figure 2 shows the simulation results for the 35° starboard turn manoeuvring of a KMP Bontoharu in shallow water (h/T=1.3), medium shallow water (h/T=2.0) and deep water (h/T=4.0) at the initial speed of the ship (U) 6.618 m/s. It was found that the tactical diameter (D_T) of the ferry ship for

shallow water was 10.9 % and 53.1 % larger than that for medium shallow water and deep water respectively. Figure 2 also shows the effect of depths water conditions ($h/T=1.3$) on the increase in the forward speed of the ship (u) and the turning speed (deg/s) during the ship turning manoeuvring. This trend is similar to the findings of Skejic, et al. [5] Which confirming the characteristics of ship manoeuvring in shallow and deep water.

Figure 3 shows the simulation results of the $20^{\circ}/20^{\circ}$ zig-zag manoeuvring of a KMP Bontoharu at three different water depth conditions (shallow, medium shallow and deep waters). The horizontal and vertical axes express time and heading angle (ψ) respectively. It shows that the ship manoeuvres' heading angle in shallow water has a smaller overshoot angle compared to the ship manoeuvres in medium shallow and deep water. A ship zigzag manoeuvres in shallow water ($h/T=1.3$), took 65.7 seconds for the 1st overshoot with the heading angles of 3.35° . These result were faster in 4.0 and 7.9 seconds and heading angles of 6.84° and 8.24° than in medium shallow and deep water respectively. This result is similar to the findings of Maimun et al. [15], which confirms the characteristics of her barge manoeuvring in shallow and deep water. Table 2 and 3 indicates the summary of simulation results of ship turning circle and zigzag manoeuvres in two different water depths.

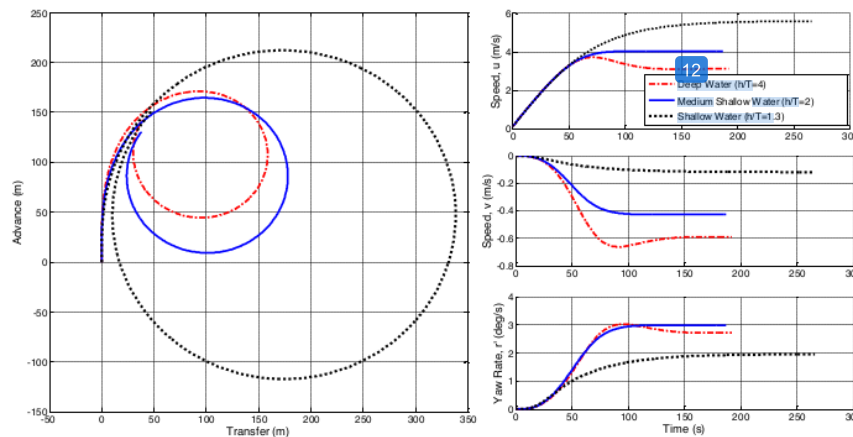


Figure 2. Turning circles in shallow and deep water at initial speed (U) 6.618 m/s.

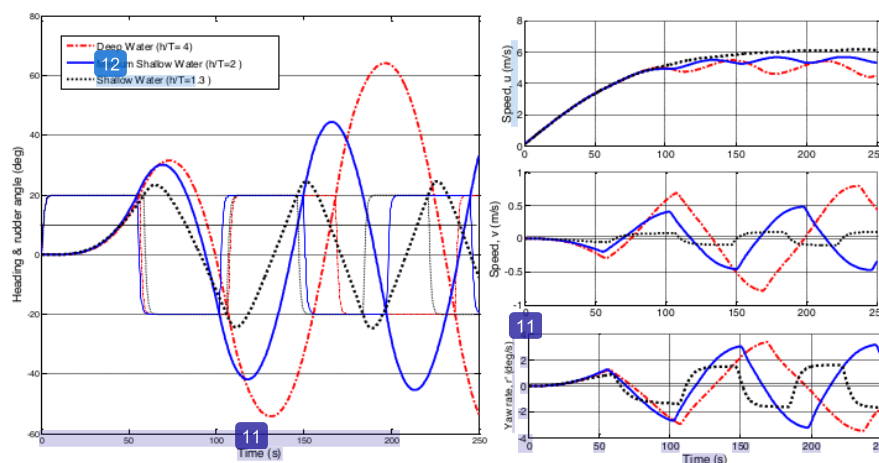


Figure 3. Zig-zag $20^{\circ}/20^{\circ}$ manoeuvres in shallow and deep water at initial speed (U) 6.618 m/s.

Table 2. Turning circle characteristics in shallow and deep water.

No.	Simulation type	δ (deg.)	V_s (m/s)	D_T (m)	A_D (m)	u (m/s)	v (m/s)	r (deg./s)
1	Turning circle ($h/T = 4.0$)	35	6.618	158.4	171.2	3.10	-0.59	2.72
2	Turning circle ($h/T = 2.0$)	35	6.618	177.8	164.6	4.00	-0.43	2.98
3	Turning circle ($h/T = 1.3$)	35	6.618	338.3	212.3	5.88	-0.12	1.95

Table 3. Zig-zag manoeuvres characteristics in shallow and deep water.

No.	Simulation type	δ (deg.)	V_s (m/s)	I^{st} (deg.)	Time (s)	2^{nd} (deg.)	Time (s)	u (m/s)
1	Zig-zag manoeuvre ($h/T = 4.0$)	20/20	6.618	11.59	73.6	-34.2	131.5	5.41
2	Zig-zag manoeuvre ($h/T = 2.0$)	20/20	6.618	10.19	69.7	-21.8	118.3	5.68
3	Zig-zag manoeuvre ($h/T = 1.3$)	20/20	6.618	3.35	65.7	-4.34	111.6	6.13

6. Conclusions

Prediction of ferry ship Indonesia manoeuvring in shallow water through a time domain simulation program has been analyzed. The numerical simulation results show that the tactical diameter (D_T) of the ferry in shallow waters was 53.1% greater than the tactical diameter in deep water, while the forward speed (U) and turning rate (deg./s) of the ship have increased when the ship is manoeuvring in shallow water. On the other hand, in a zigzag maneuver of 20/20 degrees, the ship heading angle in shallow water has a smaller overshoot angle than ship maneuvering in deep water. So that through reducing the initial speed of the ship when entering shallow water it can improve ship safety,

Acknowledgments

The authors wish to thank Hasanuddin University for funding to this research. This research was funded by Basic Research of UNHAS under grand No. 2649/UN4.1/KEP/2020. The authors would also like to thanks PT. ASDP Indonesia Ferry Branch of Selayar for the sea trial and ship data collection.

References

- [1] Duarte H O, Droguett E P, Martins M R, Lutzhoft M, Pereira P S and Lloyd J 2016 *Intl J Maritime Eng*, **158** 177-186.
- [2] Varyani K S, Hamoudi B, Hannah S and McGregor R C 1997 *Proc. IFAC Conf. on Manoeuvring and Control of Marine Craft (Croatia)* vol 30 (22) pp 145-150.
- [3] Delefortrie G and Vantorre M 2007 *J. Ship Res.* **51(4)** pp287-296.
- [4] Du P, Ouahsine A and Sergent P 2018 *J. Comptes Rendus Mécanique* **346(5)** pp390-401.
- [5] Skejic R, Kirimoto K, Berg T E and Pedersen E 2012 *Proc. Int. Conf. on Marine Simulation and Ship Manoeuvrability (Croatia)* pp 542 - 550.
- [6] PIANC 1992 Capability of Ship Manoeuvring Simulation Models for Approach Channels and Fairways in harbours, Brussels (Belgium), Report of Working Group no. 20 of Permanent Technical Committee II, Supplement to PIANC *Bulletin no. 77*. 1992
- [7] Kijima K, Nakiri Y, Tsusui Y and Matsunaga M 1990 *Proc. MARSIM & ICSM 90 (Japan)* p
- [8] Khanfir S, Hasegawa K, Nagarajan V, Shouji K and Lee S K 2011 *J. Mar Sci Technol* **16** pp 472-490. 1982
- [9] Dash AK, Nagarajan V and Sha O P 2015 *J. International Shipbuilding Progress* **62** pp 57-111.
- [10] Sadakane H, Toda Y and Lee Y S 2001 *J. Japan Institute of Navigation* **105** 11-20.
- [11] Holtrop J and Mennen G G J 1982 *J. International Shipbuilding Progress* **29** pp166-170
- [12] Holtrop J 1984 *J. International Shipbuilding Progress* **31** pp272-276.
- [13] Furukawa Y, Ibaragi H, Nakiri Y and Kijima K 2016 *Proc. 4th MASHCON (Germany)* pp 295-303.

- [14] IMO 2002 Standards for Ship Maneuverability *Report of the Maritime Safety Committee on its Seventy-Sixth Session-Annex 6 (Resolution MSC. 137(76))* (London)
- [15] Maimun A, Priyanto A, Muhammad A H, Scully C C and Awal Z I 2011 *J. Ocean Engineering* **38(11–12)** pp1277–1356.
- [16] Muhammad A H, Hasbullah M, Djabbar M A and Handayani 2015. *International Journal of Technology* **6(3)** pp 452-461.

ORIGINALITY REPORT

24%

SIMILARITY INDEX

%

INTERNET SOURCES

24%

PUBLICATIONS

%

STUDENT PAPERS

PRIMARY SOURCES

1

A. Maimun, A. Priyanto, A.H. Muhammad, C.C. Scully, Z.I. Awal. "Manoeuvring prediction of pusher barge in deep and shallow water", Ocean Engineering, 2011

Publication

2%

2

Muhammad, Andi Haris, Adi Maimun, Omar Yaakob, and Agoes Priyanto. "Effect of Spray-Strake on Patrol Vessel Manoeuvrability", Volume 4 Ocean Engineering Offshore Renewable Energy, 2008.

Publication

2%

3

Y Adriati, M S Pallu, M Selintung, B Bakri. "Relevance between filtration rate and filter media thickness in downflow filter systems", IOP Conference Series: Earth and Environmental Science, 2020

Publication

2%

4

"Proceedings of the Fourth International Conference in Ocean Engineering (ICOE2018)", Springer Science and Business Media LLC, 2019

2%

5 Zhang Qiang, Zhu Guibing, Hu Xin, Yang Renming. "Adaptive neural network auto-berthing control of marine ships", Ocean Engineering, 2019

Publication

6 Sangmin Lee, Chunbeom Hong. "Study on the course stability of very large vessels in shallow water using CFD", Ocean Engineering, 2017

Publication

7 Sheeja Janardhanan, P. Krishnankutty. "Estimation of Sway Velocity-Dependent Hydrodynamic Derivatives in Surface Ship Manoeuvring Using Ransc Based CFD", The International Journal of Ocean and Climate Systems, 2010

Publication

8 Yoshimura, Y, and H Yabuki. "On the control of CPP ships by steering during in-harbour ship-handling", Marine Navigation and Safety of Sea Transportation, 2009.

Publication

9 K.S. Varyani, B. Hamoudi, S. Hannah, R.C. McGregor. "Effect of propeller and Rudder Parameters on Shallow Water Manoeuvring Simulation of Full Form Ships", IFAC Proceedings Volumes, 1997

10

Omer Faruk Sukas, Omer Kemal Kinaci, Sakir Bal. "Theoretical background and application of MANSIM for ship maneuvering simulations", Ocean Engineering, 2019

Publication

1%

11

Lecture Notes in Control and Information Sciences, 2010.

Publication

1%

12

Intissar Razgallah, Sami Kaidi, Hassan Smaoui, Philippe Sergent. "The impact of free surface modelling on hydrodynamic forces for ship navigating in inland waterways: water depth, drift angle, and ship speed effect", Journal of Marine Science and Technology, 2018

Publication

1%

13

Ryosuke Suzuki, Yoshiaki Tsukada, Michio Ueno. "Estimation of full-scale ship manoeuvring motions from free-running model test with consideration of the operational limit of an engine", Ocean Engineering, 2019

Publication

1%

14

Maimun, A.. "Manoeuvring prediction of pusher barge in deep and shallow water", Ocean Engineering, 201108

Publication

1%

Xiaoya Tang, Sichen Tong, Guoxian Huang,

15

Guangxiang Xu. "Numerical investigation of the maneuverability of ships advancing in the non-uniform flow and shallow water areas", Ocean Engineering, 2020

Publication

1%

16

Hironori Yasukawa. "Steady sailing performance of a ship in the proximity to the bank under windy conditions", Journal of Marine Science and Technology, 2020

Publication

1%

17

Ardy Arsyad, Yasuhiro Mitani, Hiro Ikemi. "Measurement of specific storage of rock for supercritical carbon dioxide using constant flow pump and constant head permeability techniques", Innovative Infrastructure Solutions, 2016

Publication

<1%

18

J.E. Carreño, J.D. Mora, F.L. Pérez. "Mathematical model for maneuverability of a riverine support patrol vessel with a pump-jet propulsion system", Ocean Engineering, 2013

Publication

<1%

19

Lucas J. Yiew, Yuting Jin, Allan R. Magee. "On estimating the hydrodynamic coefficients and environmental loads for a free-running vessel in waves", Journal of Physics: Conference Series, 2019

Publication

<1%

20

A M Syamsuri, D Suriamihardja, M A Thaha, T Rachman. "Wave reflection and transmission test with pipe wall roughness and without roughness on the perforated breakwater", IOP Conference Series: Earth and Environmental Science, 2020

Publication

<1%

21

Qingsong Zeng, Robert Hekkenberg, Cornel Thill, Hans Hopman. "Scale effects on the wave-making resistance of ships sailing in shallow water", Ocean Engineering, 2020

Publication

<1%

22

Yi Liu, Zaojian Zou, Lu Zou, Sheming Fan. "CFD-based numerical simulation of pure sway tests in shallow water towing tank", Ocean Engineering, 2019

Publication

<1%

23

Sahbi Khanfir, Kazuhiko Hasegawa, Vishwanath Nagarajan, Kouichi Shouji, Seung Keon Lee. "Manoeuvring characteristics of twin-rudder systems: rudder-hull interaction effect on the manoeuvrability of twin-rudder ships", Journal of Marine Science and Technology, 2011

Publication

<1%

24

Celik, F.. "A numerical study for effectiveness of a wake equalizing duct", Ocean Engineering, 200711

<1%

25

Ma, Ning and Yoshimura, Yasuo. "Manoeuvring Prediction of Fishing Vessels", The Society of Naval Architects of Japan, Japan Institute of Navigation and International Marine Simulator Forum, 2014.

Publication

26

Ramli Rahim, Baharuddin, Rosady Mulyadi. "Classification of daylight and radiation data into three sky conditions by cloud ratio and sunshine duration", Energy and Buildings, 2004

Publication

27

S. Kaidi, H. Smaoui, P. Sergent. "CFD Investigation of Mutual Interaction between Hull, Propellers, and Rudders for an Inland Container Ship in Deep, Very Deep, Shallow, and Very Shallow Waters", Journal of Waterway, Port, Coastal, and Ocean Engineering, 2018

Publication

28

Eloot, Katrien, Guillaume Delefortrie, Marc Vantorre, and Frans Quadvlieg. "Validation of Ship Manoeuvring in Shallow Water Through Free-Running Tests", Volume 7 Ocean Engineering, 2015.

Publication

29

G. Dubbioso, M. Viviani. "Aspects of twin screw ships semi-empirical maneuvering models",

<1%

<1%

<1%

<1%

<1%

30

Jie Zhang, Yingjun Zhang. "A Novel Ship-Ship Distance Model in Restricted Channel via Gaussian-TRR Identification", Mathematical Problems in Engineering, 2021

Publication

<1%

31

Kazuhiko Hasegawa, Donghoon Kang, Masaaki Sano, Kenjiro Nabeshima. "Study on the maneuverability of a large vessel installed with a mariner type Super VecTwin rudder", Journal of Marine Science and Technology, 2006

Publication

<1%

32

Vishwanath Nagarajan. "Comparison of the mariner Schilling rudder and the mariner rudder for VLCCs in strong winds", Journal of Marine Science and Technology, 02/2008

Publication

<1%

33

W.C. Chung, H.Y. Kang, M.H. Kim. "Multi-scale approach for chain-mooring OPB-induced failure considering time-varying interlink bending stiffness and fairlead condition", Applied Ocean Research, 2020

Publication

<1%

34

A. Maimun, A. Priyanto, Rahimuddin, A.Y. Sian, Z.I. Awal, C.S. Celement, Nurcholis, M. Waqiyuddin. "A mathematical model on

<1%

manoeuvrability of a LNG tanker in vicinity of bank in restricted water", Safety Science, 2013

Publication

35

Jialun Liu, Robert Hekkenberg, Erik Rotteveel, Hans Hopman. "Literature review on evaluation and prediction methods of inland vessel manoeuvrability", Ocean Engineering, 2015

Publication

<1%

Exclude quotes Off

Exclude matches Off

Exclude bibliography Off