

# 17.FBCE10083.pdf

*by*

---

FILE	17.FBCE10083.PDF (2.91M)	WORD COUNT	5108
TIME SUBMITTED	26-APR-2019 06:12AM (UTC+0700)	CHARACTER COUNT	25754
SUBMISSION ID	1119288055		



# Test of Raw Water Processing Model Using Natural Zeolite from South Sulawesi as Filtration for Heavy Metal Lead (Pb)

Sukmasari Antaria  
Doctoral Student,  
Civil Engineering,  
Hasanuddin University

Mary Selintung  
Professor,  
Civil Engineering,  
Hasanuddin University

Muh. Saleh Pallu  
Professor,  
Civil Engineering,  
Hasanuddin University

Mukhsan Putra Hatta  
Lecturer,  
Civil Engineering  
Hasanuddin University

**Abstract---** This study aims to observe the characteristics of natural zeolite from South Sulawesi which is used as a filter of heavy metals lead (Pb) in the raw water. Zeolites are activated by heated 100 °C, 200 °C, 300 °C and 400 °C. The zeolite is characterized by XRD (X-Ray Diffraction) and SEM (Scanning Electron Microscope). Furthermore, the activated zeolites already crushed or pulverized with a mesh sized 170 or 3 mm, and then weighed with the weight of 20 g, 35 g and 50 g, respectively. Water sample of Jeneberang river, taken from three locations on the river Dam Jeneberang Reservoir is filled with 8 liters of raw water that has been injected with 5 ppm of heavy metals lead (Pb). Then streamed or run on the water treatment models and the contact time is calculated to produce clean water of 1000mL. Similar treatment is performed at each weight variation of zeolite. Result of the water processed is tested by means of AAS (Atomic Absorption Spectrophotometry). Absorbance values obtained are 20 g (0.000), 35 g (0.000) and 50 g (-0.001) respectively. The result of analysis with a model testing is obtained, the Langmuir model (R=99,8 %), and the Freudlich model (R=98,1 %).

**Keywords---** Natural Zeolites of South Sulawesi, Water Treatment Model, Raw Water, Heavy Metal Lead (Pb)

## I. INTRODUCTION

Aspects of the deterioration of the quality of life and its influence, requiring handling in concrete is the aspect of pollution on water. Considering that the human body consists of 70 % water, then in his life human always requires clean water / drinking water (Sumirat, 1994).

Pollution of the marine environment, resulted in the fact that the water consumed for everyday. Mostly, the clean water/drinking water used by urban households does not meet the health requirement and even in some places is no longer suitable for drinking. The water ADW contains hazardous toxic material (heavy metal) (Rahman, 2004).

If heavy metals are accumulated in the human body in large amount can cause a variety of health problems. For example; heavy metals of Lead (Pb), if it accumulates in the human body resulting in disorders of the brain, kidneys, bones and mental retardation in children who are growing. The maximum levels allowed in drinking water is 0.05 mg / Liter (Moc, 1991 in Effendi, 2003).

The binding of toxic substance and heavy metals contained in the raw water requires a means of costly equipment and materials. However, in Kasinggiran Hamlet and Sangkaropi Hamlet in Sangkaropi Village, Toao and Nindilla district of Sa'dang Balusu in North Toraja Regency and Luwu in South Sulawesi, discovered the mineral zeolites by many researchers, used as a versatile mineral that includes: dehydrater, as adsorbent and molecular sieves, as well as the catalyst and ion exchange (ion exchanger).

In this study, natural zeolite South Sulawesi is used to reduce toxic materials contained in the raw water. Adsorption and filtration method is used in this processing. The processed water is expected to meet the quality requirements, in accordance with the Regulation of the Minister of Health of the Republic of Indonesia (492 / Menkes / Per/ IV/ 2010).

According to the description of the background, the aims of the research are:

- What the characteristic of South Sulawesi zeolite nature ?
- What about the ability of natural zeolite South Sulawesi as raw water filtration Jeneberang River ?
- How to determine the relations between actual concentrating and absorbance ?

## II. BIBLIOGRAPHY

### A. Water Quality Issues on River System in Indonesia

According to Sennang (1995), in 2020 Indonesian people was predicted to increase and reached ±262,409,000 people. South Sulawesi would reach ±9,800,000 people. The needs of water will increase whether the quantities, qualities, or types of use. The fulfill of water availability for people will be more depending on quality of Stream River Area at down stream. The result from Water Resource Research Center, about reservoir water quality in Indonesia, that for 1996-2010 period, including Bili-Bili Reservoir in South Sulawesi which has high sedimentation level. The dame having water turbidity from 29,00-152.000 NTU, going across the limit, 6000 NTU (Nhepелometric Turbidity Unit) (SEPLH Journal In Hamzah, 2010).

### B. Drinking Water Supplying Requirement

- Based on Nusa & Satmoko (2008), the main problem which still been facing in drinking water supply in Indonesia are:
- The level of service is low.
  - Amount of water in rainy season and dry season is flutiative.
  - The red technology for processing is less suitable with the water condition which quality is decreasing.

The water that is properly drink, has requairment standart,those are physis, chemical, bacteriologist requairment, of which is one unit. If there is on parameter that can not fulfill the requairment, the water is not proper to drink. According to Ministry of Health (No.492/MenKes/Per/IV/2010) Republic of Indonesia.

**C. Water Processing Theory**

According to Joko (2010), there are two kinds of water processing which is commonly used for this, namely:

- Complete processing; here, the standard water experienced complete processing namely: physical, chemical, and bacteriological processing. This processing is done for standard water of the turbid / dirty river
- Partial Processing; standard water only experience chemistry and or bacteriological processing.

In the complete processing, there are three levels of processing, namely:

- Physical Processing; to reduce / eliminate rough impurities, isolate mud and sand, reduce organic substances that exist in the water which will be processed. Physical processing is done without additional chemistry substance
- Chemical Processing; to help out the next processing, for example, placing alum that cut down on existing turbidity.
- Biology Processing; to kill/destroy bacteria especially bacterium which cause disease contained in water, for example: coliform bacteria causes stomachache. One of processing is increasing disinfectant (alum)

**D. Filtration Theory**

Filtration is a process which is used in water processing to separate pollutants (particulate) that is contained in water. In the process, water seeps and passes through the filter media so it will be accumulated on the surface of the filter and collected throughout the depth of the media in its path. Filters also have the ability to separate all the sizes of particulates including algae, viruses and soil colloids

Several types of media filter, namely:

- Single media filter is a filtration process which requiring a single media types, usually sand or anthracite (dissolving coal).
- Dual-media filter is a filtration process requiring two kinds of media types, usually sand and anthracite.
- Multi-media filter is a filtration process requiring three or more kinds of media types, usually use sand, anthracite and granite.

**E. Zeolite Theory**

According to Agung, et al (2007) zeolite was first discovered by Swede mineral expert in 1756, named AF Cronstedt. Naming zeolite came from the Greek, meaning "scum stone", agree with its nature, it will effervesce when it is heated at temperatures of 100 °C - 150 °C.

The composition of natural zeolite consist of a compound of alumino silicate hydrate and alkali metal element with chemical and physical properties such as a high degree of hydration, low space density, capable of cation exchange, uniform molecular channels in hydrated crystals, catalyst and conductivity of the flow of electricity (energy services and mineral resources of South Sulawesi province, 2001).

The basic framework of zeolite structure consist of tetrahedral units [AlO<sub>4</sub>] and [SiO<sub>4</sub>] which are interconnected through O atoms (Barrer 1987).




Fig. 1 The main framework of the zeolite

The structure Si<sup>4+</sup> can be replaced by Al<sup>3+</sup> (Figure 1), so the general formula of zeolite composition can be expressed as follows:

$$M_{x/n} [(AlO_2)_x (SiO_2)_y] m H_2O \quad (\text{Auerbach, et.al, 2003}) \quad (1)$$

With n: the valence of cation M (alkali / alkaline), x, y = number per unit cell of tetrahedron m = number per unit cell of water molecules and M = cation alkali / soil alkaline.

**F. The Properties of Zeolite**

Zeolites have chemical properties, including:

- Dehydration

According Barrer (1992), the nature of zeolite dehydration affect the nature of absorbtion. The uniqueness lies in the specific structure of zeolite pore. In natural zeolite, in the pores are cations or water molecules. When cations or water molecules are removed from the pores with a particular treatment, it will leave the empty zeolite pores.

b. Absorption

According to Khairinal (2000), under condition normal, void pores of zeolite crystal are filled with water molecules around the cation when heated the water will be released. The already heated zeolite can be used as gas or liquid adsorber.

c. Ion exchanger

According to Bambang, et. Al (1995), Ions in the pores are used to keep it under neutral condition. These ions can freely move so that the occurring ion exchange depends on their kind, size, and charge. Ion exchange characteristic of zeolite relies on their cation, anion, and temperature.

d. Filter

According to Bambang et. Al (1995), zeolite can filter or separate molecules based on their polarity, size, and shape because zeolite has a large pore and void. The Smaller molecule than void and pore of zeolite can go through the pore but the big one will be trapped.

G. Zeolite Function

According to Department of Energy and Mineral Resource, South Sulawesi (2001), zeolite can be used as :

1. Agricultural use, such as fertilizer
2. Animal feed supplement
3. Ammonium ion adsorber and other poisons in soil or for remediation of formerly mined land, and as filter in water purification system.

H. Zeolite Potency

According to South Sulawesi Department of Energy and Mineral Resource (2001), natural zeolite potency has been found in Sangkaropi and Kasinggiran Village, Toao and Mendilla, Sa'dang Balusu subdistrict, Luwu and North Toraja Regency. 122,952,000 ton zeolite has been found in 153.5 ha land with 59.27 hectares land filed using mining license.



Fig.2 (a) Zeolite of Sangkaropi



Fig. 2 (b). Zeolite of Kasinggiran

### III. METHOD

This research is divided into several stages :

1. Preparation Researches

At this stage of preparation and collection of research material, such as manufacturing of water treatment apparatus, sampling of natural zeolite in the district of North Toraja on South Sulawesi and sampling of Jeneberang river water were also prepared materials and laboratory equipment.

2. Implementation Research

Implementation of the research includes :

a. Test of Raw Water of Jeneberang River

- Raw water sampling of Jeneberang river is tested by means of AAS (Atomic Absorption Spectrophotometer), conducted to determine the metal content of Lead (Pb) in the raw water, but what is also observed : pH, DO, BOD<sub>5</sub> and COD.
- Place of swamp water sampling, location of water taken into the dam, amid dam and the water coming out of the dam.

b. Activation of natural zeolite

- Cleaned sample of Zeolite, then dried in the open air
- Variety of heats : 100 °C, 200 °C, 300 °C and 400 °C
- Samples of zeolites are crushed or pulverized and then sieved with a 170 mesh sieve to get the grain size of 170 mesh or 3 mm.

c. The activated zeolite samples are taken sufficiently to characterize using XRD type Rigakuminifleks II and SEM (Scanning Electron Microscope) or energy Dispersive Spectroscopy (SEM-EDX) type 3 Vega Tescan. The samples

were characterized to determine the content of compounds and natural zeolite pore surface of Toraja in South Sulawesi

- d. Test of raw water treatment model 4
  - Reservoir was filled by 8 liters of raw water that has been injected with 5 ppm of heavy metal lead (Pb)
  - Samples of zeolites that have been activated, weighed each; 20 grams, 35 grams, and 50 grams. Then put in a water treatment apparatus that is on the tube 2, 3, and 4.
  - Reservoir faucet is opened and drained for running into the water treatment apparatus and the contact time is calculated to produce clean water 1000ml. Same treatment for each weight variety.
  - The processed water is tested by means of AAS (Atomic Absorption Spectrophotometer) type Shimadzu AA 7000. The results showed that the value of concentration and the decreasing of the actual absorbance.

#### IV. RESULTS AND DISCUSSION

##### 1. Test Result of Samples in the Jeneberang River

Jeneberang river water sampling taken at three places, namely taking incoming dams, the water in the dam and the water coming out of the dam. The water samples were tested by means of AAS (Atomic Absorption Spectrophotometer), to determine the metal content of lead (Pb) in the raw water, the result can be observed in Table 1.

Table 1. AAS Test Results Lead (Pb) Jeneberang River

Sungai Jeneberang Bendungan Bili-Bili		Hasil AAS Pb	DO (mg/lt)	DHL ( $\Omega^{-1}$ )	BOD <sub>5</sub> (mg/lt)	COD (mg/lt)
pH (5,8)	Air masuk bendungan	-0,001 ppm	9,2	114,4	1,76	2,46
pH (6)	Air di dalam bendungan	-0,000 ppm	10,8	103,9	1,36	2,10
pH (5,5)	Air keluar dari bendungan	-0,001 ppm	9,8	128,2	1,76	3,20

##### 2. Results Characterization of Zeolite Toraja in South Sulawesi

- a. Figure of difragtogram Natural Zeolite Toraja, with the activation of heating: 100 °C, 200 °C, 300 °C and 400 °C by using X-Ray Diffraction type Rigaku Minifleks.

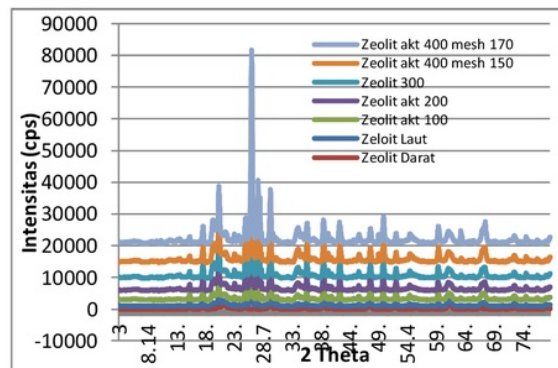


Fig. 3 Difragtogram natural Zeolite of South Sulawesi

TABLE 2. COMPOSITION OF ZEOLITES IN TORAJA WITH VARIATION OF TEMPERATURE

Conten of zeolite	Temperatute			
	100 °C (%)	200 °C (%)	300 °C (%)	400 °C (%)
Quartz, syn	90			45
Potassium Chloride	3,9			
Zeolite P. (Na)				
Quartz low HP, syn		2,98		
Muscovite-2M1		71,1		
Zeolite P. (Na)		25,9		
Quartz low, syn			66,1	

Muscovite-2M1			20	14
Zeolite F (Na), Pentasodium tecto-pentaalumo pentasilicate monohydrate			13.9	
Albite, ordered				26
Potassium Tecto-Alumotrisilicate				9
Zeolite Nu-6(2), Silicon Dioxide				2.5
Sodalite				3.1

b. Pore surface SEM image of natural zeolite results Toraja in South Sulawesi with activation of heating 100 °C, 200 °C, 300 °C and 400 °C

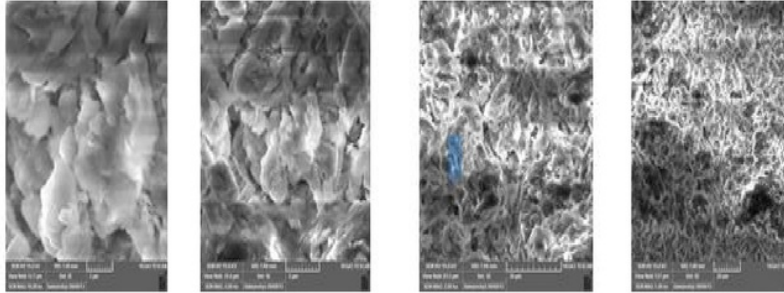


Fig. 4 Scanning Electron Microscope- Energy Dispersive Spectroscopy (SEM-EDX) tipe TESCAN 3 VEGA Activation of Natural Zeolite (100 °C, 200 °C, 300 °C dan 400 °C)

### 3. Test Results Water Treatment Equipment

Hasil running air baku yang telah disuntik dengan 5 ppm logam berat timbal (Pb)

Table 3. Hasil Uji Pengolahan Air Baku

No.	Activation	Zeolite (Gram)	Thickness (cm)	Begin pH	End pH	Water Volume (mL)	Time Contact (minutes)
1.	100 °C	20	1	5	6	1000	38
		35	2	5	6	1000	44
		50	3	5	5	1000	50
2.	200 °C	20	1	5	6	1000	28
		35	2	5	6	1000	32
		50	3	5	5	1000	60
3.	300 °C	20	1	5	6	1000	26
		35	2	5	6	1000	39
		50	3	5	5	1000	45
4.	400 °C	20	1	5	6	1000	44
		35	2	5	6	1000	60
		50	3	5	5	1000	77

### 4. Water Treatment results using AAS

The processed water is taken as 100 mL to be tested or injected into the AAS instrument, before the injected first made a standard solution or a standard curve in order to obtain test results as follows:

**Zeolite : 20 gram**

Table 4. Manufacture of standard solutions

The regression equation is:  $y = 0,0205x + 0,0007$

Concentration (x)	Absorbance (y)
1	0,0212
2	0,0417
3	0,0622
4	0,0827
5	0,1032
10	0,2057

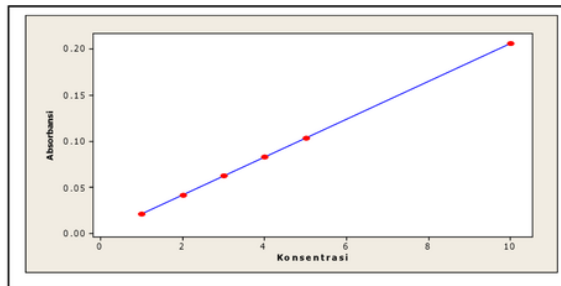


Table 5. The relationship between concentration and absorbance

Aktivasi(°C)	Actual concentration	absorbance	Time (dt)
100	0,2097	0,005	180
200	0,3073	0,007	180
300	0,4536	0,010	180
400	-0,0341	0,000	180

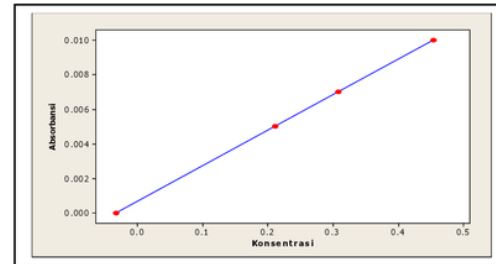


Fig. 6 Graph the relationship between concentration and absorbance

#### Analysis of Data

Table 6. Analysis of Test data with Raw water SSA Tool to lead (Pb) metal

Temperature	pH	Absorbance	concentration	$C_0$ (ppm)	$C_e$ (ppm)	$C_0 - C_e$	$q_e$ (mg/gr)
100 °C	6	0,005	0,2097	5	0,2097	4,7903	0,0239
200 °C	6	0,007	0,3073	5	0,3073	4,6927	0,0234
300 °C	6	0,010	0,4536	5	0,4536	4,5464	0,0227
400 °C	6	0,000	-0,0341	5	-0,0341	5,0341	0,0251

2

The amount of metal ion Lead (Pb) were adsorbed was calculated by the equation:

(2)

$$q_e = \frac{(c_0 - c_e)}{W} \cdot V$$

Where:

- $q_e$  = amount of metal ion Lead (Pb) adsorbed (mg / g)
- $C_0$  dan  $C_e$  = concentration of metal ions before and after the adsorption of Pb (mg / L)
- $V$  = volume of solution (L)
- $W$  = weight of adsorbent (zeolite) used(g)

Regression equation:

$$\text{Absorbance} = 0.000699 + 0.0205 \text{ Concentration } (C_e), R^2 = 100 \%$$

A high correlation between concentration and absorbance is indicated by the value of  $R^2 = 100 \%$  as shown in Fig. 7.

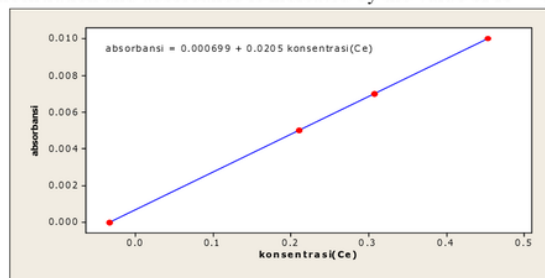


Fig.7 Regression test the relationship between concentration and absorbance

A high correlation between concentration and absorbance is indicated by the value of  $R^2 = 100\%$  as shown in Table 7.

**Analysis of testing**

Table 7. Analysis of testing Langmuir model and Freundlich

20 gram					
Absorbance	Concentration (Ce)	qe	log (ce)	log (qe)	ce/qe
0.005	0.2097	0.0239	-0.6784	-1.6216	8.774059
0.007	0.3073	0.0234	-0.51244	-1.63078	13.13248
0.01	0.4536	0.0227	-0.34333	-1.64397	19.98238
0	-0.0341	0.0251	#NUM!	-1.60033	-1.35857

**Langmuir Model**

Regression equation:

$$ce/qe = -0.076 + 43.6 \text{ Concentration (Ce)}, R^2 = 99.8\%$$

Equilibrium model (isothermal) absorption conducted to determine the effectiveness of a process of absorption of the metal ions Pb and adsorbent (zeolite) or based on the linearity of the relationship  $Ce / qe$  vs.  $Ce$

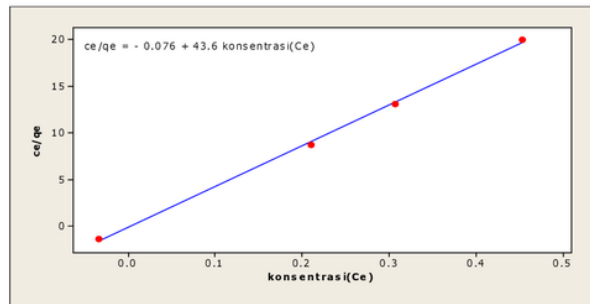


Fig. 8 Graph testing Langmuir models

A high correlation between  $ce / qe$  versus  $ce$ , this is indicated by the value of  $R^2 = 99.8\%$

**Freundlich Model**

Regression equation:

$$\log (qe) = -1.67 - 0.0668 \log (ce), R^2 = 98.1\%$$

Freundlich isothermal or equilibrium models, also observed by the linearity of the relationship  $\log qe$  versus  $\log Ce$  shown in Fig. 9.

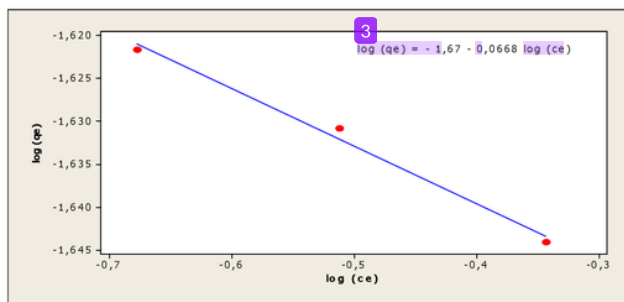


Fig. 9 Graph Testing Freundlich models

A high correlation between  $\log qe$  versus  $\log ce$ , this is indicated by the value of  $R^2 = 98.1\%$

**Zeolite : 35 gram**

Table 8. Manufacture Standard Solution  
 Regression equation:  $y = 0,0205x + 0,0007$

Concentration (x)	Absorbance (y)
1	0,0212
2	0,0417
3	0,0622
4	0,0827
5	0,1032
10	0,2057

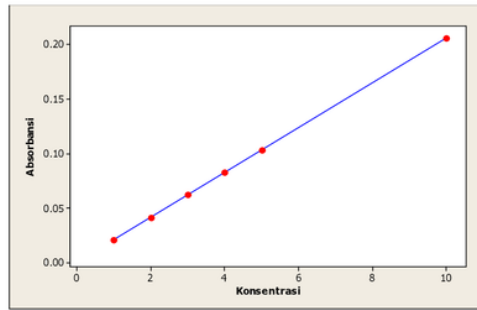


Figure 10. Standard curva

Table 9. The relationship between concentration and absorbance

Activation (°C)	Actual concentration	absorbance	Time (dt)
100	0,3560	0,005	180
200	0,1121	0,007	180
300	-0,0341	0,010	180
400	0,1609	0,000	180

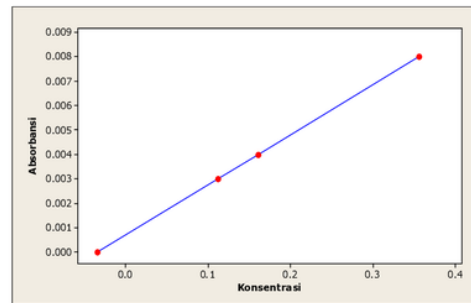


Fig. 11 Graph the relationship between concentration and absorbanc

#### Analysis of Data

Table 10. Analisis test data with the raw water SSA tool to lead (Pb) metal

Temperature (°C)	pH	Absorbance	concentration	$C_o$ (ppm)	$C_e$ (ppm)	$C_o - C_e$	$q_e$ (mg/gr)
100	6	0,008	0,3560	5	0,3560	4,644	0,0132
200	6	0,003	0,1121	5	0,1121	4,8879	0,0139
300	6	0,000	-0,0341	5	-0,0341	5,0341	0,0143
400	6	0,004	0,1609	5	0,1609	4,8391	0,0138

#### Analisis of Testing

Table 11. Analisis Freundlich model testing

35 gram					
Absorbance	Concentration ( $C_e$ )	$q_e$	$\log (c_e)$	$\log (q_e)$	$c_e/q_e$
0.008	0.356	0.0132	-0.44855	-1.87943	26.9697
0.003	0.1121	0.0139	-0.95039	-1.85699	8.064748
0	-0.0341	0.0143	#NUM!	-1.84466	-2.38462
0.004	0.1609	0.0138	-0.79344	-1.86012	11.65942

#### Langmuir Model

Regression equation:  $c_e/q_e = -0.138 + 75.4 \text{ Concentration } (C_e)$ ,  $R^2 = 99.9\%$

Equilibrium model (isothermal) absorption conducted to determine the effectiveness of a process of absorption of the metal ions Pb and adsorbent (zeolite) or based on the linearity of the relationship  $C_e / q_e$  versus  $C_e$

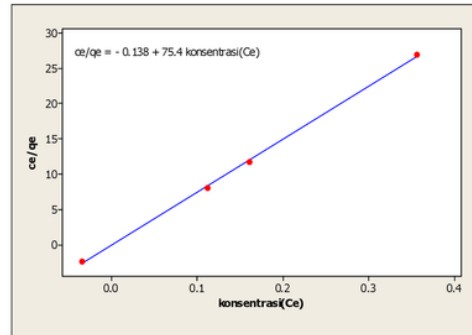


Fig.12 Graph Testing Langmuir models

A high correlation between  $ce / qe$  versus  $ce$ , this is indicated by the value of  $R^2 = 99.9 \%$

**Freundlich Model**

Regression equation:

$$\log (qe) = - 1.90 - 0.0466 \log (ce), R^2= 93.5\%$$

Freundlich isothermal or equilibrium models, also observed by the linearity of the relationship  $\log qe$  versus  $\log Ce$  shown in Fig. 13.

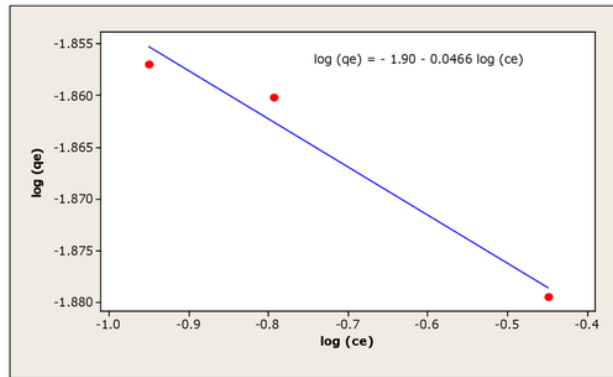


Fig. 13 Graph Testing Freundlich models

A high correlation between  $\log qe$  versus  $\log ce$ , this is indicated by the value of  $R^2 = 93.5 \%$

**Zeolite : 50 gram**

Table 12. Manufacture Standard Solution

Regression equation:  $y = 0,0205x + 0,0007$

Concentration (x)	Absorbansi (y)
1	0,0182
2	0,0333
3	0,0484
4	0,0635
5	0,0786
10	0,1541

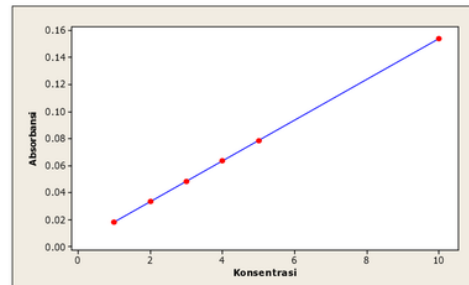


Fig. 14 Standard curva

Table 13. The relationship between concentration and absorbance

Activation (°C)	Actual Concentration	Absorbance	Time (dt)
100	-0,1986	0,0001	180
200	-0,2119	-0,0001	180
300	-0,2119	-0,0001	180
400	0,2582	0,0071	180

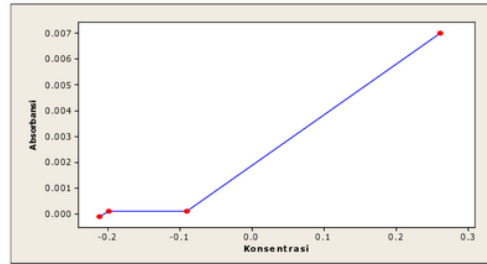


Fig. 15 Graph the relationship between concentration and absorbance

### Analysis of Data

Equilibrium model (isothermal) absorption conducted to determine the effectiveness of a process of absorption of the metal ions Pb and adsorbent (zeolite) or based on the linearity of the relationship  $C_e / q_e$  vs.  $C_e$

Table 14. Analisis of test data with the raw water SSA Tool to lead (Pb) metal

Temperature (°C)	pH	Absorbance	concentration	$C_o$ (ppm)	$C_e$ (ppm)	$C_o - C_e$	$q_e$ (mg/gr)
100	5	0,0001	-0,1986	5	-0,1986	5,1986	0,0103
200	5	-0,0001	-0,2119	5	-0,2119	5,2119	0,0104
300	5	-0,0001	-0,2119	5	-0,2119	5,2119	0,0104
400	5	0,0071	0,2582	5	0,2582	4,7418	0,0094

Regression equation:

Absorbance =  $0.00314 + 0.0153$  Concentration (Ce),  $R^2 = 100\%$

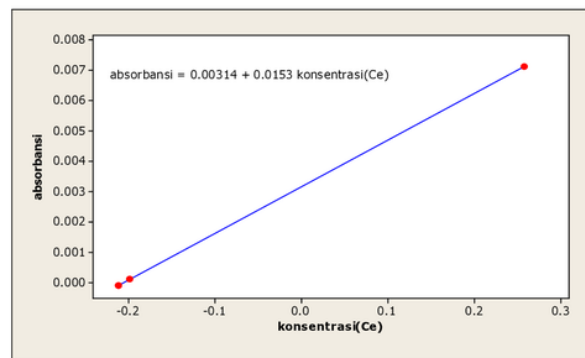


Fig. 16 Regression test the relationship between concentration and absorbance

A high correlation between concentration and absorbance is indicated by the value of  $R^2 = 100\%$  as shown in Fig. 16.

### Analysis of Testing

Table 15. Analysis testing Langmuir model

50 gram					
absorbance	concentration (Ce)	qe	log (ce)	log (qe)	ce/qe
0.0001	-0.1986	0.0103	#NUM!	-1.98716	-19.2816
-0.0001	-0.2119	0.0104	#NUM!	-1.98297	-20.375
-0.0001	-0.2119	0.0104	#NUM!	-1.98297	-20.375
0.0071	0.2582	0.0094	-0.58804	-2.02687	27.46809

### Langmuir Model

Regression equation:

$$ce/qe = 1.14 + 102 \text{ concentration (Ce), } R^2 = 100 \%$$

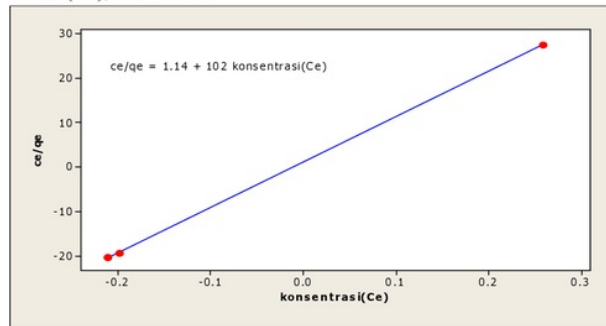


Fig. 17 Graph Testing Langmuir models

A high correlation between  $ce / qe$  versus  $ce$ , this is indicated by the value of  $R^2 = 100 \%$

### V. CONCLUSIONS

1. Characteristic examination result of natural zeolite in South Sulawesi using XRD and SEM obtained as follows :

#### a. Using XRD instrument

1. Natural land zeolite (without activation)
 

Cristobalite-beta high	9.8 %
Alunite	95.2%
2. Natural sea zeolite
 

Sodium alumos silicate	8.3 %
Zeolite Nu, Silicon	91.7 %
3. Sea Zeolite (100 °C activation) 170 mesh particle size
 

Quarts, Syn	90 %
Potassium Chloride	3.9 %
Zeolite P, Na	5.7 %
4. Sea Zeolite (200 °C activation) 170 mesh particle size
 

Quarts Low Hp, Syn	2.98 %
Muscovite, 2M1	71.1 %
Zeolite P, Na	25.9 %
5. Sea Zeolite (300 °C activation) 170 mesh particle size
 

Quarts Low, Syn	66.1 %
Muscovite, 2M1	20 %
Zeolite F (Na)	13.9 %
6. Sea Zeolite (400 °C activation) 170 mesh particle size
 

Quarts, Syn	45 %
Albute, ordered	26 %
Potassium tecto-aluminosilicate	1 %
Zeolite Nu-silicondioxide	2.5 %
Muscovite, 2M1	14 %
Sodalite	3.1 %

#### b. Using SEM

SEM result shows that surface pore of zeolite will be opened after 200 °C and C 100 °C heating while at 400 °C and 300 °C heating make the pore decline.

2. The absorbance of test results SSA tool (Atomic Absorption Spectrophotometer) for heavy metals lead (Pb) obtained
  - Absorbance value of 0000 to a weight of 20 grams
  - Absorbance value of 0.000 for the weight 35 grams
  - Absorbance value of -0001 to the weight of 50 grams
3. Results of regression analyzes the relationship between the absorbance with concentration obtained:  $R2 = 100 \%$
4. Langmuir model test results obtained:  $R2 = 99.8 \%$
5. Freundlich model test results obtained:  $R2 = 98.1 \%$
6. South Sulawesi natural zeolite can reduce the acid on the water.



#### ACKNOWLEDGMENT

1. This zeolite can be a cheap and easy material for water purification.
2. South Sulawesi natural zeolite can be the best solution to reduce pollutant or Pb ion in the environment.
3. This article can be used as the information for water treatment department.

#### REFERENCES

- [1] Effendi, H., 2003, *Study quality of water for management resource and marine environment*, Kanisius.
- [2] Hamzah, Y. et al., 2010, *Publication of Scientific and Research Plan*, Doctoral Program in Civil Engineering Graduate Program Hasanuddin University Vol. 1, page 1- 12.
- [3] Joko, T., 2010, *Production Unit in Water Supply System*, Yogyakarta, Graha Science.
- [4] Nusa, I. S., and Satmoko, Y., 2008, *Issues and Strategies in Indonesian Water Supply*, ([http://www.kelair.bppt.go.id/publications/books\\_of\\_drinking\\_water.html](http://www.kelair.bppt.go.id/publications/books_of_drinking_water.html)).
- [5] Rahman, A., and Hartono, B., 2004, *Water Filtration With Natural Zeolite To Lower Levels of Iron and Manganese*, Makara Journal, Health, 1 (8) ([http://www.journal.ui.ac.id/upload/artikel/01-filtration\\_water-ARahman.pdf](http://www.journal.ui.ac.id/upload/artikel/01-filtration_water-ARahman.pdf)).
- [6] Report of Pre-Feasibility Study, 2001, *Factory Development of Zeolite in North Toraja and Luwu Regency*, Department of Energy and Mineral Resources of South Sulawesi.
- [7] Selintung, M., dan Syahrir. S., 2012, *Study of Water Management through Quartz Sand Filter (Case Study Tiroang River)*, Department of Civil Engineering, University of Hasanuddin.
- [8] Sennang, S., 2010, *Availability Issues and Challenges the Municipality Water of Ujung Pandang*, HATHI Ujung Pandang Branch, 1995.
- [9] Sinle, E.P., 2007, *Zeolites As Multipurpose Minerals*, [http://www.chem-is-try.org/artikel - Chemistry/chemistry - material/Zeolite - multy-fungtion- Decision Matter of Health of the Republic of Indonesia No 907/ Health Minister/SK/VII/2002 Terms of Safeguarding Drinking Water Quality](http://www.chem-is-try.org/artikel-Chemistry/chemistry-material/Zeolite-multy-fungtion-Decision%20Matter%20of%20Health%20of%20the%20Republic%20of%20Indonesia%20No%20907/Health%20Minister/SK/VII/2002%20Terms%20of%20Safeguarding%20Drinking%20Water%20Quality).
- [10] Srihapsari, D., 2006, *Use of Natural Zeolite that has been activated with HCl solution to Absorb Metals Causes of Water Hardness*, Chemical Thesis, State University of Semarang.
- [11] Sujarwadi, 1997, *Overview About Zeolite*, Development Center of Mineral Technology in Bandung.

ORIGINALITY REPORT

% **10**  
SIMILARITY INDEX

% **8**  
INTERNET SOURCES

% **2**  
PUBLICATIONS

% **0**  
STUDENT PAPERS

PRIMARY SOURCES

**1** [ajouronline.com](http://ajouronline.com) % **7**  
Internet Source

**2** M.S. Mahmoud, Samah A. Mohamed. "Calcium alginate as an eco-friendly supporting material for Baker's yeast strain in chromium bioremediation", HBRC Journal, 2017 % **1**  
Publication

**3** H. A. Shawky, A. El-Hag Ali, R. A. El Sheikh. "Characterization and adsorption properties of the chelating hydrogels derived from natural materials for possible use in the improvement of groundwater quality", Journal of Applied Polymer Science, 2006 % **1**  
Publication

**4** [www.iptek.its.ac.id](http://www.iptek.its.ac.id) <% **1**  
Internet Source

**5** [www.ajouronline.com](http://www.ajouronline.com) <% **1**  
Internet Source

**6** [link.springer.com](http://link.springer.com) <% **1**  
Internet Source

---

7

temuilmiah.iplbi.or.id

Internet Source

<% 1

---

8

journal.akprind.ac.id

Internet Source

<% 1

---

9

docobook.com

Internet Source

<% 1

---

---

EXCLUDE QUOTES ON

EXCLUDE  
BIBLIOGRAPHY ON

EXCLUDE MATCHES < 5  
WORDS