

2023_AIP_Rudi_030009_1_5.012
6198.pdf
by

Submission date: 14-May-2023 06:55AM (UTC+0700)

Submission ID: 2092331426

File name: 2023_AIP_Rudi_030009_1_5.0126198.pdf (1.5M)

Word count: 2990

Character count: 14769

4 RESEARCH ARTICLE | APRIL 25 2023

Numerical simulation of ballistic impact behavior on soft body armor based carbon fiber reinforced polymers composite

Rudi; Muhammad Syahid ✉; Azwar Hayat

10

AIP Conference Proceedings 2630, 030009 (2023)
<https://doi.org/10.1063/5.0126198>



CrossMark

Articles You May Be Interested In

2 Combination of natural fiber *Boehmeria nivea* (ramie) with matrix epoxide for bullet proof vest body armor

AIP Conference Proceedings (December 2015)

Modeling of mechanical properties of composite structures taking into account military needs

AIP Conference Proceedings (February 2019)

22 Ballistic performance test of multiple reinforcements composite armor vest

AIP Conference Proceedings (July 2018)

Downloaded from http://pubs.aip.org/aip/acp/article-pdf/doi/10.1063/5.0126198/16995146/030009_1_5.0126198.pdf

Time to get excited.
Lock-in Amplifiers – from DC to 8.5 GHz

[Find out more](#)

Zurich Instruments

Numerical Simulation of Ballistic Impact Behavior on Soft Body Armor Based Carbon Fiber Reinforced Polymers Composite

Rudi^{a)}, Muhammad Syahid^{b)}, and Azwar Hayat^{c)}

¹⁵ Department of Mechanical Engineering, Faculty of Engineering, Hasanuddin University, Makassar, Indonesia

^{a)}rudyamme@gmail.co³²

^{b)}Corresponding author: syahid@unhas.ac.id

^{c)}azwar.hayat@unhas.ac.id

Abstract. Bulletproof vests are made to protect the human body from bullets that cause injuries or other dangerous conditions. Research on composite materials as bulletproof vests continues to develop to get bulletproof vests that are more flexible and lighter. Carbon Fiber Reinforced Polymers (CFRP) composites are widely developed as soft body armor materials because they have high strength, good impact strength, ³¹ light weight. In this study, an analysis of the soft body armor bullet-proof vest made of carbon fiber reinforced plastic was carried out using ¹⁷ finite element analysis (FEA) method. The simulation was carried out in accordance with the national institute of justice standard 0101.06 U.S department of justice where the initial velocity of the bullet was 373 m/s for the soft body armor type by varying the thickness of the bulletproof vest until the optimal thickness was obtained. The simulation results show that the thicker a dinner vest, the better it will absorb impact energy, this is due to the nature of carbon fiber which is able to distribute stress evenly.

INTRODUCTION

The development of body armor vests has been starting since the invention of firearms. Initially, body armor was made of animal skin, then shields made of wood were made, until armor made of metal was invented. The use of this metal material still has the disadvantage namely it is very stiff and heavy, making it difficult for ¹⁴ user to move even though the level of security is quite high [1]. Based on its safety level, the NIJ standard classifies **body armor into two, namely soft body armor and hard body armor**. Hard **body armor** generally uses hard materials such ³⁵ ceramics and metal, while soft body armor uses fiber as a material for making body armor [2]. The fiber must have **low density, high tensile modulus, and low elongation** in order to be used in body armor application [3]. ³⁹

Currently, fiber types such as Kevlar, Nomex, Twaron and Dyneema are widely used **to improve the ballistic performance of soft body armor** [2]. Kevlar, with its promising performance, has been used in ballistic and bullet-proof applications such as helmets, vests, and various other equipment that can provide protection to the user [4]. However, the high price and the difficulty of obtaining it domestically are still a serious problem in the use of the fiber material. With the widespread use of carbon fiber in various fields such as aircraft and automotive due to its strength, high rigidity, light weight, and high penetration resistance makes this fiber easily obtained domestically [5].

Research on the comparison of ballistic impact properties between plastic-reinforced carbon fibers and metal structures shows that plastic-reinforced carbon fibers can withstand higher impacts and absorb energy better than metal structures [5]. Carbon fiber composites and hollow glass microspheres with a thickness of 20mm are eligible to be used as body armor because it can release 138.77 J of energy with a penetration depth of below 44mm [6]. In terms of retarding the rate of bullets, the polymer composite which is added with a layer of carbon fiber can withstand the rate of bullets well, namely 13mm before impact to 5mm after impact [7]. On the other hand, body armor made of a composite material of polyester resin and carbon fiber which has a thickness of 15mm can withstand the bullet rate of the Pindad G2 Elite Pistol with a shooting distance of 15 meters [8].

In this study, numerical simulations of the ballistic impact behavior of bullet-proof vests made of carbon fiber composites with plastic reinforcement are carried out to determine the optimal thickness that can withstand the rate of bullets with residual kinetic energy values below 170 J.

MATERIALS AND METHODS

Simulation is done by using the finite element method. The modeling consists of two parts, namely the bullet and plate models and then assembled. The bullet modeled in the form of a rigid body and the plate is modeled in a deformable form. The simulation modeling can be seen in Figure 1. The mechanical properties of composite plates can be seen in table 1.

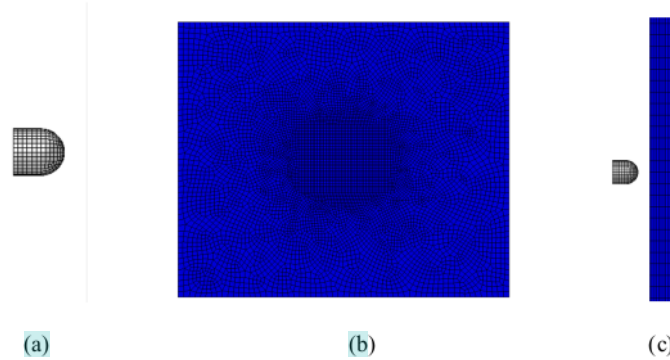


FIGURE 1. Model (a) bullet, (b) composite plate and (c) bullet and composite plate assembly

The thickness of the plastic-reinforced carbon fiber composite is varied from 10 layers to 30 layers in multiples of 5 layers. The speed of the bullet is 373 m/s with a weight of 8.1 gr. The value is in accordance with the NIJ standard for level II vests.

TABLE 1. Material properties of user material model used in Abaqus simulations for composite[9]

Notation	Properties	Magnitude
E ₁₁	Young's modulus (GPa)	235
E ₂₂	Young's modulus (GPa)	17
E ₃₃	Young's modulus (GPa)	17
μ ₁₂	Poisson's ratio	0.32
μ ₁₃	Poisson's ratio	0.32
μ ₂₃	Poisson's ratio	0.32
G ₁₂	Shear modulus (GPa)	4.5
G ₁₃	Shear modulus (GPa)	4.5
G ₂₃	Shear modulus (GPa)	2.5
X _{1t}	Tensile failure stress (MPa)	3900
X _{1c}	Compressive failure stress (MPa)	2400
X _{2t}	Tensile failure stress (MPa)	111
X _{2c}	Compressive failure stress (MPa)	290
X _{3t}	Tensile failure stress (MPa)	50
X _{3c}	Compressive failure stress (MPa)	290
S ₁₂	Failure shear stress (MPa)	120
S ₁₃	Failure shear stress (MPa)	137
S ₂₃	Failure shear stress (MPa)	90
ρ	Density (kg/m ³)	2190
β	Damping parameter	10 ⁻⁹

RESULT AND DISCUSSION

When the bullet hits the composite plate, the kinetic energy of the bullet will move to the plate so that the bullet will have a decrease in kinetic energy. The decrease in the kinetic energy of the bullet can be seen in Figure 2.

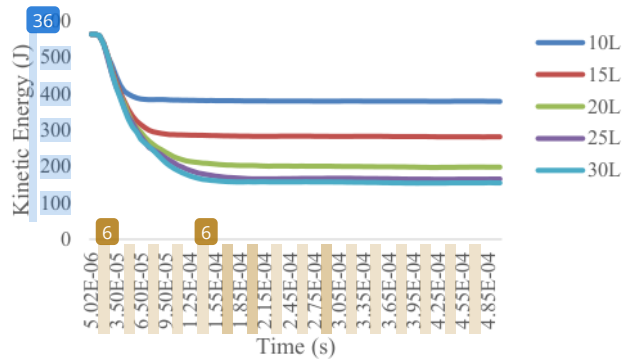


FIGURE 2. Graph of the decrease in the kinetic energy of the bullet

The bullet will experience a sudden decrease in kinetic energy when it collides with the composite plate. On a 10-layer composite plate, a sudden decrease in the kinetic energy of the bullet occurs in the time range between 10 microseconds and 75 microseconds and then continues with a constant decrease in kinetic energy. In the 15-layer composite plate, a sudden decrease in the kinetic energy of the bullet occurs in the time range between 10 microseconds and 100 microseconds and then continues with a constant decrease in kinetic energy. On a 20-layer composite plate, a sudden decrease in the kinetic energy of the bullet occurs in the time range between 10 microseconds and 130 microseconds then continues with a constant decrease in kinetic energy. In a 25-layer composite plate, a sudden decrease in the kinetic energy of the bullet occurs in the time range between 10 microseconds and 165 microseconds and then continues with a constant decrease in kinetic energy. On a 30-layer composite plate, a sudden decrease in the bullet kinetic energy occurs in the time range between 10 microseconds and 180 microseconds and then continues with a constant decrease in kinetic energy. The difference in the time span of decreasing the kinetic energy of the bullet is caused by the difference in the number of layers on each composite plate. The higher the number of layers on composite plate, the higher the time required for the bullet to penetrate the composite plate. This is due to the increase in the thickness of the composite plate increasing the ballistic resistance [5]. The magnitude of the decrease in the kinetic energy of the bullet when it penetrates the composite plate for 0.5 ms for each number of layers can be seen in Figure 3.

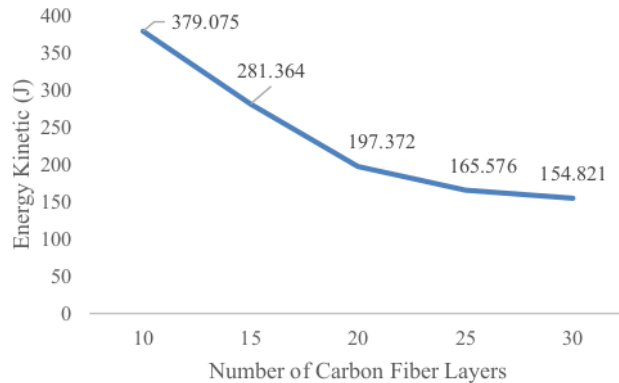


FIGURE 3. Graph of the decrease in the kinetic energy of the bullet

The decrease in the kinetic energy of the bullet when it collides with the composite plate is caused by the absorption of energy by the composite plate. The kinetic energy of the bullet is absorbed by the composite plate in various ways such as fiber failure, delamination, fiber deformation, matrix cracking, and plaque build-up on the fiber [10]. The energy absorbed by the composite plate from the kinetic energy of the bullet will be converted into the internal energy of the vest. The increase in the internal energy of the vest can be seen in figure 4.

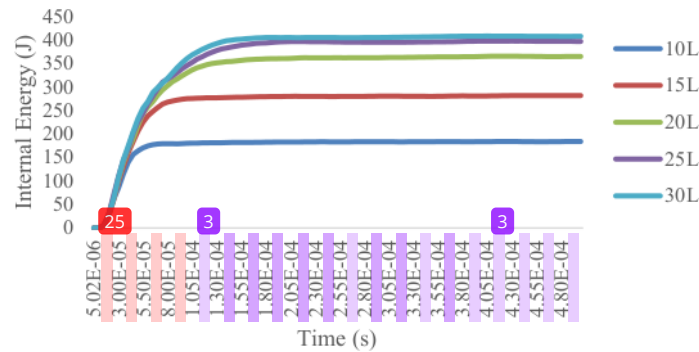


FIGURE 4. Graph of energy increase

Since the internal energy is the energy absorbed by the composite plate when the bullet collides with the composite plate, the increase in the internal energy of the composite plate is directly proportional to the duration of penetration of the bullet into the plate. The longer the duration of penetration of the bullet into the plate, the greater the energy that can be absorbed by the composite plate will be. The amount of energy that can be absorbed by the composite plate at 500 microseconds can be seen in Figure 5.

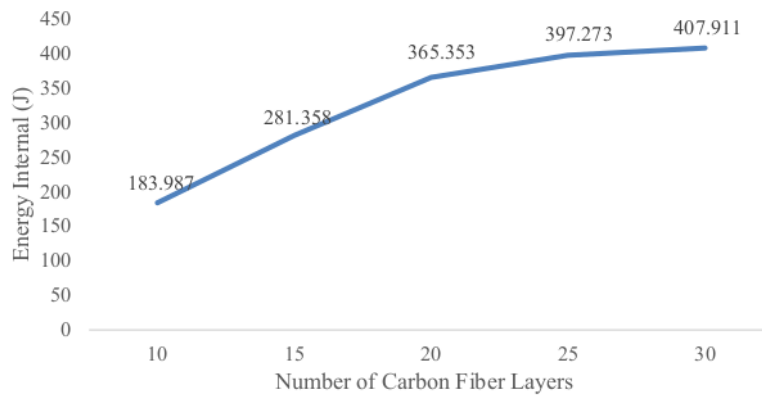


FIGURE 5. Graph of the increase value in internal energy

Besides phenomenon of a decrease in the kinetic energy of the bullet and an increase in the internal energy of the composite plate, a decrease in the velocity of the bullet also occurs when the bullet collides with the composite plate. The decrease in the velocity of the bullet can be seen in Figure 6. The initial velocity of the bullet is 373m/s.

The bullet velocity decreases significantly when the bullet collides with the composite plate. On the 10-layer composite plate, the decrease in bullet velocity occurs in the time range of 15 microseconds to 65 microseconds. then there is a constant decrease in bullet velocity. On the 15-layer composite plate, the decrease in bullet velocity occurs in the time range of 15 microseconds to 100 microseconds, then there is a constant decrease in bullet velocity. On a 20-layer composite plate, a decrease in bullet velocity occurs in the time range of 15 microseconds to 125

microseconds, then there is a constant decrease in bullet velocity. On a 25-layer composite plate, the decrease in bullet velocity occurs in the time range of 15 microseconds to 155 microseconds, then there is a constant decrease in bullet velocity. On a 30-layer composite plate, the decrease in bullet velocity occurs in the time range of 15 microseconds to 165 microseconds, then there is a constant decrease in bullet velocity.

The decrease in bullet velocity is directly proportional to the energy absorption ability of the composite plate; the higher the energy absorption value, the higher the decrease in bullet velocity will be. The value of the final bullet velocity at 500 microseconds can be seen in Figure 7.

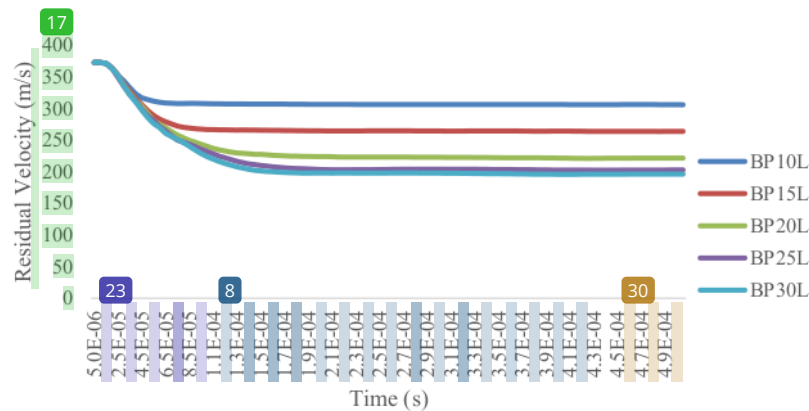


FIGURE 6. Graph of the decrease in bullet velocity

During penetration, the bullet will continue to provide impact energy due to the bullet kinetic until the bullet stops. The number of layers affects the rate of hold of the bullet. The greater the number of layers of composite plates, the greater the resistance to the bullet rate will be.

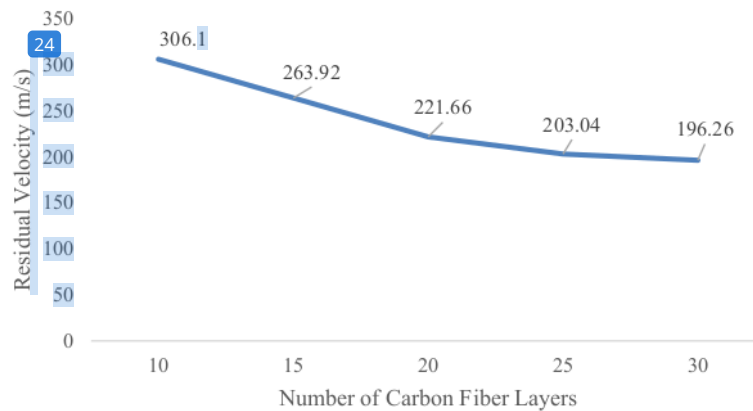


FIGURE 7. Graph of the decrease in bullet velocity

In the figure 9, it can be seen that the composite plate with the number of layers of 10, 15 and 20 is not able to withstand the rate of bullets and fails and almost all failures occur locally. This is caused by the shock wave generated by the impact of the bullet [5]. While the plates with the number of layers of 25 and 30 can withstand the rate of bullets. This is because the kinetic energy of the bullet is mostly absorbed by the composite plate and the remaining energy is unable to penetrate the plate.

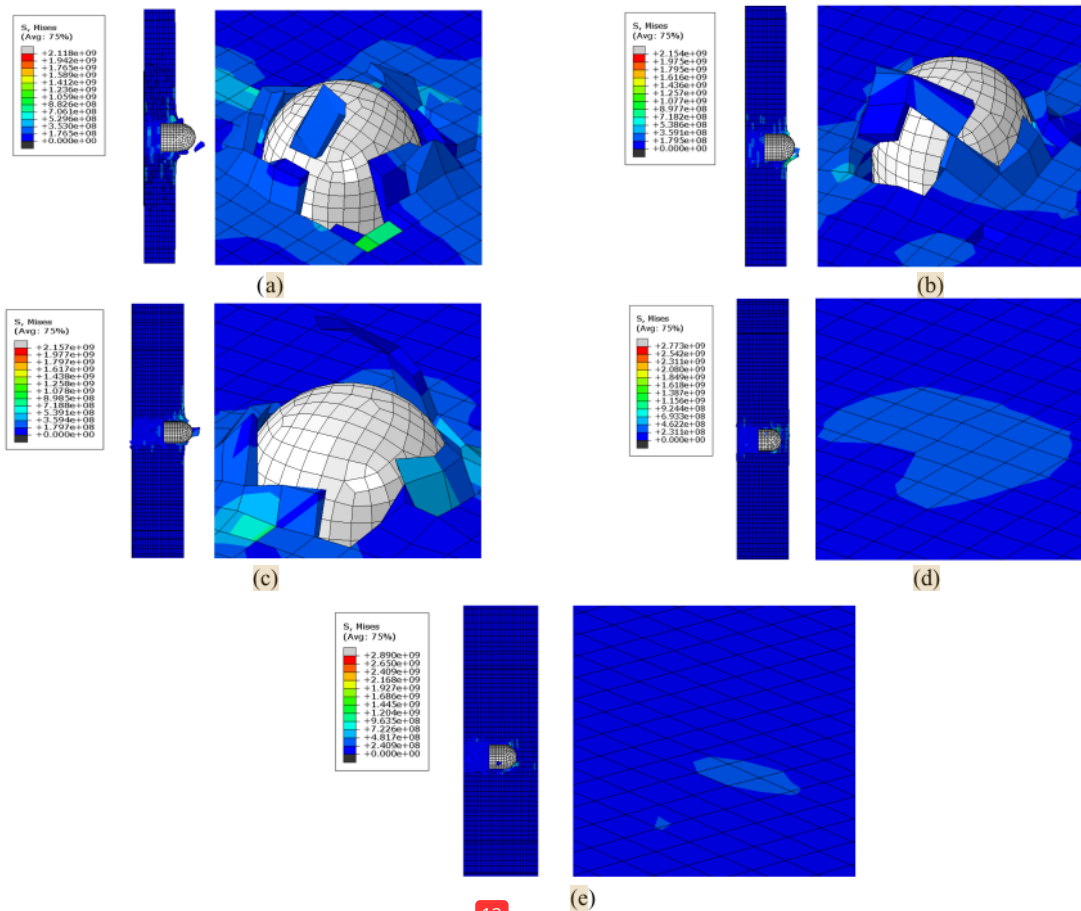


FIGURE 8. CFRP plate with the number of layer (a) 10 layers, (b) 15 layers, (c) 20 layers, (d) 25 layers, (e) 30 layers.

CONCLUSION

In this study, numerical simulations of the ballistic impact behavior of plastic-reinforced carbon fiber vests have been carried out. The number of layers on the composite plate has an effect on decreasing kinetic energy, increasing internal energy and decreasing bullet velocity. The greater the number of layers of the vest, the greater the value of the decrease in the kinetic energy of the bullet will be. Likewise, the increase in the internal energy of the composite plate increases with the increase in the number of layers of the composite plate. The decrease in bullet velocity is also affected by the number of layers of composite plates. Based on the simulation that has been done, the composite plate with the number of layers of 25 and 30 can withstand the rate of bullets with a residual kinetic energy of 165.5J and 154.8J, respectively. This residual kinetic energy value is still safe for the user's body.

REFERENCES

1. F. K. Hari Purnomo, Farham H.M Saleh, Joko Sulistio, History and Design of Body Armor. Universitas Islam Indonesia, 1-2, (2018).
2. P. S. Rao, "A Review on Material & Ballistic Energy Absorption of Body Armour," International J. Res. Sci. Innov. p. 7. (2018).

3. U. Mawkhlieng, A. Majumdar, and A. Laha, "A review of fibrous materials for soft body armour applications," *RSC Adv.* pp. 1066–1068. (2019).
4. N. M. Nurazzi et al., "A review on natural fiber reinforced polymer composite for bullet proof and ballistic applications," *Polymers*, pp. 1–42. (2021).
5. E. A. Duodu, J. Gu, W. Ding, Z. Shang, and S. Tang, "Comparison of Ballistic Impact Behavior of Carbon Fiber/Epoxy Composite and Steel Metal Structures," *Iranian J. Sci. Technol. - Trans. Mech. Eng.* pp. 13–22. (2018).
6. M. A. Pulungan, S. Sutikno, and M. S. M. Sani, "Analysis of Bulletproof Vest Made from Fiber Carbon Composite and Hollow Glass Microsphere (HGM) in Absorbing Energy due to Projectile Impact," *IOP Conf. Ser. Mater. Sci. Eng.* p. 8. (2019).
7. D. S. Anakottapary, T. Gde, and T. Nindhia, "Interaction between Projectile and Composite Polymer Reinforced Granules Silicon Carbide and Carbon Fiber in Ballistic Testing" *Journal Energy and Manufacture*, p. 7. (2012).
8. K. A. Widi, G. Pohan, and W. Sujana, "Ballistic Test Analysis of Body Armor Products, Carbon Fiber Reinforced Polyester Composite Material, Jute and Cotton," *National Conference Proceeding*, p. 5. (2020).
9. A. Sharma, R. Mishra, S. Jain, S. S. Padhee, and P. K. Agnihotri, "Deformation behavior of single and multi-layered materials under impact loading," *Thin-Walled Struct.* pp. 193–204. (2018).
10. R. S. Sikarwar and R. Velmurugan, "Impact damage assessment of carbon fiber reinforced composite with different stacking sequence," *Journal Compos. Mater.* pp. 193–203. (2020).

ORIGINALITY REPORT

22%

SIMILARITY INDEX

16%

INTERNET SOURCES

13%

PUBLICATIONS

5%

STUDENT PAPERS

PRIMARY SOURCES

1	Colakoglu, Mehmet. "Investigation of the Ballistic Performance of Two Different Polymer Matrix Composites", Key Engineering Materials, 2007. Publication	1%
2	Hongchi Zhang, Liping Shi, Xiaoliang Ma, Lin Yang, Yesheng Zhong, Xiaodong He. "Impact resistance of boron carbide ceramics from hypersonic and supersonic impacts: A large-scaled molecular dynamics simulation study", Journal of Applied Physics, 2022 Publication	1%
3	mcf.gsfc.nasa.gov Internet Source	1%
4	asa.lib.lehigh.edu Internet Source	1%
5	link.springer.com Internet Source	1%
6	saber.ucv.ve Internet Source	1%

7	umpir.ump.edu.my Internet Source	1 %
8	Karouna-Renier, N.K.. "Accumulation of organic and inorganic contaminants in shellfish collected in estuarine waters near Pensacola, Florida: Contamination profiles and risks to human consumers", <i>Environmental Pollution</i> , 200701 Publication	1 %
9	Submitted to University of Leeds Student Paper	1 %
10	www.slideshare.net Internet Source	1 %
11	Submitted to Queen Mary and Westfield College Student Paper	1 %
12	www.geokniga.org Internet Source	1 %
13	Haocheng Xu, Jing Li, Xinxin Ma, Wukun Yi, Hankun Wang. "Intelligent analysis technology of bamboo structure. Part II: The variability of radial distribution of fiber volume fraction", <i>Industrial Crops and Products</i> , 2021 Publication	1 %
14	Sanchi Arora, Aranya Ghosh. "Evolution of Soft Body Armor", Wiley, 2018 Publication	1 %

15	cot.unhas.ac.id Internet Source	1 %
16	Submitted to Universiti Putra Malaysia Student Paper	<1 %
17	www.dtic.mil Internet Source	<1 %
18	Composite Structures, 1991. Publication	<1 %
19	dokumen.pub Internet Source	<1 %
20	pubs.aip.org Internet Source	<1 %
21	stdjet.scienceandtechnology.com.vn Internet Source	<1 %
22	Rafał Chatys, Martins Kleinhofs, Alexander Panich, Mateusz Kisiel. "Modeling of mechanical properties of composite structures taking into account military needs", AIP Publishing, 2019 Publication	<1 %
23	digital.library.unt.edu Internet Source	<1 %
24	earthquake.usgs.gov Internet Source	<1 %

25

www.crses.sun.ac.za

Internet Source

<1 %

26

Anesu Nyabadza, Mercedes Vázquez, Dermot Brabazon. "Modelling of Pulsed Laser Ablation in Liquid via Monte Carlo techniques: The effect of laser parameters and liquid medium on the electron cloud", Solid State Sciences, 2022

Publication

<1 %

27

Submitted to Cardiff University

Student Paper

<1 %

28

O Kurdi, S A Widyanto, G D Haryadi, A Suprihanto, I Yulianti, A Rahman. "Finite Element Stress Analysis of Acrylic with Embedded Optical Fibre Sensors", IOP Conference Series: Materials Science and Engineering, 2020

Publication

<1 %

29

Phadnis, V A, K S Pandya, N K Naik, A Roy, and V V Silberschmidt. "Ballistic impact behaviour of woven fabric composite: Finite element analysis and experiments", Journal of Physics Conference Series, 2013.

Publication

<1 %

30

www.nagra.ch

Internet Source

<1 %

www.researchgate.net

31

Internet Source

<1 %

32

Basri, , Indrabayu, and Andani Achmad.
"Gaussian Mixture Models optimization for counting the numbers of vehicle by adjusting the Region of Interest under heavy traffic condition", 2015 International Seminar on Intelligent Technology and Its Applications (ISITIA), 2015.

Publication

<1 %

33

Maoxun Wang, Huadong Yu, Jinkai Xu, Guangjun Chen, Bin Dai, Shen Wang.
"Amplitude effect on micro-hole drilling of 3D needled Cf/SiC by ultrasonic vibration",
Ceramics International, 2021

Publication

<1 %

34

Rahme, P.. "Experimental investigation of impact on composite laminates with protective layers", Composites Science and Technology, 20120118

Publication

<1 %

35

content.sciendo.com

Internet Source

<1 %

36

homeworkhelptutor.webs.com

Internet Source

<1 %

37

M. K. RATH, S. K. SAHU. "PARAMETRIC RESONANCE OF WOVEN FIBER LAMINATED

<1 %

COMPOSITE PLATES IN ADVERSE
HYGROTHERMAL ENVIRONMENT", Journal of
Multiscale Modelling, 2014

Publication

38

Stephanie Gonçalves Nunes, Riccardo Scazzosi, Andrea Manes, Sandro Campos Amico et al. "Influence of projectile and thickness on the ballistic behavior of aramid composites: Experimental and numerical study", International Journal of Impact Engineering, 2019

Publication

<1 %

39

Amin Khodadadi, Gholamhossein Liaghat, Alireza Taherzadeh-Fard, Davoud Shahgholian-Ghahfarokhi. "Impact characteristics of soft composites using shear thickening fluid and natural rubber–A review of current status", Composite Structures, 2021

Publication

<1 %

40

Lal, A., and B. N. Singh. "Stochastic Free Vibration of Laminated Composite Plates in Thermal Environments", Journal of Thermoplastic Composite Materials, 2010.

Publication

<1 %

