

# Elliptic\_Boundary\_Value\_Problems\_of\_Functionally\_Graded\_Media.pdf

*by*

---

**Submission date:** 23-Jun-2023 05:02PM (UTC+0700)

**Submission ID:** 2121347645

**File name:** Elliptic\_Boundary\_Value\_Problems\_of\_Functionally\_Graded\_Media.pdf (413.35K)

**Word count:** 4547

**Character count:** 18336



2 A boundary element method for a class of elliptic boundary value problems of functionally graded media



20 Nasaruddin Salam<sup>a</sup>, Amiruddin Haddade<sup>b</sup>, David L. Clements<sup>c</sup>, Moh. Ivan Azis<sup>d,\*</sup>

<sup>a</sup> Department of Mechanical Engineering, Hasanuddin University, Makassar, Indonesia

<sup>b</sup> Department of Physics, Hasanuddin University, Makassar, Indonesia

<sup>c</sup> Department of Applied Mathematics, University of Adelaide, Australia

<sup>d</sup> Department of Mathematics, Hasanuddin University, Makassar, Indonesia

ARTICLE INFO

MSC:  
65N38

Keywords:  
BEM  
Elliptic BVP  
FGM

ABSTRACT

8 A Boundary Element Method (BEM) is derived for obtaining solutions to a class of elliptic boundary value problems (BVPs) of functionally graded media (FGM). Some particular examples are considered to illustrate the application of the BEM.

24 Crown Copyright © 2017 Published by Elsevier Ltd. All rights reserved.

1. Introduction

25 Whereas the BEM provides an effective numerical procedure for the solution of BVPs for homogeneous media the same is not generally true for inhomogeneous media. In the case of the inhomogeneous media, the material is assumed to be a functionally graded material, i.e., the material properties vary spatially according to known smooth functions. BVPs for such media have governing equations with variable coefficients. A BEM for 2D diffusion-convection problems in homogeneous anisotropic media has been recently considered by Haddade, Salam, Khaeruddin and Azis in [17]. In recent years some progress toward finding numerical solutions to BVPs for FGM by using BEM has been made. Clements [2], Cheng [4,5], Rangogni [6], Shaw [7], Gipson et al. [8], Ang et al. [9], and Clements and Azis [10] considered the case for isotropic FGM.

In the case of anisotropic FGM there are few published studies. BVPs which are relevant for certain classes of problems for anisotropic FGM have been considered by Azis and Clements [11], Azis et al. [12], Azis and Clements [13], Azis and Clements [14,15]. An elliptic equation which is also relevant for a certain class of problems for anisotropic media has been considered by Clements and Rogers [1]. They obtained a boundary integral equation for the case when the coefficients in the equation depend on one spatial variable only. Specifically the equation considered by Clements and Rogers [1] takes the form

$$\frac{\partial}{\partial x_1} \left[ \lambda_{ij}(x_2) \frac{\partial \phi(x_1, x_2)}{\partial x_j} \right] = 0$$

11 where the coefficients  $\lambda_{ij}$  depend on  $x_2$  only and the repeated summation convention (summing from 1 to 2) is employed.

This paper is concerned with obtaining boundary integral equations for the solution of BVPs governed by equations of the form

$$\frac{\partial}{\partial x_i} \left[ \lambda_{ij}(x_1, x_2) \frac{\partial \phi(x_1, x_2)}{\partial x_j} \right] = 0 \quad (1)$$

Equations of this type govern the behavior of a wide class of BVPs of both isotropic and anisotropic FGM. Antiplane strain in elastostatics and plane thermostatics for anisotropic FGM are two areas for which the governing equation is of the type (1).

Several techniques will be considered for obtaining boundary integral equations for the solution of (1). For each technique it is necessary to place some constraint on the class of coefficients  $\lambda_{ij}$  for which the solution obtained is valid. Some numerical examples are considered to illustrate the application of the boundary integral equations. The analysis of this paper is purely formal; the main aim being to construct effective BEMs for classes of equations which fall within the type (1).

2. The boundary value problem

3 Referred to a Cartesian frame  $Ox_1x_2$  a solution to (1) is sought which is valid in a region  $\Omega$  in  $R^2$  with boundary  $\partial\Omega$  which consists of a finite number of piecewise smooth closed curves. On  $\partial\Omega_1$  the dependent variable  $\phi(\mathbf{x})$  ( $\mathbf{x} = (x_1, x_2)$ ) is specified and on  $\partial\Omega_2$

$$P(\mathbf{x}) = \lambda_{ij} (\partial\phi/\partial x_j) n_i \quad (2)$$

\* Corresponding author.

E-mail addresses: [nassalam.unhas@yahoo.co.id](mailto:nassalam.unhas@yahoo.co.id) (N. Salam), [amiruddinhaddade@yahoo.com](mailto:amiruddinhaddade@yahoo.com) (A. Haddade), [dclement@maths.adelaide.edu.au](mailto:dclement@maths.adelaide.edu.au) (D.L. Clements), [mohivanazis@yahoo.co.id](mailto:mohivanazis@yahoo.co.id) (Moh.I. Azis).

<http://dx.doi.org/10.1016/j.enganabound.2017.08.017>

Received 6 August 2017; Accepted 28 August 2017

0955-7997/Crown Copyright © 2017 Published by Elsevier Ltd. All rights reserved.

is specified where  $\partial\Omega = \partial\Omega_1 \cup \partial\Omega_2$  and  $\mathbf{n} = (n_1, n_2)$  denotes the outward pointing normal to  $\partial\Omega$ .

For all points in  $\Omega$  the matrix of coefficients  $[\lambda_{ij}]$  is a real symmetric positive definite matrix so that throughout  $\Omega$  Eq. (1) is a second order elliptic partial differential equation. Further, the coefficients  $\lambda_{ij}$  are required to be twice differentiable functions of the two independent variables  $x_1$  and  $x_2$ .

The method of solution will be to obtain boundary integral equations from which numerical values of the dependent variables  $\phi$  and  $P$  may be obtained for all points in  $\Omega$ . The analysis here is specially relevant to an anisotropic medium but it equally applies to isotropic media. For isotropy, the coefficients in (1) take the form  $\lambda_{11} = \lambda_{22}$  and  $\lambda_{12} = 0$  and use of these equations in the following analysis immediately yields the corresponding results for an isotropic medium.

### 3. Reduction to a constant coefficient equation

The coefficients  $\lambda_{ij}$  are required to take the form

$$\lambda_{ij}(\mathbf{x}) = \lambda_{ij}^{(0)} g(\mathbf{x}) \tag{3}$$

where the  $\lambda_{ij}^{(0)}$  are constants and  $g$  is a differentiable function of  $\mathbf{x}$ . Use of (3) in (1) yields

$$\lambda_{ij}^{(0)} \frac{\partial}{\partial x_i} \left( g \frac{\partial \phi}{\partial x_j} \right) = 0 \tag{4}$$

Let

$$\psi(\mathbf{x}) = g^{1/2}(\mathbf{x}) \phi(\mathbf{x}) \tag{5}$$

so that (4) may be written in the form

$$\lambda_{ij}^{(0)} \frac{\partial}{\partial x_i} \left[ g \frac{\partial (g^{-1/2} \psi)}{\partial x_j} \right] = 0$$

That is

$$\lambda_{ij}^{(0)} \left[ \left( \frac{1}{4} g^{-3/2} \frac{\partial g}{\partial x_i} \frac{\partial g}{\partial x_j} - \frac{1}{2} g^{-1/2} \frac{\partial^2 g}{\partial x_i \partial x_j} \right) \psi + g^{1/2} \frac{\partial^2 \psi}{\partial x_i \partial x_j} \right] = 0 \tag{6}$$

Use of the identity

$$\frac{\partial^2 g^{1/2}}{\partial x_i \partial x_j} = -\frac{1}{4} g^{-3/2} \frac{\partial g}{\partial x_i} \frac{\partial g}{\partial x_j} + \frac{1}{2} g^{-1/2} \frac{\partial^2 g}{\partial x_i \partial x_j}$$

permits (6) to be written in the form

$$g^{1/2} \lambda_{ij}^{(0)} \frac{\partial^2 \psi}{\partial x_i \partial x_j} - \psi \lambda_{ij}^{(0)} \frac{\partial^2 g^{1/2}}{\partial x_i \partial x_j} = 0$$

It follows that if  $g$  is such that

$$\lambda_{ij}^{(0)} \frac{\partial^2 g^{1/2}}{\partial x_i \partial x_j} + k g^{1/2} = 0 \tag{7}$$

then the transformation (5) carries the variable coefficients Eq. (4) to the constant coefficients equation

$$\lambda_{ij}^{(0)} \frac{\partial^2 \psi}{\partial x_i \partial x_j} + k \psi = 0 \tag{8}$$

where  $k$  is constant.

Also, substitution of (3) and (5) into (2) gives

$$P = -P^{[s]} \psi + P^{[w]} g^{1/2} \tag{9}$$

where

$$P^{[s]}(\mathbf{x}) = \lambda_{ij}^{(0)} \frac{\partial g^{1/2}}{\partial x_j} n_i \quad P(\mathbf{x}) = \lambda_{ij}^{(0)} \frac{\partial \psi}{\partial x_j} n_i \tag{31}$$

A boundary integral equation for the solution of (8) is given in Clements [3] in the form

$$\eta(\mathbf{x}_0) \psi(\mathbf{x}_0) = \int_{\partial\Omega} [\Gamma(\mathbf{x}, \mathbf{x}_0) \psi(\mathbf{x}) - \Phi(\mathbf{x}, \mathbf{x}_0) P^{[w]}(\mathbf{x})] d s(\mathbf{x}) \tag{10}$$

where  $\mathbf{x}_0 = (a, b)$  if  $(a, b) \notin \Omega \cup \partial\Omega$ ,  $\eta = 1$  if  $(a, b) \in \Omega$ ,  $\eta = \frac{1}{2}$  if  $(a, b) \in \partial\Omega$  and  $\partial\Omega$  has a continuously turning tangent at  $(a, b)$ .

The so called fundamental solution  $\Phi$  in (10) is any solution of the equation

$$\lambda_{ij}^{(0)} \frac{\partial^2 \Phi}{\partial x_i \partial x_j} + k \Phi = \delta(\mathbf{x} - \mathbf{x}_0)$$

and the  $\Gamma$  is given by

$$\Gamma(\mathbf{x}, \mathbf{x}_0) = \lambda_{ij}^{(0)} \frac{\partial \Phi(\mathbf{x}, \mathbf{x}_0)}{\partial x_j} n_i$$

where  $\delta$  is the Dirac delta function. For two-dimensional problems  $\Phi$  and  $\Gamma$  are given by

$$\Phi(\mathbf{x}, \mathbf{x}_0) = \begin{cases} \frac{K}{2\pi} \ln R & \text{if } k = 0 \\ \frac{iK}{4} H_0^{(2)}(\omega R) & \text{if } k > 0 \\ -\frac{K}{2\pi} K_0(\omega R) & \text{if } k < 0 \end{cases}$$

$$\Gamma(\mathbf{x}, \mathbf{x}_0) = \begin{cases} \frac{K}{2\pi} \frac{1}{R} \lambda_{ij}^{(0)} \frac{\partial R}{\partial x_j} n_i & \text{if } k = 0 \\ \frac{-iK\omega}{4} H_1^{(2)}(\omega R) \lambda_{ij}^{(0)} \frac{\partial R}{\partial x_j} n_i & \text{if } k > 0 \\ \frac{K\omega}{2\pi} K_1(\omega R) \lambda_{ij}^{(0)} \frac{\partial R}{\partial x_j} n_i & \text{if } k < 0 \end{cases} \tag{11}$$

where

$$K = \bar{\tau}/\zeta$$

$$\omega = \sqrt{|k|/\zeta}$$

$$\zeta = [\lambda_{11}^{(0)} + \lambda_{12}^{(0)}(\tau + \bar{\tau}) + \lambda_{22}^{(0)}\tau\bar{\tau}]^{1/2}$$

$$R = \sqrt{(\hat{x}_1 - \hat{a})^2 + (\hat{x}_2 - \hat{b})^2}$$

$$\hat{x}_1 = x_1 + \bar{\tau}x_2$$

$$\hat{a} = a + \bar{\tau}b$$

$$\hat{x}_2 = \bar{\tau}x_2$$

$$\hat{b} = \bar{\tau}b$$

where  $\tau$  and  $\bar{\tau}$  are respectively the real and the positive imaginary parts of the complex root  $\tau$  of the quadratic

$$\lambda_{11}^{(0)} + 2\lambda_{12}^{(0)}\tau + \lambda_{22}^{(0)}\tau^2 = 0 \tag{16}$$

and  $H_0^{(2)}$ ,  $H_1^{(2)}$  denote the Hankel function of second kind and order zero and order one respectively.  $K_0$ ,  $K_1$  denote the modified Bessel function of order zero, order one respectively,  $i$  represents the square root of minus one and the bar denotes the complex conjugate. A technique for finding the fundamental solution  $\Phi$  in Eq. (11) may be found in Azis [16].

The derivatives  $\partial R/\partial x_j$  needed for the calculation of the  $\Gamma$  in (11) are given by

$$\frac{\partial R}{\partial x_1} = \frac{1}{R}(\hat{x}_1 - \hat{a})$$

$$\frac{\partial R}{\partial x_2} = \bar{\tau} \left[ \frac{1}{R}(\hat{x}_1 - \hat{a}) \right] + \bar{\tau} \left[ \frac{1}{R}(\hat{x}_2 - \hat{b}) \right]$$

Use of (5) and (9) in (10) yields

$$\eta(\mathbf{x}_0) g^{1/2}(\mathbf{x}_0) \phi(\mathbf{x}_0) = \int_{\partial\Omega} \{ [g^{1/2}(\mathbf{x}) \Gamma(\mathbf{x}, \mathbf{x}_0) - P^{[s]}(\mathbf{x}) \Phi(\mathbf{x}, \mathbf{x}_0)] \phi(\mathbf{x}) - [g^{-1/2}(\mathbf{x}) \Phi(\mathbf{x}, \mathbf{x}_0) P(\mathbf{x})] d s(\mathbf{x}) \} \tag{32}$$

This equation provides a boundary integral equation for determining  $\phi$  and  $P$  at all points of  $\Omega$ .

The analysis of the section requires that the coefficients  $\lambda_{ij}$  are of the form (3) with  $g$  satisfying (7). This condition on  $g$  allows for considerable choice in the coefficients. For example, when  $k = 0$ ,  $g$  can assume a number of multiparameter forms with the parameters being employed

to fit  $\lambda_{ij}$  to numerical data for the coefficients. Possible multiparameter forms include

$$g(\mathbf{x}) = (\alpha_0 + \alpha_1 x_1 + \alpha_2 x_2)^2$$

$$g(\mathbf{x}) = [\Re \{ \alpha_0 + \alpha_1 z + \alpha_2 z^2 + \dots + \alpha_n z^n \}]^2$$

where the  $\alpha_i$  are constants,  $\Re$  denotes the real part of a complex number and  $z = x_1 + \tau x_2$ . More generally, the square of the real part of any analytical function of the complex variable  $z$  can serve as a possible form for  $g$ . For the case when  $k \neq 0$  some possible multiparameter forms of  $g$  are

$$g(\mathbf{x}) = [A \cos(\alpha_m x_m)]^2 \quad \text{with} \quad \lambda_{ij}^{(0)} \alpha_i \alpha_j = k \quad (12)$$

$$g(\mathbf{x}) = [A \exp(\alpha_m x_m)]^2 \quad \text{with} \quad \lambda_{ij}^{(0)} \alpha_i \alpha_j = -k \quad (13)$$

where  $A, \alpha_m$  are real constants.

#### 4. Further reduction to constant coefficients

The analysis of this paper has so far been concerned with coefficients which fall within the general class given by (3). The following analysis seeks to consider the case when the coefficients  $\lambda_{ij}(\mathbf{x})$  are not all proportional to the same function of  $\mathbf{x}$  and thus fall outside the general class given by (3).

Attention will be restricted to anisotropic media for which the media have symmetry properties which lead to the coefficient  $\lambda_{12}$  being zero. In this case Eq. (1) becomes

$$\frac{\partial}{\partial x_1} \left[ \lambda_{11}(x_1, x_2) \frac{\partial \phi}{\partial x_1} \right] + \frac{\partial}{\partial x_2} \left[ \lambda_{22}(x_1, x_2) \frac{\partial \phi}{\partial x_2} \right] = 0 \quad (14)$$

It will be further assumed that the coefficients  $\lambda_{11}$  and  $\lambda_{22}$  have variable separable forms so that they can be written in the form

$$\lambda_{11}(x_1, x_2) = X_1(x_1)Y_1(x_2) \quad (15)$$

$$\lambda_{22}(x_1, x_2) = X_2(x_1)Y_2(x_2) \quad (16)$$

Substitution of (15) and (16) into (14) yields

$$\frac{\partial}{\partial x_1} \left[ X_1(x_1) \frac{\partial \phi}{\partial x_1} \right] + \frac{1}{Y_1(x_2)} \frac{\partial}{\partial x_2} \left[ Y_2(x_2) \frac{\partial \phi}{\partial x_2} \right] = 0$$

The new independent variables

$$\xi_1 = \int \left( \frac{X_2(x_1)}{X_1(x_1)} \right)^{1/2} dx_1 \quad \xi_2 = \int \left( \frac{Y_1(x_2)}{Y_2(x_2)} \right)^{1/2} dx_2 \quad (17)$$

now provide

$$\frac{1}{M(\xi_1)} \frac{\partial}{\partial \xi_1} \left[ M(\xi_1) \frac{\partial \phi}{\partial \xi_1} \right] + \frac{1}{N(\xi_2)} \frac{\partial}{\partial \xi_2} \left[ N(\xi_2) \frac{\partial \phi}{\partial \xi_2} \right] = 0 \quad (18)$$

where

$$M = (X_2 X_1)^{1/2} \quad N = (Y_2 Y_1)^{1/2} \quad (19)$$

A new dependent variable  $\psi$  is now introduced according to

$$\phi = M^{-1/2} N^{-1/2} \psi \quad (20)$$

Use of (20) in (18) yields

$$\nabla^2 \psi - \left[ \frac{1}{M} \frac{\partial M}{\partial \xi_1} + \frac{1}{N} \frac{\partial N}{\partial \xi_2} \right] \psi = 0 \quad (21)$$

where

$$\nabla^2 \equiv \frac{\partial^2}{\partial \xi_1^2} + \frac{\partial^2}{\partial \xi_2^2}$$

If

$$\nabla^2 (M^{1/2} N^{1/2}) = 0 \quad (22)$$

then from (21)  $\psi$  satisfies Laplace's equation

$$\nabla^2 \psi = 0$$

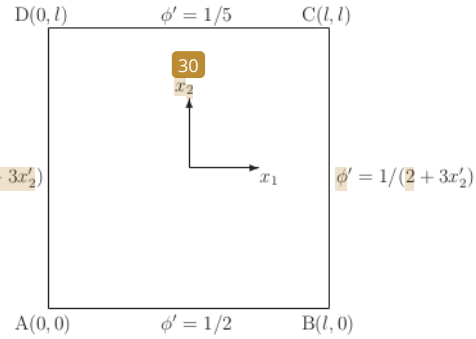


Fig. 1. The boundary conditions for Example 5.1.

Since  $M$  is a function of  $\xi_1$  only and  $N$  is a function of  $\xi_2$  only then in (22)  $M$  and  $N$  must adopt the forms

$$M(\xi_1) = (\alpha \xi_1 + \beta)^2 \quad N(\xi_2) = (\gamma \xi_2 + \delta)^2$$

where  $\alpha, \beta, \gamma$  and  $\delta$  are constants.

The boundary integral equations for  $\psi$  in the new frame  $O\xi_1\xi_2$  may be obtained from (9) and (10) with  $\lambda_{11}^{(0)} = \lambda_{22}^{(0)} = 1, \lambda_{12}^{(0)} = 0$ . Specifically the equation for  $\psi$  is

$$\eta(\xi_0) \psi(\xi_0) = \int_{\partial \Omega_\xi} [\Gamma(\xi, \xi_0) \psi(\xi) - \Phi(\xi, \xi_0) P^{|\omega|}(\xi)] ds(\xi)$$

where  $\Phi$  and  $\Gamma$  are given by (11) with  $k = 0$  and the region  $\Omega_\xi$  with boundary  $\partial \Omega_\xi$  denoting the domain and boundary under consideration referred to the  $O\xi_1\xi_2$  frame.

The boundary integral equation for  $\phi$  is given by

$$\eta(\xi_0) g^{1/2}(\xi_0) \phi(\xi_0) = \int_{\partial \Omega_\xi} \{ [g^{1/2}(\xi) \Gamma(\xi, \xi_0) - P^{|\omega|}(\xi) \Phi(\xi, \xi_0)] \phi(\xi) - [g^{-1/2}(\xi) \Phi(\xi, \xi_0)] P(\xi) \} ds(\xi) \quad (23)$$

where

$$g(\xi) = M(\xi_1)N(\xi_2)$$

#### 5. Numerical examples

In this section some particular BVPs are solved numerically by employing the integral equations obtained in Sections 3 and 4. In implementing this method to obtain numerical results standard boundary element procedure is employed (see for example Clements [3]).

##### 5.1. Example 5.1

Consider a problem governed by an equation of the type (14) for a medium of geometry as shown in Fig. 1 with the coefficients of the forms (15) and (16).

Specifically the problem is governed by

$$\frac{\partial}{\partial x_1} \left[ \lambda_{11}(x_1, x_2) \frac{\partial \phi}{\partial x_1} \right] + \frac{\partial}{\partial x_2} \left[ \lambda_{22}(x_1, x_2) \frac{\partial \phi}{\partial x_2} \right] = 0$$

with coefficients

$$\lambda'_{11}(x_1, x_2) = (1 + 2x_1')^{3/2} (2 + 3x_2')^2$$

$$\lambda'_{22}(x_1, x_2) = (1 + 2x_1')^{1/2} (2 + 3x_2')^2$$

The boundary conditions are (see Fig. 1)

- $\phi' = 1/2$  on AB
- $\phi' = 1/(2 + 3x_2')$  on BC
- $\phi' = 1/5$  on CD
- $\phi' = 1/(2 + 3x_2')$  on AD

13 Table 1 Numerical and analytical results for Example 5.1.

| Position $(x'_1, x'_2)$ | $\phi'$ BEM 8 segments | $\phi'$ BEM 16 segments | $\phi'$ BEM 32 segments | $\phi'$ Analytical |
|-------------------------|------------------------|-------------------------|-------------------------|--------------------|
| (0.9,0.4)               | 0.285323               | 0.313721                | 0.312487                | 0.312500           |
| (0.2,0.1)               | 0.431316               | 0.434713                | 0.434756                | 0.434783           |
| (0.6,0.3)               | 0.344864               | 0.344839                | 0.344834                | 0.344828           |
| (0.8,0.9)               | 0.207950               | 0.212652                | 0.212752                | 0.212766           |
| (0.4,0.6)               | 0.263112               | 0.263144                | 0.263153                | 0.263158           |
| (0.9,0.2)               | 0.396525               | 0.381003                | 0.384669                | 0.384615           |
| (0.5,0.1)               | 0.433516               | 0.434958                | 0.434778                | 0.434783           |
| (0.3,0.8)               | 0.226931               | 0.227248                | 0.227264                | 0.227273           |
| (0.9,0.9)               | 0.185691               | 0.213604                | 0.212776                | 0.212766           |

For this particular problem the coefficients  $\lambda_{11}$  and  $\lambda_{22}$  are of the type (15) and (16) with

$$X'_1(x_1) = (1 + 2x'_1)^{3/2} \quad Y'_1(x_2) = (2 + 3x'_2)^2$$

$$X'_2(x_1) = (1 + 2x'_1)^{1/2} \quad Y'_2(x_2) = (2 + 3x'_2)^2 \tag{28}$$

where  $X'_1 = X_1/\hat{X}_1$ ,  $X'_2 = X_2/\hat{X}_2$ ,  $Y'_1 = Y_1\hat{X}_1/\hat{\lambda}$ ,  $Y'_2 = Y_2\hat{X}_2/\hat{\lambda}$ ,  $\hat{X}_1$ ,  $\hat{X}_2$  are reference values of  $X_1$  and  $X_2$  respectively. Thus from (17) and (19)

$$M' = 1 + 2x'_1 = (\xi'_1)^2 \quad N' = (2 + 3x'_2)^2 = (2 + 3\xi'_2)^2 \tag{23}$$

where,  $M' = M/\hat{M}$ ,  $\hat{M} = (\hat{X}_1\hat{X}_2)^{1/2}$ ,  $N' = N/\hat{N}$ ,  $\hat{N} = \hat{\lambda}/(\hat{X}_1\hat{X}_2)$ ,  $\xi'_i = \xi_i/\hat{\xi}_i$  (for  $i = 1, 2$ ),  $\hat{\xi}_i = (\hat{X}_1\hat{X}_2)^{1/2}i$ . The  $M'$  and  $N'$  satisfy Eq. (22). It follows from (20) that the transformation

$$\phi' = (M')^{-1/2}(N')^{-1/2}\psi'$$

$$= (\xi'_1)^{-1}(2 + 3\xi'_2)^{-1}\psi'$$

where  $\psi' = \psi/(\hat{\phi}\hat{\lambda}^{1/2})$ , transforms the original partial differential equation to

$$\nabla'^2\psi' = 0$$

$$\text{where } \nabla'^2 \equiv \partial^2/\partial\xi'^2_1 + \partial^2/\partial\xi'^2_2.$$

Table 1 shows a comparison between BEM results obtained using Eq. (23) and analytical results for some interior points. The analytical solution to this problem is  $\phi' = 1/(2 + 3x'_2)$ .

5.2. Example 5.2

1 Consider the analytical solution to (1)

$$\phi' = \frac{\sin \beta' x'_2}{\cos(\alpha'_1 x'_1 + \alpha'_2 x'_2)} \tag{24}$$

where  $\alpha'_i = \alpha_i l$  ( $i = 1, 2$ ),  $\alpha_i$  is given in (12) and  $\beta'$  is a dimensionless constant, to a problem for an inhomogeneous material occupying the region of a unit square depicted in Fig. 2.

The coefficients of the material vary with position in the square according to

$$\begin{bmatrix} \lambda'_{11} \\ \lambda'_{22} \end{bmatrix} = \begin{bmatrix} \cos^2(\alpha'_1 x'_1 + \alpha'_2 x'_2) & 0.5 \cos^2(\alpha'_1 x'_1 + \alpha'_2 x'_2) \\ 0.5 \cos^2(\alpha'_1 x'_1 + \alpha'_2 x'_2) & 0.5 \cos^2(\alpha'_1 x'_1 + \alpha'_2 x'_2) \end{bmatrix} \tag{25}$$


1 The boundary conditions are (see Fig. 2)

$P'$  (as may be obtained from (24)) is known on AB, BC and CD  
 $\phi'$  (as may be calculated from (24)) is known on AD

The coefficients (25) may be written in the form (3) with

$$\begin{bmatrix} \lambda'_{11(0)} \\ \lambda'_{22(0)} \end{bmatrix} = \begin{bmatrix} 1 & 0.5 \\ 0.5 & 0.5 \end{bmatrix}$$

$$g(\mathbf{x}) = \cos^2(\alpha'_1 x'_1 + \alpha'_2 x'_2)$$

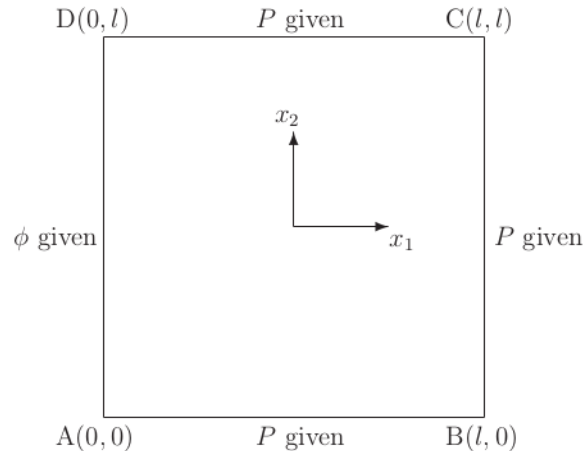

6 Fig. 2. The boundary conditions for Example 5.2 and Example 5.3.

Table 2 BEM and analytical solutions for Example 5.2.

| Position $(x'_1, x'_2)$ | BEM     |                               |                               | Analytical |                               |                               |
|-------------------------|---------|-------------------------------|-------------------------------|------------|-------------------------------|-------------------------------|
|                         | $\phi'$ | $\partial\phi'/\partial x'_1$ | $\partial\phi'/\partial x'_2$ | $\phi'$    | $\partial\phi'/\partial x'_1$ | $\partial\phi'/\partial x'_2$ |
| 40 segments             |         |                               |                               |            |                               |                               |
| (0.3,0.5)               | 0.5064  | 0.0953                        | 0.9886                        | 0.5073     | 0.0877                        | 0.9928                        |
| (0.5,0.5)               | 0.5290  | 0.1322                        | 1.0475                        | 0.5282     | 0.1221                        | 1.0562                        |
| (0.7,0.5)               | 0.5596  | 0.1752                        | 1.1274                        | 0.5566     | 0.1642                        | 1.1391                        |
| (0.9,0.5)               | 0.6031  | 0.3528                        | 1.1864                        | 0.5946     | 0.2182                        | 1.2482                        |
| (0.5,0.1)               | 0.1107  | 0.0307                        | 1.0296                        | 0.1041     | 0.0153                        | 1.0485                        |
| (0.5,0.3)               | 0.3190  | 0.0725                        | 1.0488                        | 0.3157     | 0.0594                        | 1.0642                        |
| (0.5,0.7)               | 0.7362  | 0.2103                        | 1.0199                        | 0.7366     | 0.2042                        | 1.0240                        |
| (0.5,0.9)               | 0.9350  | 0.3116                        | 0.9500                        | 0.9361     | 0.3063                        | 0.9671                        |
| 80 segments             |         |                               |                               |            |                               |                               |
| (0.3,0.5)               | 0.5068  | 0.0913                        | 0.9912                        | 0.5073     | 0.0877                        | 0.9928                        |
| (0.5,0.5)               | 0.5285  | 0.1267                        | 1.0526                        | 0.5282     | 0.1221                        | 1.0562                        |
| (0.7,0.5)               | 0.5580  | 0.1693                        | 1.1340                        | 0.5566     | 0.1642                        | 1.1391                        |
| (0.9,0.5)               | 0.5968  | 0.2119                        | 1.2446                        | 0.5946     | 0.2182                        | 1.2482                        |
| (0.5,0.1)               | 0.1072  | 0.0231                        | 1.0389                        | 0.1041     | 0.0153                        | 1.0485                        |
| (0.5,0.3)               | 0.3171  | 0.0658                        | 1.0571                        | 0.3157     | 0.0594                        | 1.0642                        |
| (0.5,0.7)               | 0.7364  | 0.2073                        | 1.0223                        | 0.7366     | 0.2042                        | 1.0240                        |
| (0.5,0.9)               | 0.9357  | 0.3088                        | 0.9659                        | 0.9361     | 0.3063                        | 0.9671                        |
| 160 segments            |         |                               |                               |            |                               |                               |
| (0.3,0.5)               | 0.5071  | 0.0896                        | 0.9921                        | 0.5073     | 0.0877                        | 0.9928                        |
| (0.5,0.5)               | 0.5284  | 0.1244                        | 1.0545                        | 0.5282     | 0.1221                        | 1.0562                        |
| (0.7,0.5)               | 0.5573  | 0.1668                        | 1.1365                        | 0.5566     | 0.1642                        | 1.1391                        |
| (0.9,0.5)               | 0.5959  | 0.2207                        | 1.2448                        | 0.5946     | 0.2182                        | 1.2482                        |
| (0.5,0.1)               | 0.1057  | 0.0195                        | 1.0433                        | 0.1041     | 0.0153                        | 1.0485                        |
| (0.5,0.3)               | 0.3165  | 0.0628                        | 1.0606                        | 0.3157     | 0.0594                        | 1.0642                        |
| (0.5,0.7)               | 0.7366  | 0.2059                        | 1.0232                        | 0.7366     | 0.2042                        | 1.0240                        |
| (0.5,0.9)               | 0.9359  | 0.3077                        | 0.9663                        | 0.9361     | 0.3063                        | 0.9671                        |

Thus,  $g(\mathbf{x})$  takes the form (12) with  $A = 1$ . The parameters  $k'$  ( $k' = k l^2/\hat{\lambda}$ ) and  $\alpha'_i$  are chosen to be 0.5 and the parameter  $\alpha'_2$  is required to satisfy the condition in (12) ( $\lambda'_{ij(0)}\alpha'_i\alpha'_j = k'$ ). Specifically,  $\alpha'_2$  satisfies

$$\alpha'_2 = \frac{1}{\lambda'_{22(0)}} \left[ -\lambda'_{12(0)}\alpha'_1 + \sqrt{\lambda'_{12(0)2}\alpha'^2_1 - \lambda'_{22(0)}(\lambda'_{11(0)}\alpha'^2_1 - k')} \right]$$

The parameter  $\beta'$  is defined as  $\beta' = \sqrt{k'/\lambda'_{22(0)}}$ .

Table 2 shows a comparison between the BEM and the analytical solutions. The BEM solutions converge to the analytical solutions as the number of segments increases.

**Table 3**  
BEM and analytical solutions for Example 5.3.

| Position<br>( $x'_1, x'_2$ ) | BEM     |                               |                               | Analytical |                               |                               |
|------------------------------|---------|-------------------------------|-------------------------------|------------|-------------------------------|-------------------------------|
|                              | $\phi'$ | $\partial\phi'/\partial x'_1$ | $\partial\phi'/\partial x'_2$ | $\phi'$    | $\partial\phi'/\partial x'_1$ | $\partial\phi'/\partial x'_2$ |
| 40 segments                  |         |                               |                               |            |                               |                               |
| (0.3,0.5)                    | 0.9631  | 0.4751                        | -0.3487                       | 0.9675     | 0.4838                        | -0.3541                       |
| (0.5,0.5)                    | 1.0637  | 0.5305                        | -0.3921                       | 1.0693     | 0.5346                        | -0.3914                       |
| (0.7,0.5)                    | 1.1755  | 0.5886                        | -0.4356                       | 1.1817     | 0.5909                        | -0.4325                       |
| (0.9,0.5)                    | 1.3064  | 0.8583                        | -0.4897                       | 1.3060     | 0.6530                        | -0.4780                       |
| (0.5,0.1)                    | 1.2329  | 0.6192                        | -0.4397                       | 1.2379     | 0.6189                        | -0.4531                       |
| (0.5,0.3)                    | 1.1454  | 0.5717                        | -0.4240                       | 1.1505     | 0.5752                        | -0.4211                       |
| (0.5,0.7)                    | 0.9883  | 0.4909                        | -0.3646                       | 0.9938     | 0.4969                        | -0.3638                       |
| (0.5,0.9)                    | 0.9172  | 0.4580                        | -0.3572                       | 0.9236     | 0.4618                        | -0.3381                       |
| 80 segments                  |         |                               |                               |            |                               |                               |
| (0.3,0.5)                    | 0.9655  | 0.4807                        | -0.3550                       | 0.9675     | 0.4838                        | -0.3541                       |
| (0.5,0.5)                    | 1.0666  | 0.5321                        | -0.3914                       | 1.0693     | 0.5346                        | -0.3914                       |
| (0.7,0.5)                    | 1.1786  | 0.5889                        | -0.4330                       | 1.1817     | 0.5909                        | -0.4325                       |
| (0.9,0.5)                    | 1.3023  | 0.6306                        | -0.4774                       | 1.3060     | 0.6530                        | -0.4780                       |
| (0.5,0.1)                    | 1.2353  | 0.6183                        | -0.4536                       | 1.2379     | 0.6189                        | -0.4531                       |
| (0.5,0.3)                    | 1.1479  | 0.5732                        | -0.4214                       | 1.1505     | 0.5752                        | -0.4211                       |
| (0.5,0.7)                    | 0.9911  | 0.4949                        | -0.3648                       | 0.9938     | 0.4969                        | -0.3638                       |
| (0.5,0.9)                    | 0.9207  | 0.4590                        | -0.3391                       | 0.9236     | 0.4618                        | -0.3381                       |
| 160 segments                 |         |                               |                               |            |                               |                               |
| (0.3,0.5)                    | 0.9665  | 0.4822                        | -0.3542                       | 0.9675     | 0.4838                        | -0.3541                       |
| (0.5,0.5)                    | 1.0679  | 0.5333                        | -0.3911                       | 1.0693     | 0.5346                        | -0.3914                       |
| (0.7,0.5)                    | 1.1801  | 0.5897                        | -0.4324                       | 1.1817     | 0.5909                        | -0.4325                       |
| (0.9,0.5)                    | 1.3042  | 0.6520                        | -0.4782                       | 1.3060     | 0.6530                        | -0.4780                       |
| (0.5,0.1)                    | 1.2364  | 0.6191                        | -0.4537                       | 1.2379     | 0.6189                        | -0.4531                       |
| (0.5,0.3)                    | 1.1490  | 0.5740                        | -0.4204                       | 1.1505     | 0.5752                        | -0.4211                       |
| (0.5,0.7)                    | 0.9924  | 0.4958                        | -0.3641                       | 0.9938     | 0.4969                        | -0.3638                       |
| (0.5,0.9)                    | 0.9222  | 0.4604                        | -0.3387                       | 0.9236     | 0.4618                        | -0.3381                       |

5.3. Exayes mple 5.3

Consider the analytical solution to (1)

$$\phi' = \frac{\exp \beta' x'_2}{\exp(\alpha'_1 x'_1 + \alpha'_2 x'_2)}$$

where  $\alpha'_i = \alpha_i l$  ( $i = 1, 2$ ),  $\alpha_i$  is given in (13) and  $\beta'$  is a dimensionless constant, for a problem which is associated with an inhomogeneous medium as shown in Fig. 2 with coefficients

$$\begin{bmatrix} \lambda'_{ij} \end{bmatrix} = \begin{bmatrix} \exp[2(\alpha'_1 x'_1 + \alpha'_2 x'_2)] & 0.5 \exp[2(\alpha'_1 x'_1 + \alpha'_2 x'_2)] \\ 0.5 \exp[2(\alpha'_1 x'_1 + \alpha'_2 x'_2)] & 0.5 \exp[2(\alpha'_1 x'_1 + \alpha'_2 x'_2)] \end{bmatrix} \quad (26)$$

The boundary conditions are (see Fig. 2)

$P'$  is given on AB, BC and CD

$\phi'$  is given on AD

The coefficients (26) may be written in the form (3) with

$$\begin{bmatrix} \lambda'_{ij} \end{bmatrix} = \begin{bmatrix} 1 & 0.5 \\ 0.5 & 0.5 \end{bmatrix}$$

$$g(\mathbf{x}) = \exp[2(\alpha'_1 x'_1 + \alpha'_2 x'_2)]$$

so that  $g(\mathbf{x})$  takes the form (13) with  $A = 1$ . The parameters  $k'$  and  $\alpha'_1$  are chosen to be  $-0.5$  and the parameter  $\alpha'_2$  is required to satisfy the

condition in (13) ( $\lambda'_{ij} \alpha'_i \alpha'_j = -k'$ ). Specifically,  $\alpha'_2$  satisfies

$$\alpha'_2 = \frac{1}{\lambda'_{22} \alpha'_1} \left[ -\lambda'_{12} \alpha'_1 + \sqrt{\lambda'_{12} \alpha'_1{}^2 - \lambda'_{22} (\lambda'_{11} \alpha'_1{}^2 + k')} \right]$$

The parameter  $\beta'$  is defined as  $\beta' = \sqrt{-k'/\lambda'_{22}}$ .

Again, Table 3 shows that the BEM solutions converge to the analytical solutions as the number of segments increases.

6. Conclusion

Some BEMs are obtained in class of two dimensional elliptic BVPs for FGM. The methods can be applied to a variety of problems in such areas as antiplane strain in elastostatics and plane thermostatic problems for anisotropic FGM.

Acknowledgments

This work was financially supported by the Hasanuddin University's research funding of contract number 3686/UN4.21/LK.23/2017.

References

- Clements DL, Rogers C. Wave propagation in inhomogeneous elastic media with ( $n + 1$ )-dimensional spherical symmetry. *Can J Phys* 1974;52:1246–52.
- Clements DL. A boundary integral equation method for the numerical solution of a second order elliptic equation with variable coefficients. *J Aust Math Soc (Ser B)* 1980;22:218–28.
- Clements D.L. Boundary value problems governed by second order elliptic systems, Pitman, 1981.
- Cheng AH-D. Darcy's flow with variable permeability: a boundary integral solution. *Water Resour Res* 1984;20:980–4.
- Cheng AH-D. Heterogeneities in flows through porous media by boundary element method. *Top Bound Elem Res Appl Geomech* 1987;4:1291–344.
- Rangogni R. A solution of Darcy's flow with variable permeability by means of BEM and perturbation techniques. In: Brebbia C, editor. *Boundary Elements IX*, 3. Berlin: Springer-Verlag; 1987.
- Shaw RP. Green's functions for heterogeneous media potential problems. *Eng Anal Bound Elem* 1994;13:219–21.
- Gipson GS, Ortiz JC, Shaw RP. Two-dimensional linearly layered potential flow by boundary elements. In: Brebbia C, editor. *Boundary Elements XVII*. Berlin: Springer-Verlag; 1995.
- Ang WT, Kusuma J, Clements DL. A boundary element method for a second order elliptic partial differential equation with variable coefficients. *Eng Anal Bound Elem* 1997;18:311–16.
- Clements DL, Azis MI. A note on a boundary element method for the numerical solution of boundary value problems in isotropic inhomogeneous elasticity. *J Chin Inst Eng* 2000;23(3):261–8.
- Azis MI, Clements DL. A boundary element method for anisotropic inhomogeneous elasticity. *Int J Solids Struct* 2001;38:5747–63.
- Azis MI, Clements DL, Budhi WS. A boundary element method for the numerical solution of a class of elliptic boundary value problems for anisotropic inhomogeneous media. *ANZIAM J* 2003;44(E):C79–95.
- Azis MI, Clements DL. Nonlinear transient heat conduction problems for a class of inhomogeneous anisotropic materials by BEM. *Eng Anal Bound Elem* 2008;32:1054–60.
- Azis MI, Clements DL. On some problems concerning deformations of functionally graded anisotropic elastic materials. *Far East J Math Sci* 2014;87(2):173–84.
- Azis MI, Clements DL. A boundary element method for transient heat conduction problem of nonhomogeneous anisotropic materials. *Far East J Math Sci* 2014;89(1):51–67.
- Azis MI. Fundamental solutions to two types of 2D boundary value problems of anisotropic materials. *Far East J Math Sci* 2017;101(11):2405–20.
- Haddade A, Salam N, Khaeruddin, Azis MI. A boundary element method for 2D diffusion-convection problems in anisotropic media. *Far East J Math Sci* 2017;102(8).

## ORIGINALITY REPORT

19%

SIMILARITY INDEX

9%

INTERNET SOURCES

16%

PUBLICATIONS

1%

STUDENT PAPERS

## PRIMARY SOURCES

- 1** Moh. Ivan Azis. "Numerical solutions for the Helmholtz boundary value problems of anisotropic homogeneous media", Journal of Computational Physics, 2019 2%  
Publication
- 2** kmj.knu.ac.kr 2%  
Internet Source
- 3** Moh. Ivan Azis, Kasbawati, Amiruddin Haddade, Sri Astuti Thamrin. "On some examples of pollutant transport problems solved numerically using the boundary element method", Journal of Physics: Conference Series, 2018 1%  
Publication
- 4** Moh. Ivan Azis. "FUNDAMENTAL SOLUTIONS TO TWO TYPES OF 2D BOUNDARY VALUE PROBLEMS OF ANISOTROPIC MATERIALS", Far East Journal of Mathematical Sciences (FJMS), 2017 1%  
Publication

|                 |   |     |
|-----------------|---|-----|
| 5               | Moh. Ivan Azis, Laode Asrul, Khaeruddin, Paharuddin. "BEM SOLUTIONS FOR UNSTEADY TRANSPORT PROBLEMS IN ANISOTROPIC MEDIA", JP Journal of Heat and Mass Transfer, 2018   | 1 % |
| Publication     |   |     |
| 6               | A Galsan, M I Azis, S Aswad, H Halide, R Syam. "On the effect of the material's anisotropy: a numerical investigation for the modified Helmholtz problems of homogeneous media", Journal of Physics: Conference Series, 2019          | 1 % |
| Publication     |   |     |
| 7               | A Haddade, E Syamsuddin, M F I Massinai, M I Azis, A I Latunra. "Numerical solutions for anisotropic-diffusion convection problems of incompressible flow in exponentially graded media", Journal of Physics: Conference Series, 2019 | 1 % |
| Publication     |   |     |
| 8               | <a href="http://www.labmath-itb.or.id">www.labmath-itb.or.id</a>  | 1 % |
| Internet Source |   |     |
| 9               | D. L. Clements. "Fundamental solutions for second order linear elliptic partial differential equations", Computational Mechanics, 1998  | 1 % |
| Publication     |   |     |
| 10              | Abreu, A.I., A. Canelas, and W.J. Mansur. "A CQM-based BEM for transient heat   | 1 % |

conduction problems in homogeneous materials and FGMs", Applied Mathematical Modelling, 2013.

Publication

11

Ang, W.. "A hypersingular boundary integral equation for antiplane crack problems for a class of inhomogeneous anisotropic elastic materials", Engineering Analysis with Boundary Elements, 199907

Publication

1 %

12

Azis, M.I.. "Nonlinear transient heat conduction problems for a class of inhomogeneous anisotropic materials by BEM", Engineering Analysis with Boundary Elements, 200812

Publication

1 %

13

Computational Mechanics '95, 1995.

Publication

1 %

14

[iopscience.iop.org](http://iopscience.iop.org)

Internet Source

1 %

15

Submitted to Universitas Diponegoro

Student Paper

1 %

16

Zlotnik, V.A.. "Entrapped air effects on dipole flow test in sand tank experiments: Hydraulic conductivity and head distribution", Journal of Hydrology, 20070620

Publication

<1 %

|    |   |      |
|----|---|------|
| 17 | <a href="https://hdl.handle.net">hdl.handle.net</a><br>Internet Source  | <1 % |
| 18 | <a href="https://idoc.pub">idoc.pub</a><br>Internet Source  | <1 % |
| 19 | Submitted to Nottingham Trent University<br>Student Paper   | <1 % |
| 20 | <a href="https://agupubs.onlinelibrary.wiley.com">agupubs.onlinelibrary.wiley.com</a><br>Internet Source  | <1 % |
| 21 | Qing Li. "Reactive capacity and inventory competition under demand substitution", IIE Transactions, 08/2008<br>Publication  | <1 % |
| 22 | <a href="https://infoscience.epfl.ch">infoscience.epfl.ch</a><br>Internet Source  | <1 % |
| 23 | Bernabe Rocha Maria Araceli. "Análisis de funciones de $R^2$ en $R$ ", TESIUNAM, 1991<br>Publication  | <1 % |
| 24 | Cheng-Yu Ku, Jing-En Xiao, Chih-Yu Liu, Der-Guey Lin. "On solving elliptic boundary value problems using a meshless method with radial polynomials", Mathematics and Computers in Simulation, 2020<br>Publication | <1 % |
| 25 | W. T. Ang. "A Boundary Element Method for Generalized Plane Thermoelastic Deformations of Anisotropic Elastic Media",   | <1 % |

## Mathematics and Mechanics of Solids,

09/01/1999

Publication

---

26

Whye-Teong Ang. "Numerical solution of a linear elliptic partial differential equation with variable coefficients: A complex variable boundary element approach", Numerical Methods for Partial Differential Equations, 05/2012

Publication

---

<1 %

27

[link.springer.com](http://link.springer.com)

Internet Source

---

<1 %

28

[www.tede2.ufrpe.br:8080](http://www.tede2.ufrpe.br:8080)

Internet Source

---

<1 %

29

Engineering Computations, Volume 21, Issue 5 (2006-09-19)

Publication

---

<1 %

30

Lidia Gileva, Vladimir Shaidurov, Boris Dobronets. "A family of triangular Hermite finite elements complementing the Bogner-Fox-Schmit rectangle", Russian Journal of Numerical Analysis and Mathematical Modelling, 2015

Publication

---

<1 %

31

[pericles.pericles-prod.literatumonline.com](http://pericles.pericles-prod.literatumonline.com)

Internet Source

---

<1 %

[prod-ruor.uottawa.ca](http://prod-ruor.uottawa.ca)

32

Internet Source

<1 %

33

res.mdpi.com

Internet Source

<1 %

34

www.rejournal.eu

Internet Source

<1 %

35

Whye-Teong Ang, David L. Clements, Nader Vahdati. "A dual-reciprocity boundary element method for a class of elliptic boundary value problems for non-homogeneous anisotropic media", Engineering Analysis with Boundary Elements, 2003

Publication

<1 %

Exclude quotes On

Exclude matches < 5 words

Exclude bibliography On